



12

December 1992

NCEL

By Paul Palo and  
Linda Teragouchi

Technical Note

Sponsored By Naval Facilities  
Engineering Command

# VALIDATION OF THE SEADYN90 CABLE SIMULATION MODEL USING A THREE-DIMENSIONAL CABLE DEPLOYMENT DATA SET

DTIC  
SELECTE  
FEB 22 1993  
S B D

**ABSTRACT** This report presents data from a full-scale, three-dimensional cable payout test and the corresponding numerical simulations using the SEADYN90 computer model. The experiment, which was conducted at the Atlantic Undersea Test and Evaluation Center (AUTEC), deployed 10 miles of 3/4-inch-diameter cable from a vessel that followed a predetermined course. Ship position, cable payout rate, and current profile were measured, along with 11 cable descent trajectories at predefined intervals along the cable. The measured data were then input into SEADYN90 with minimal simplifications to ensure that modeling errors could be distinguished from input errors. Qualitative and quantitative comparisons between the numerical and measured trajectories were considered excellent when a normal drag coefficient of  $2.54 \pm 0.1$  (typical of strumming) was used. The results demonstrate that SEADYN90 is capable of accurately modeling realistically complex test scenarios with stochastic current profiles, ship velocities, and payout rates, and that the data set is complete and high quality.

93-03620



7098

NAVAL CIVIL ENGINEERING LABORATORY PORT HUENEME CALIFORNIA 93043-4328



# METRIC CONVERSION FACTORS

## Approximate Conversions to Metric Measures

| Symbol                     | When You Know          | Multiply by                | To Find             | Symbol          |
|----------------------------|------------------------|----------------------------|---------------------|-----------------|
| <b>LENGTH</b>              |                        |                            |                     |                 |
| in                         | inches                 | 2.5                        | centimeters         | cm              |
| ft                         | feet                   | 30                         | centimeters         | cm              |
| yd                         | yards                  | 0.9                        | meters              | m               |
| mi                         | miles                  | 1.6                        | kilometers          | km              |
| <b>AREA</b>                |                        |                            |                     |                 |
| in <sup>2</sup>            | square inches          | 6.5                        | square centimeters  | cm <sup>2</sup> |
| ft <sup>2</sup>            | square feet            | 0.09                       | square meters       | m <sup>2</sup>  |
| yd <sup>2</sup>            | square yards           | 0.8                        | square meters       | m <sup>2</sup>  |
| mi <sup>2</sup>            | square miles           | 2.6                        | square kilometers   | km <sup>2</sup> |
|                            | acres                  | 0.4                        | hectares            | ha              |
| <b>MASS (weight)</b>       |                        |                            |                     |                 |
| oz                         | ounces                 | 28                         | grams               | g               |
| lb                         | pounds                 | 0.45                       | kilograms           | kg              |
|                            | short tons (2,000 lb)  | 0.9                        | tonnes              | t               |
| <b>VOLUME</b>              |                        |                            |                     |                 |
| tsp                        | teaspoons              | 5                          | milliliters         | ml              |
| Tbsp                       | tablespoons            | 15                         | milliliters         | ml              |
| fl oz                      | fluid ounces           | 30                         | milliliters         | ml              |
| c                          | cups                   | 0.24                       | liters              | l               |
| pt                         | pints                  | 0.47                       | liters              | l               |
| qt                         | quarts                 | 0.95                       | liters              | l               |
| gal                        | gallons                | 3.8                        | liters              | l               |
| ft <sup>3</sup>            | cubic feet             | 0.03                       | cubic meters        | m <sup>3</sup>  |
| yd <sup>3</sup>            | cubic yards            | 0.76                       | cubic meters        | m <sup>3</sup>  |
| <b>TEMPERATURE (exact)</b> |                        |                            |                     |                 |
| °F                         | Fahrenheit temperature | 5/9 (after subtracting 32) | Celsius temperature | °C              |

## Approximate Conversions from Metric Measures

| Symbol                     | When You Know                     | Multiply by       | To Find                | Symbol          |
|----------------------------|-----------------------------------|-------------------|------------------------|-----------------|
| <b>LENGTH</b>              |                                   |                   |                        |                 |
| mm                         | millimeters                       | 0.04              | inches                 | in              |
| cm                         | centimeters                       | 0.4               | inches                 | in              |
| m                          | meters                            | 3.3               | feet                   | ft              |
| m                          | meters                            | 1.1               | yards                  | yd              |
| km                         | kilometers                        | 0.6               | miles                  | mi              |
| <b>AREA</b>                |                                   |                   |                        |                 |
| cm <sup>2</sup>            | square centimeters                | 0.16              | square inches          | in <sup>2</sup> |
| m <sup>2</sup>             | square meters                     | 1.2               | square yards           | yd <sup>2</sup> |
| km <sup>2</sup>            | square kilometers                 | 0.4               | square miles           | mi <sup>2</sup> |
| ha                         | hectares (10,000 m <sup>2</sup> ) | 2.5               | acres                  |                 |
| <b>MASS (weight)</b>       |                                   |                   |                        |                 |
| g                          | grams                             | 0.035             | ounces                 | oz              |
| kg                         | kilograms                         | 2.2               | pounds                 | lb              |
| t                          | tonnes (1,000 kg)                 | 1.1               | short tons             |                 |
| <b>VOLUME</b>              |                                   |                   |                        |                 |
| ml                         | milliliters                       | 0.03              | fluid ounces           | fl oz           |
| l                          | liters                            | 2.1               | pints                  | pt              |
| l                          | liters                            | 1.06              | quarts                 | qt              |
| l                          | liters                            | 0.26              | gallons                | gal             |
| m <sup>3</sup>             | cubic meters                      | 35                | cubic feet             | ft <sup>3</sup> |
| m <sup>3</sup>             | cubic meters                      | 1.3               | cubic yards            | yd <sup>3</sup> |
| <b>TEMPERATURE (exact)</b> |                                   |                   |                        |                 |
| °C                         | Celsius temperature               | 9/5 (then add 32) | Fahrenheit temperature | °F              |

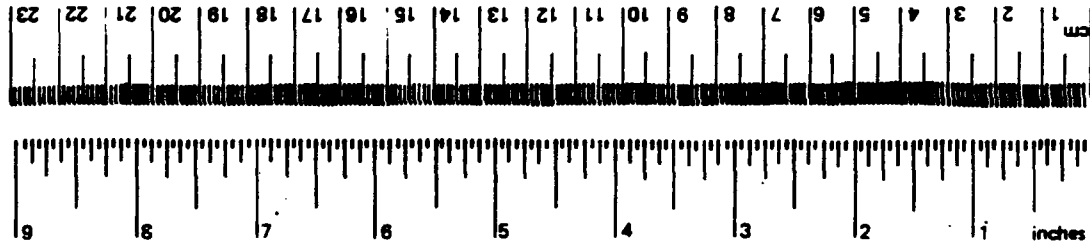

\*1 in = 2.54 (exactly) For other exact conversions and more detailed tables, see NBS Misc. Publ. 286, Units of Weights and Measures, Price \$2.25, SD Catalog No. C13.10.286.

| REPORT DOCUMENTATION PAGE   |   |  | Form Approved<br>OMB No. 0704-018                            |  |
|---|---|--|--|--|
| Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.  |   |  |  |  |
| 1. AGENCY USE ONLY (Leave blank)  |   | 2. REPORT DATE<br><br>December 1992                            |  | 3. REPORT TYPE AND DATES COVERED<br><br>Final: May 1990 through Sep 1991 |
| 4. TITLE AND SUBTITLE<br><br>VALIDATION OF THE SEADYN90 CABLE SIMULATION MODEL USING A THREE-DIMENSIONAL CABLE DEPLOYMENT DATA SET  |   |  | 5. FUNDING NUMBERS<br><br>PR - 44-085<br>WU - DN666284       |  |
| 6. AUTHOR(S)<br><br>Paul Palo and Linda Teragouchi  |   |  |  |  |
| 7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)<br><br>Naval Civil Engineering Laboratory<br>560 Laboratory Drive<br>Port Hueneme, CA 93043-4328   |   |  | 8. PERFORMING ORGANIZATION<br>REPORT NUMBER<br><br>TN - 1849 |  |
| 9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)<br><br>Naval Facilities Engineering Command<br>Chesapeake Division<br>Ocean Engineering and Construction Project Office (FPO-1)<br>Washington, DC 20374-2121  |   |  | 10. SPONSORING/MONITORING<br>AGENCY REPORT NUMBER            |  |
| 11. SUPPLEMENTARY NOTES   |   |  |  |  |
| 12a. DISTRIBUTION/AVAILABILITY STATEMENT<br><br>Approved for public release; distribution is unlimited.   |   |  | 12b. DISTRIBUTION CODE                                       |  |
| 13. ABSTRACT (Maximum 200 words)<br><br>This report presents data from a full-scale, three-dimensional cable payout test and the corresponding numerical simulations using the SEADYN90 computer model. The experiment, which was conducted at the Atlantic Undersea Test and Evaluation Center (AUTEC), deployed 10 miles of 3/4-inch-diameter cable from a vessel that followed a predetermined course. Ship position, cable payout rate, and current profile were measured, along with 11 cable descent trajectories at predefined intervals along the cable. The measured data were then input into SEADYN90 with minimal simplifications to ensure that modeling errors could be distinguished from input errors. Qualitative and quantitative comparisons between the numerical and measured trajectories were considered excellent when a normal drag coefficient of $2.54 \pm 0.1$ (typical of strumming) was used. The results demonstrate that SEADYN90 is capable of accurately modeling realistically complex test scenarios with stochastic current profiles, ship velocities, and payout rates, and that the data set is complete and high quality. |   |  |  |  |
| 14. SUBJECT TERMS<br><br>Cable dynamics, strumming  |   |  | 15. NUMBER OF PAGES<br><br>70                                |  |
|   |   |  | 16. PRICE CODE   |  |
| 17. SECURITY CLASSIFICATION<br>OF REPORT<br><br>Unclassified  | 18. SECURITY CLASSIFICATION<br>OF THIS PAGE<br><br>Unclassified | 19. SECURITY CLASSIFICATION<br>OF ABSTRACT<br><br>Unclassified | 20. LIMITATION OF ABSTRACT<br><br>UL                         |  |

# CONTENTS

|                                       | Page |
|---------------------------------------|------|
| BACKGROUND .....                      | 1    |
| OVERVIEW OF EXPERIMENT .....          | 1    |
| Objective .....                       | 1    |
| Test Description .....                | 2    |
| DATA ACQUISITION .....                | 3    |
| ANALYSES .....                        | 4    |
| SEADYN90 Model .....                  | 4    |
| Input Data .....                      | 4    |
| Validation .....                      | 5    |
| Parametric Analysis .....             | 7    |
| SUMMARY .....                         | 8    |
| ACKNOWLEDGMENT .....                  | 9    |
| REFERENCES .....                      | 9    |
| APPENDIXES                            |      |
| A - SEADYN90 Input Data - Run 6 ..... | A-1  |
| B - SEADYN90 - SOAR Comparisons ..... | B-1  |
| C - Parametric Analyses Results ..... | C-1  |

DTIC QUALITY INSPECTED 3

|                    |                                     |
|--------------------|-------------------------------------|
| Accession For      |                                     |
| NTIS GRA&I         | <input checked="" type="checkbox"/> |
| DTIC TAB           | <input type="checkbox"/>            |
| Unannounced        | <input type="checkbox"/>            |
| Justification      |                                     |
| By                 |                                     |
| Distribution/      |                                     |
| Availability Codes |                                     |
| Dist               | Full and/or<br>Special              |
| A-1                |                                     |

## BACKGROUND

The Southern California Anti-Submarine Warfare (ASW) Range Phase II (SOAR II) was established to extend the existing range off the coast of San Clemente Island, California. This project was initiated to meet the Navy's requirements for an instrumented ASW Range to provide training and enhanced fleet ASW capabilities. The SOAR II Range uses Multiplexed Range Sensor Arrays (MRSA) which consist of 64 hydrophones on eight cables for an expanded range coverage of 500 square nautical miles.

To date, the Navy has never had a cable installation as technically complicated as this one. Each dynamic cable lay required precise placement of eight hydrophones on approximately 40 miles of cable, with variable bathymetry, varying currents, and multiple-curved cable tracks. The eight cable tracks and bathymetry are shown in Figure 1. Each hydrophone had to be placed within a 300-foot radius tolerance circle in 3,000 to 5,000 feet of water.

The Naval Facilities Engineering Command (NAVFAC), Chesapeake Division (CHESDIV) was assigned to procure the cable and install all the components of this ASW range. CHESDIV conducted the planning, engineering design, installation systems testing, and actual installation to execute the SOAR II installation while they maintained the fiscal and administrative control of the assigned tasks (Ref 1).

CHESDIV tasked Makai Ocean Engineering, Kailua, Hawaii, to create a real-time on-site computer model to estimate the cable shape in the water column from which payout rate, ship course, and ship velocity recommendations would be made to ensure placement of the hydrophones within the stringent tolerance circles. Due to the unproven experimental nature of such a computer model, the Naval Civil Engineering Laboratory (NCEL) was tasked to provide a backup capability to the Makai model. The original plans for this backup system called for extensive sets of payout tables created using simulations from the SEADYN90 computer model.

SEADYN90 is a general purpose, finite element, large displacement simulation model for arbitrary cable and truss structures (Ref 2). It was originally developed in 1974 with continual updates over the years. The last major revision occurred in 1990. It was concluded that an at-sea test was necessary to calibrate the SEADYN90 computer model for this particular application and to evaluate many of the mechanical systems to be used in the SOAR II installation. The test was conducted at the U.S. Navy Atlantic Undersea Test and Evaluation Center (AUTEC) Weapons Tracking Range east of Andros Island, Bahamas from 14 through 24 July, 1990. NCEL was responsible for data reduction and reporting, and all of the SEADYN90 simulations for this calibration effort.

## OVERVIEW OF EXPERIMENT

### Objective

The purpose of the SEADYN calibration test at AUTEC was to produce an extensive record of the cable trajectories, vessel track, cable payout rate, and environmental data to use as input for the SEADYN90 calibration effort.

## Test Description

Seven experimental runs were completed at the AUTECH Weapons Tracking Range (see Table 1). Six tests consisted of instrumenting and deploying a 10-mile sample of cable with 11 acoustic tracking pingers (see Appendix A for hardware description). The cable was deployed along a predetermined path from the OCP SEACON, a 260-foot Navy construction barge equipped with a Voit-Schneider Propulsion System for accurate dynamic positioning. The descent trajectories of the tracking pingers were monitored by the AUTECH Range Control Center.

The test sequences for Runs 1, 2, 3, 6, and 7 were essentially the same in design. The barge held position while the anchor end of the cable was lowered and set on the seafloor. The barge then ramped to the steady-state speed, slowly paying out cable to obtain the dynamic equilibrium configuration. The barge maintained a 1.5-knot velocity with 11 percent cable slack for the remainder of the test. Approximately 10 miles of cable were deployed 500 to 1,000 yards to the east and/or south of the tracking range including 45-degree and 90-degree course changes. The five tests varied in barge course, attachment of in-line Multiplex Transmission Units (MTUs), and placement of acoustic pingers. As shown in Table 1, not all of the 11 pingers functioned appropriately for many of the tests.

The objective of Run 4 was to determine what effects an abrupt change in the barge's path had on the cable/pinger path. The testing scenario for this experiment was as follows. The barge maintained a straight line course at 1.5 knots through the entire descent of the first pinger to acquire a baseline model. Twenty minutes after the next functional pinger entered the water, the barge moved off track 750 feet. The barge returned to the original track upon touchdown of this pinger. The barge was again moved 750 feet off track 5 minutes after the last pinger was deployed. No postprocessing or analyses was completed for this experiment.

Table 1. Overview of SOAR Simulations

| Run | Date | Type      | MTU | Operational Pingers | SEADYN90 Analyses |
|-----|------|-----------|-----|---------------------|-------------------|
| 1   | 7/15 | 90° Turn  | N   | 8                   | 0                 |
| 2   | 7/16 | 45° Turn  | N   | 8                   | 2                 |
| 3   | 7/18 | 0° Turn   | N   | 0                   | 0                 |
| 4   | 7/19 | Influence | N   | 3                   | 0                 |
| 5   | 7/20 | Tow       | N   | 3                   | 5                 |
| 6   | 7/22 | 90° Turn  | Y   | 11                  | 20                |
| 7   | 7/22 | 45° Turn  | Y   | 11                  | 12                |

Run 5 was completely different from the other six AUTECH tests conducted in this test series because it was a steady-state tow test with no payout. Run 5 was designed to find a drag

coefficient appropriate for this particular type of cable. The cable was instrumented with three acoustic tracking pingers. They were spaced 600 feet apart, starting within 3 feet of the 275-pound concrete block anchor. The 1,800 feet of cable was lowered off the stern of the SEACON. The barge then maintained a straight line course with constant velocity until it was believed a steady-state tow configuration had been achieved. The steady-state speeds included 0.5, 1.0, and 1.5 knots.

## DATA ACQUISITION

Data was collected at the AUTECH Range Control Center and aboard the OCP SEACON as summarized in Table 2. The Control Center monitored the descent of the acoustic tracking pingers attached to the cable. A pinger was also attached to the hull of the SEACON. This pinger provided an unbiased record of the ship's path during the experiments.

Table 2. Sources of Data

| AUTECH (9-track tapes, plots)         |                      |
|---------------------------------------|----------------------|
| Time*                                 | Position*            |
| Ship                                  | Velocity*            |
| Pinger                                | Acceleration         |
| Current (Bounce Pingers)              | Advance*             |
| Phrognav (5-1/4-inch disks, printout) |                      |
| Time                                  | Position             |
|                                       | Velocity             |
|                                       | Acceleration         |
| Ship                                  | Advance              |
|                                       | Heading              |
| Cable                                 | Length               |
|                                       | Payout Rate*         |
| Current (ADCP)                        | Velocity             |
|                                       | Heading              |
| Manual Entry Notes                    |                      |
| Payout Tables                         | Time                 |
|                                       | Distance along Track |
|                                       | Ship Velocity        |
|                                       | Cable Length         |
|                                       | Payout Rate          |

\*Data used for analyses.

The Range Control Center also logged the current velocity profile data gathered by the Bounce Pingers. For the majority of the tests, two Bounce Pingers were deployed simultaneously with a 1-mile separation to measure spatial variations. The Bounce Pingers had a maximum depth of 3,600 feet. Therefore, no information was gathered for the lowest quarter of the water column since the seafloor in the testing area was at 4,900 feet.

The Pelagos Phrognav Integrated Navigational System aboard the SEACON monitored the barge position, barge heading, and cable payout rate. The barge position data was acquired using a Sercel Syledis Radiopositioning System. Five Syledis antennas were installed on Andros Island for this project. The real-time positioning information received from Syledis was used to pilot the vessel. The Syledis positioning data was not used in the analysis because the pinger mounted on the hull provided unbiased barge position data that was consistent with the cable trajectory data.

Barge heading was acquired from the barge's gyro and recorded on disk by the Phrognav system. Phrognav also logged the cable payout rate and length gathered from a Red Lion Cable Counter.

The SEACON was also instrumented with a 150-kHz Acoustic Doppler Current Profiler (ADCP). The ADCP measured current profile data for the top 1,200 feet of the water column during each experiment. Due to the redundancy of the data gathered from the Range Control Center (i.e., the Bounce Pinger current profile data), the ADCP data was not used in later analyses.

## **ANALYSES**

### **SEADYN90 Model**

SEADYN90 was used as the primary model for simulating the data recovered from the AUTECH sea trials. SEADYN90 is a general purpose finite element cable model which can perform static, time domain dynamic, and modal analyses. SEADYN90 uses a discrete element approach to model cable systems. It can be considered a combination of the finite element method and the lumped parameter method where lines are modeled by the finite element method with bodies being lumped at the node points (Ref 3). SEADYN90 can simulate almost any cable problem of interest, including: three dimensions; multi-material lines; nonlinear stress-strain characteristics; arbitrarily positioned anchors and buoys; spatially and time-varying current fields; time-varying point loads and payout/reel-in; surface and bottom constraints; user-definable drag coefficients as a function of velocity; and user-defined nodal displacements, velocity, and accelerations (Ref 4). Using a SUN workstation Sparc 1 as the working platform for the SEADYN90 computer model, a 12-to-1 ratio of CPU-to-real-time was required for this application.

### **Input Data**

Data retrieved from the tests were entered into SEADYN90 with minimal simplifications (see Appendix A). SEADYN90 is capable of accepting variations in current with respect to depth, and temporal variations in ship speed, ship heading, and payout rate. The ability to use actual test conditions with minimal simplifications was very important in that modeling errors



could be identified separately from input errors. The variability shown in the measured nodal trajectories made this particularly important.

The Bounce Pingers, which were dropped simultaneously with a 1-mile separation, returned essentially the same data. The current data collected from these were applied for the entirety of each test. The data were edited and smoothed before they were entered into the SEADYN90 model. Since no current data was gathered for the lowest quarter of the water column, several trial profiles were constructed using apparent trends in the measured current data and cable trajectories. The three predominate trial profiles are presented in Appendix A.

The dynamic coordinates at the point of cable deployment (barge's stern position) were calculated and read by SEADYN90 from an ASCII data file. AUTECH Range Control Center provided a filtered estimate of the barge position once per second. This data was then edited for wild points, averaged over 30 seconds, and stored in ASCII input files. SEADYN accessed these files and interpolated barge speed and position versus time.

The cable payout rate was printed out once per minute by the Phrognav SINCS system aboard OCP SEACON. This data was smoothed and wild points removed before it was linked into SEADYN90 as a user-defined subroutine. The trends in the processed payout rate data were followed very closely to best emulate the dynamic characteristics of the cable descent.

There were a few minor simplifications made when creating the SEADYN90 discrete model. The positions along the cable of the modeled pingers were adjusted slightly (no more than 150 feet) to maintain consistent element lengths. Also, some simplifications were made in the vessel track and payout functions prior to the release of the first pinger (during the initial ramping period) to reduce modeling time. Sufficient time was given in the model prior to the deployment of the first pinger to allow the cable to numerically return to its natural configuration.

## **Validation**

The validation efforts concentrated on Run 6. Twenty SEADYN90 simulations were executed for this test. A catalogue of pertinent simulation parameters can be seen in Table 3.

The initial simulations showed little agreement between the measured and simulated pinger trajectories. The current profile was changed; since no data was gathered for the lowest 1,300 feet of the water column, this appeared to be the most likely source of error. However, significant changes in the current profile for this section of the water column made no significant improvement on the cable trajectory comparisons. The next possible suspected error was the (default) normal drag coefficient of 1.27. The drag coefficient was doubled for simulation 6b, as the case when strumming occurs, and immediately the measured and simulated pinger trajectories closely compared.

Appendix B displays the comparison between the actual pinger trajectories and the numerically simulated data obtained using the double drag and "probable" current profile. These graphs indicate that SEADYN90 is able to accurately reproduce the cable response with respect to all of the applicable input parameters and a known drag coefficient (which was known only through inference using the measured data in this case). Qualitatively, the simulated nodal trajectories precisely followed the path of the AUTECH data for most of the pingers. On each graph there are three numbered points marked along the AUTECH (measured) cable path where the trajectory significantly altered course. At each of these points the SEADYN90 data also significantly altered direction. There is often a slight mismatch between the graphed surface points (the asterisks) of the AUTECH data and the SEADYN90 data. This is due to the fact that

Table 3. SEADYN90 Simulations for Run 6

| Simulation Label     | Drag Coefficient          | Current Profile   |
|----------------------|---------------------------|-------------------|
| a. first look        | default                   | conservative      |
| b. current change    | default                   | extreme           |
| f. double drag       | double $C_n^a$ & $C_t^b$  | extreme           |
| g. current change    | double $C_n$ & $C_t$      | conservative      |
| h. *reference run*   | double $C_n$ & $C_t$      | probable          |
| i. current change    | double $C_n$ & $C_t$      | 1.15*probable     |
| l. drag change       | 2.4* $C_n$ , double $C_t$ | probable          |
| q. drag change       | 1.8* $C_n$ , double $C_t$ | probable          |
| p. current change    | double $C_n$ & $C_t$      | no current        |
| m. 9.5% slack        | double $C_n$ & $C_t$      | probable          |
| o. 2*element length  | double $C_n$ & $C_t$      | probable          |
| r. scale to 2 knots  | double $C_n$ & $C_t$      | probable          |
| s. shift shear depth | double $C_n$ & $C_t$      | probable + 400 ft |
| t. rotate current    | double $C_n$ & $C_t$      | $V_x < == > V_y$  |

<sup>a</sup> $C_n$  = normal drag coefficient.

<sup>b</sup> $C_t$  = tangential coefficient.

the AUTECH pingers were pressure activated to start transmitting 30 to 100 feet below the water surface while the numerical trajectories were graphed from the time the simulated pinger left the vessel. Also, the pinger locations in the SEADYN90 model were adjusted slightly along the length of the cable ( $\pm 150$  feet) to maintain uniform element lengths; this introduces a bias which appears as an apparent difference in the trajectories.

The similarities in the numerical and measured nodal trajectories provided sufficient circumstantial evidence that the cable was strumming during descent. However, additional calibration of the increased drag coefficient was deemed necessary, so Runs 2 and 7, with 45-degree turns, were also modeled with the doubled drag coefficient. As with Test 6, the results were excellent (see figures in Appendix B). This further increased the confidence in the accuracy of the data, and reinforced the conclusion that the cable was strumming during the descent. Thus, the best (back-fitted) normal drag coefficient as determined from these simulations was approximately 2.54.

The SEADYN90 best-fit simulations imply that the cable was strumming during its entire descent through the water column. This is consistent with other cable drag measurements such

as those reported in Reference 5. For additional verification of this hypothesis, the SOAR cable dynamic problem was discussed with a consultant. After review of the dynamic data for this cable's descent, the consultant agreed that the cable appeared to be strumming. From an independent strumming analysis, he estimated that the normal drag coefficient ranged from 2.3 near the surface and 1.7 near the seafloor. While the drag coefficient of 2.5 that was used in the "best-fit" SEADYN comparisons is slightly higher, it is much more realistic than the customary default value of 1.27.

The question of the distribution of the drag coefficient over the cable was further investigated by simulating the steady tow test - Run 5. As previously discussed, the objective of Run 5 was to measure the equilibrium cable configuration at three different tow speeds. More exactly, the objective was to measure the position of the three acoustic pingers attached to the cable. This was accomplished for 0.5-, 1.0-, and 1.5-knot steady tow speeds.

The tow test was then simulated twice using SEADYN90, with default and then doubled (strumming) drag coefficients assumed constant over the entire cable. The results are shown in Figure 2. In Figure 2, all lines with the "x" correspond to the 0.5-knot tow speed; the "o" and the "\*" correspond to 1.0 and 1.5 knots, respectively. The solid line is merely a low-order polynomial fitted to aid the eye in visualizing the measured cable shape as defined only by the three pinger positions.

At the 0.5-knot speed, the cable is obviously nonstrumming since the strumming shape is unacceptably different compared to the measured shape. However, a variable drag coefficient is necessary to model the higher tow speeds. In both cases, the strumming coefficient is needed to accurately model the upper half of the cable, but it diverges over the lower half. A "best fit" would therefore involve a high drag over the top of the cable and a low drag over the lower portion (i.e., variable over the cable length).

This qualitative conclusion confirms the increased and variable coefficient predicted by the consultant.

Additional parametric simulations were completed on Run 6 to reinforce that the cable drag coefficient should be 2.54. The normal drag coefficient was varied by +20 percent and -10 percent (3.0 and 2.3). Even though these simulated cable trajectories generally followed the same patterns, the results from these additional SEADYN90 simulations did not match the actual cable path nearly as well as those from the simulation using 2.54 as the drag coefficient. The results from these simulations can be seen in Appendix C. This substantial evidence is considered reasonable proof that the value of 2.54 for the drag coefficient used in SEADYN90 is real and not artificial for numerical convenience. This completed the modeling of the AUTECH test data.

### Parametric Analysis

Several additional parametric runs were made to further investigate the generic behavior of the SOAR cable during descent and to anticipate some of the questions expected in the "ship path-payout tables" simulation phase. These runs examined cable response versus payout function/percent slack, magnitude and incident angle of current, and element length. The cable response was observed for sensitivity to these parameters based on nodal position relative to the turn: before, during, and after. Figure A-2 in Appendix A illustrates that pingers 1 through 4 were not affected by the turn region, where pingers 5 through 7 fell within the turn region. Representative pinger trajectories for each parametric analysis can be seen in Appendix C.

Second, it was concluded that 30 suspended cable elements or, equivalently, 380-foot element lengths, are needed in SEADYN90 to accurately model the cable shape in the water column. An effort to use 20 suspended elements did not give accurate results. Decreasing the number of elements increases the element lengths (by 50 percent in this case) which in turn reduces the simulation time.

A significant effort was put into analyzing the effects of current on the cable trajectory. Three parametric cases were simulated where only the northing component of the current in the lowest quarter of the water column was altered. Changing the lowest magnitude of the current for this section from the "probable" +0.30 ft/sec to the "extreme" -0.15 ft/sec (a difference of 0.27 knots) caused a change in the touchdown position of the cable of up to 200 feet for nodes outside of the turn region. Within the turn region, this alteration in current was virtually insignificant.

One of the parametric cases studied the effects of eliminating the current. As expected, removing the current caused the cable trajectory to primarily follow the barge path outside of the turn region. This behavior was dissimilar to the snake-like path of the cable influenced by the current. However, within the turn region, there was minimal change in cable trajectory generated by removing the current.

Two final parametric analyses were conducted which involved manipulation of the current. The first simulation "shifted" the current down by adding 400 feet to each depth value (except at the surface) leaving the corresponding x and y current velocities the same. The second analysis "rotated" the current by swapping the x and y current velocities, effectively changing the incident angle of the current but not the magnitude or depth. As with the other current parametric analyses, significant differences in cable shape were seen outside the turn region with minimal dissimilarities found in the turn region. However, none of these changes improved the comparisons to the measured trajectories.

## SUMMARY

There were many significant conclusions from this study. First, the SEADYN90 validation test at AUTECH produced an excellent data set. This data set records the three-dimensional deployment of 10 miles of cable, including one attached mass, in 4,900 feet of water. The cable trajectory during descent was measured in 11 positions at 1/2- to 1-mile intervals on the cable and was found to be quite complex. The actual barge track and cable payout were also recorded. The current profile was measured down to 3,600 feet.

Second, the numerical studies showed that comprehensive models like SEADYN90 are capable of efficiently modeling payout operations under realistic conditions. Only minimal simplifications were needed to create the input file. SEADYN90 is capable of handling variations in current with respect to depth and stochastic variations in ship speed, ship heading, and payout rate.

Third, it has been shown that the normal drag coefficient of the SOAR II cable in this deployment scenario is approximately  $2.54 \pm 0.13$ . This increase in drag coefficient over the typical default value of 1.27 is due to the cable strumming during its descent through the water column. Calculations conducted by a consultant independently confirmed that the cable was strumming. The parametric analyses showed that it is extremely important to accurately model the drag on the cable. The uncertainty in selecting the correct drag coefficient is considered the largest source of error in the numerical cable modeling process.

Fourth, the SEADYN90 simulations also established that the cable has two separate behavioral responses dependent on the barge's path. When the cable is not affected by the barge changing course, it responds primarily to cross-track current and the payout rate. Other parameters have minimal effect on the cable while it is outside the turn region. However, within the turn region, the cable descent is relatively insensitive to the current. The barge's position and cable slack are the predominant influences.

Last, the calibration effort determined that SEADYN90 can accurately create a set of payout tables for the SOAR II installation. However, it would be impractical to create such an extensive set of payout tables. The SOAR installation requires precomputed information on ship's path and payout rate versus leg orientation, incident current profile ( $x, z, t$ ), and bottom topography. A comprehensive examination of these parameters is not considered possible because of the inability to premeasure on-site conditions and also due to time/CPU constraints.

## ACKNOWLEDGMENT

The successful completion of this project required the efforts of many organizations and individuals. The authors wish to thank all the personnel from the organizations who contributed to this effort: Chesapeake Division (FPO-1C) of the Naval Facilities Engineering Command, particularly the SOAR project manager, Ms. Sandra Vickstrom; General Offshore, Inc.; Naval Underwater System Center (NUSC), Newport, RI; and the Atlantic Undersea Test and Evaluation Center.

## REFERENCES

1. Naval Facilities Engineering Command, Chesapeake Division. Project execution plan FPO-1-91(16): SOAR II installation. Washington, DC, Apr 1991.
2. Naval Civil Engineering Laboratory. Technical Note N-1803: SEADYN90 User's manual, by R.L. Webster. Port Hueneme, CA, Nov 1989.
3. \_\_\_\_\_. Contract Report CR-82.019: SEADYN mathematical manual, by R.L. Webster, Consulting Engineer. Brigham City, UT, Apr 1982 (Contract No. N62474-81-C-9391).
4. P.A. Palo, D.J. Meggitt, and W.J. Nordell. "Dynamic cable analysis models," 15th Annual Offshore Technology Conference, Houston, TX, 2-5 May 1983, pp 487-494.
5. D.R. Yoerger, et al. "Drag forces and flow-induced vibrations of a long vertical tow cable - Part 1: Steady-state towing conditions," Journal of Offshore Mechanics and Arctic Engineering, vol 113, May 1991, pp 117-127.

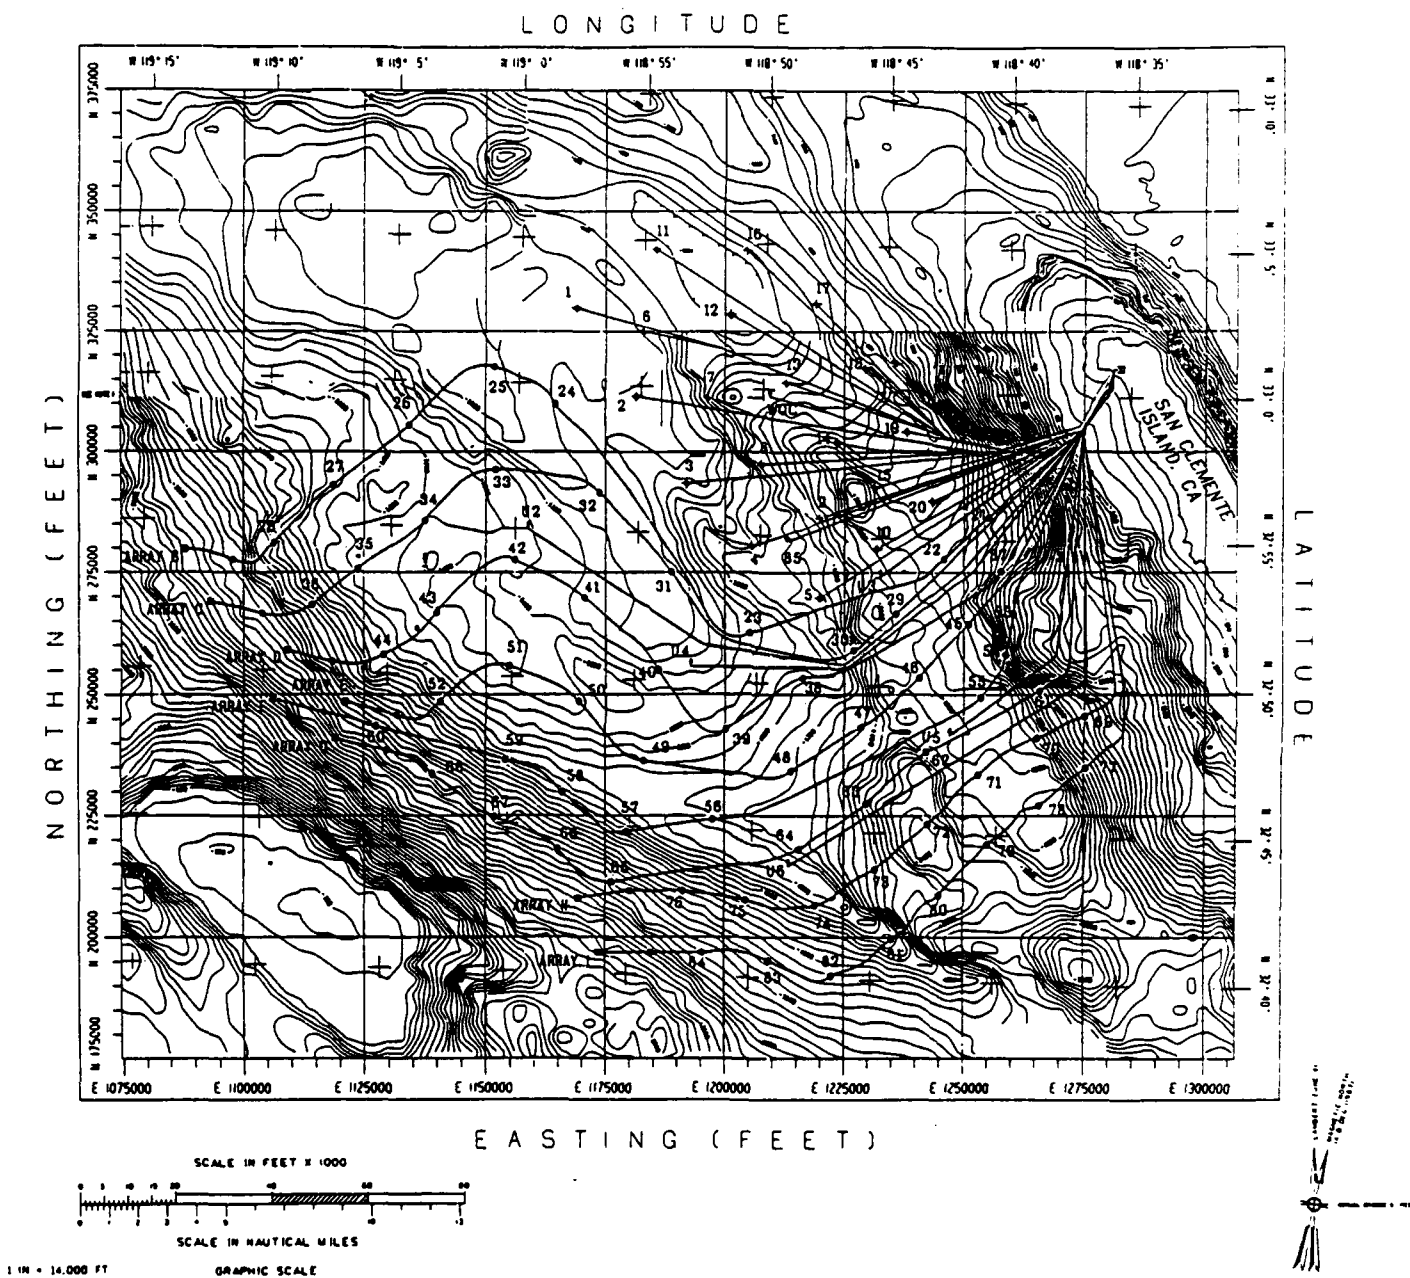


Figure 1. SOAR II configuration.

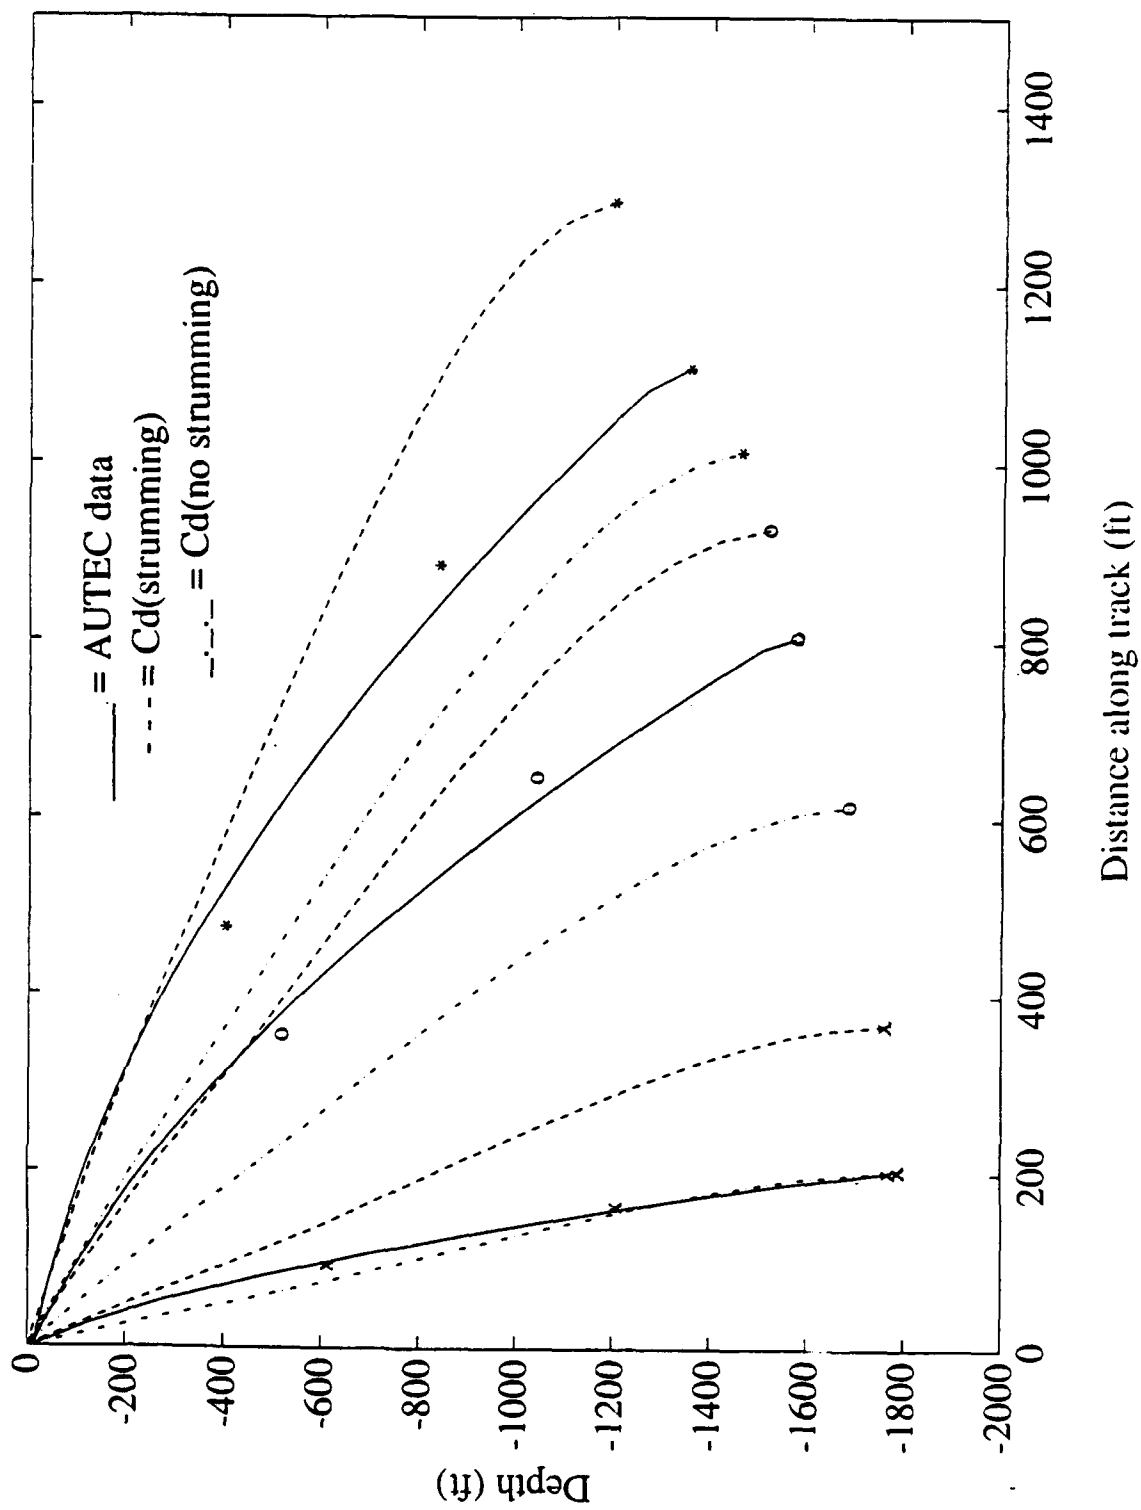


Figure 2. Profile view of tow test cable shapes.

## Appendix A

### SEADYN90 INPUT DATA - RUN 6

A SEADYN90 input file was developed from the data gathered at AUTECH. Minimal simplifications were made to the input variables. A representative input file is shown as Table A-1.

During each test, approximately 10 miles of cable were deployed, including the 1 mile of cable deployed vertically to set the anchor. The hardware dimensions are listed in Table A-2. Eleven acoustic tracking pingers were attached at various intervals on the cable (see Table A-3). A dummy hydrophone was spliced into the cable close to one of the pingers so the effects of this body could be monitored.

Other input entered into the SEADYN90 file include current profile, barge position, and cable payout rate, which are seen in the following graphs. The current profile was interpolated from the data gathered from the two Bounce Pingers deployed simultaneously, 1 mile apart. Figure A-1. shows the data gathered from both Bounce Pingers (descending and ascending) separated into Easting and Northing components. From this figure it can be seen that the four data sets match very well. Overlaid on the Bounce Pinger data is the SEADYN90 input data defined as the "probable" current profiles. The x and y velocities were entered into the SEADYN input file by dividing the current profile into 10 nonuniform sections. Figures A-2 and A-3 show other current profiles applied to the Run 6 data set for parametric analyses.

The barge track and pinger touchdown locations are illustrated in Figure A-4. It is clear even from the scale of this graph that the ship did not follow a straight line path. To model the ship's path without losing the cross-track movement, ship's position (recorded every 30 seconds) was entered into an ASCII file which was subsequently read by the SEADYN program. Figure A-5 illustrates the cable payout rate for Run 6. The dashed line represents the data gathered from the Phrognav SINCS system aboard the OCP SEACON. The solid line represents the data input into SEADYN90 as a user-defined subroutine. The trends were closely followed to accurately model the test conditions.



Table A-1. Sample SEADYN90 Input

SEADYN-AUTEC VALIDATION EXPERIMENT  
RUN#6-h. 90 DEG TURN @ 1.5 KTS W/MTU reference simulation.

```

1. Drag coefficient was effectively doubled by instead doubling
   the cable diameter. The "doubled Reynolds Number" is still in
   the same range so this is a valid modeling simplification.
2. "Probable" current profile used for the lowest 1300 feet.
   Northing component of bottom layer current (+.15ft/sec).$
* 11% SLACK LAY, FLAT BOTTOM, CONSTANT (TEMPORAL) CURRENT PROFILE
PROBLEM
  170,169,-3,1
FLUID
  ,1
BODY
  1, ,65,1.176,4.458      * MTU
  2, ,25,0.333,4.375      * PINGER
MATE
  1, ,.110,.16W9,992146,1,.03  * CAGED ARMOR CABLE. Note doubled diameter.
NODE
  1, ,47924,-77929,-4900      * NODE 1 IS ANCHOR ON BOTTOM: FREE FIXITY
                                TO ALLOW FOR AUTOMATIC NODE GENERATION.
                                !!FIX NODE LATER IN DEAD!!
  9,1,49053,-77533,-1493.9    * NODE 9 PLACED TO FORCE CABLE INTO AN
                                INVERTED CATENARY (actually, "L") SHAPE.
  13,1,50008,-77197,      0,2,2,2 * NODE 13 IS THE INITIAL STERN POSITION
  170,1,50008,-77197,      0,2,2,2 * NODES TO BE PAYED-OUT ONBOARD VESSEL
PAYOUT
  1, 13, 12,380,156, 12,1,1    * BEGIN PAYOUT AT NODE 13, MITOSIS = 380 FT
ELEMENT
  1, 1, 2,,1
  169,169,170,,1
TENS
  2, 5,,,150                  * APPROXIMATE ONLY.
  6, 9,,,400
  10,13,,,600
LIMIT
  1,-4900,,1.02,3
LLOC
  1,2,145,1
BLOC
  1,43                        * CABLE FINGERS, node # with AUTEC pinger #:
  2,27                        * MTU, pinger #401
  2,36                        * 501
  2,45                        * 301
  2,49                        * 502
  2,55                        * 302
  2,61                        * 402
  2,75                        * 503
  2,89                        * 304
  2,109                       * 504
  2,130                       * 305
  2,130                       * 505
TFUN
  1,1,-703.5,      0,-480,3.2091 * CALL NODMOV.DAT FOR SHIP PATH
  2,6, -480,18541,-480           * call usrtfn, with tparm=test#=6.
  3,-1,6                                                     * upward ramp used as curr multiplier
  4,1,-703.5,      0,-480,1     * downward ramp used as curr multiplier
  5,1,-703.5,      1,-480

```

Table A-1. Continued

FLOW

\* define current vector at 10 depths, constant versus time.

| * depth              | Vx     | Vy   | Vz                | depth             | Vx           | Vy          | Vz | depth | Vx | Vy | Vz | depth | Vx | Vy | Vz |
|----------------------|--------|--|-------------------|-------------------|--------------|-------------|----|-------|----|----|----|-------|----|----|----|
| 1,2                  | -4901, | 0,   | .15,0,-3600,-.10, | .30,0,-3010,-.35, | .20,0,-2500, | .05,-.10,0, |    |       |    |    |    |       |    |    |    |
|                      | -2000, | .05,-.40,0,-1500,-.075,-.3,0,-1070,+.20,.075,0,-890, | 0,                | .10,0,            |              |             |    |       |    |    |    |       |    |    |    |
|                      | -490,  | 0,   | .80,0,            | 0,                | .10,-.25,0   |             |    |       |    |    |    |       |    |    |    |
| 2,1,-1.5871,-.5776,0 |        |  |                   |                   |              |             |    |       |    |    |    |       |    |    |    |

\*1.0kts @ 250 deg (opposite of ship velocity)

TABL

1,1,145W11,1

\* ----- initial static configuration -----

LIVE

FIX,3,11,12,13

\* fix the anchor

CURR,2

\* steady flow to get initial configuration.

\* ----- initial dynamics, ramped to avoid transients -----

DYN

MOVE,-1,2,4,3.0624,.9568

\* ramp ship to 3.2 ft/sec

CURR,2,1,5,1,1,4

\* ramp steady current down to zero

\* and test current (varied w/ depth) up to full vel.

OUTP,,223.5W15,1,60,1W20,1

PAYO,1,3,1

\* tfun set #3 (which calls usrtfn)

TIME,0.03,-480,-703.5,1

SAVE,-1

\* ----- "steady-state" dynamic deployment -----

DYN

MOVE,-1,1,2,1

\* 300 plot.dat entries.

CURR,1,1

\* ship

OUTP,,600W15,1,179,1W20,2

\* follow 10-point flow descrptn.

PAYO,1,3,1

\* write plot.dat and limit.dat files @ 3 min.

TIME,0.03,18541,,1

\* tfun set #3 (which calls usrtfn)

SAVE,-6

\* net simulation time = 19021 seconds.

END

Table A-2. Hardware Description

Cable Parameters

|                   |   |                               |
|-------------------|---|-------------------------------|
| diameter          | = | 0.66 inches                   |
| weight per foot   | = | 0.16 lb (submerged)           |
|                   | = | 0.304 lb (in-air)             |
| EA                | = | $9.925e^5$ lb                 |
| breaking strength | = | 9,000 lb (minimum) (not used) |

Hydrophone(MTU) Parameters

|        |   |                                      |
|--------|---|--------------------------------------|
| length | = | 54 inches                            |
| height | = | 22 inches (used diameter = 14 inches |
| width  | = | 10 inches in SEADYN simulations)     |
| weight | = | 200 lb (in-air)                      |
|        | = | 65 lb (submerged)                    |

Pinger Parameters

|          |   |                   |
|----------|---|-------------------|
| length   | = | 52 inches         |
| diameter | = | 4 inches          |
| weight   | = | 25 lb (submerged) |

Anchor Parameters

|        |   |                    |
|--------|---|--------------------|
| weight | = | 275 lb (submerged) |
|--------|---|--------------------|

Table A-3. Pinger Locations (from anchor)

| Pinger No. | AUTEC Distance Along Cable (ft) | SEADYN90 Distance Along Cable (ft) |
|------------|---------------------------------|------------------------------------|
| 1          | 10,867                          | 10,732                             |
| 2          | 14,167                          | 14,152                             |
| 3*         | 16,782                          | 16,812                             |
| 4          | 17,582                          | 17,572                             |
| 5          | 19,182                          | 19,092                             |
| 6          | 21,432                          | 21,372                             |
| 7          | 23,682                          | 23,652                             |
| 8          | 28,907                          | 28,972                             |
| 9          | 34,127                          | 34,292                             |
| 10         | 41,962                          | 41,892                             |
| 11         | 49,787                          | 49,872                             |

\*Hydrophone.

# AUTEC Sea Trials-Current Profile Run 6 90 deg. Turn @ 1.5 kts w/MTU

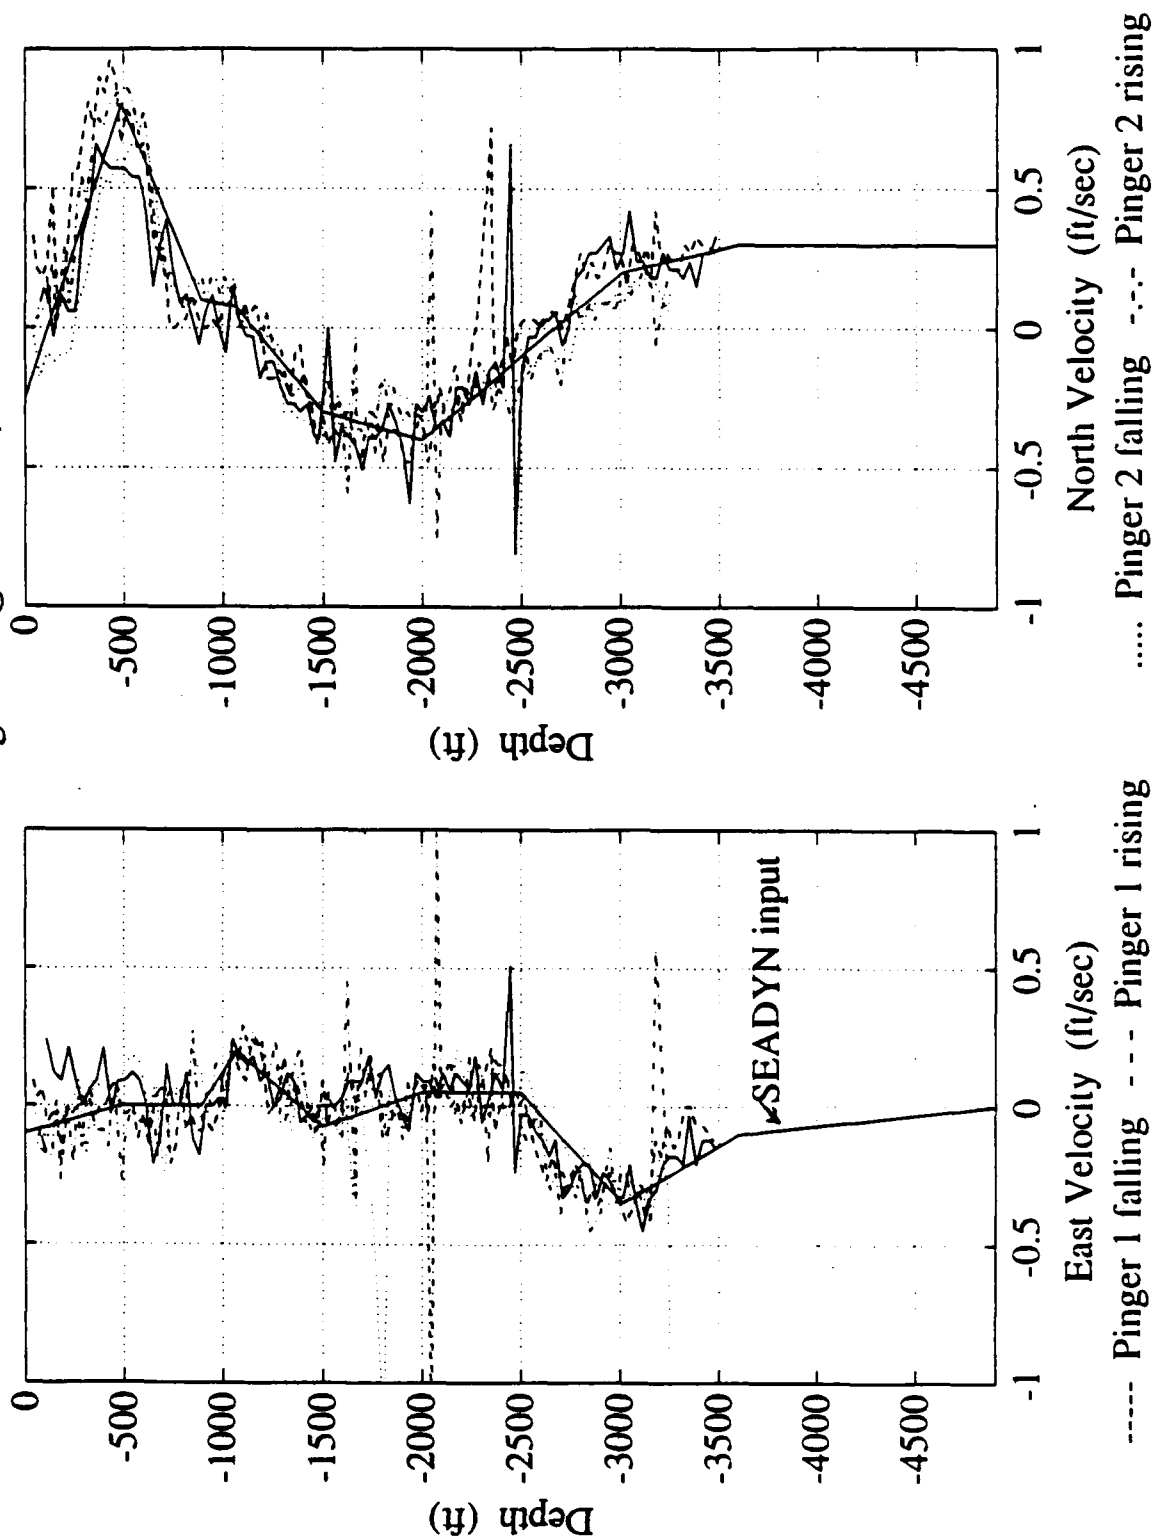


Figure A-1. AUTEC sea trials current profile - Run 6 90-degree turn at 1.5 knots w/MTU.

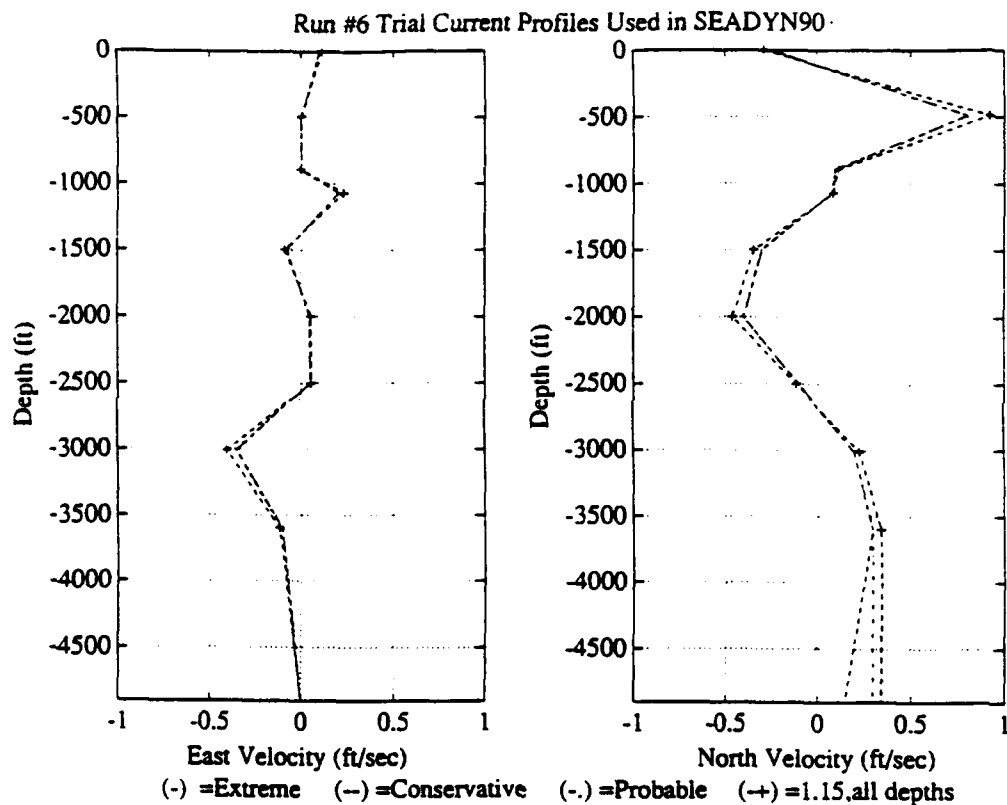


Figure A-2. Run 6 trial current profiles used in SEADYN90.

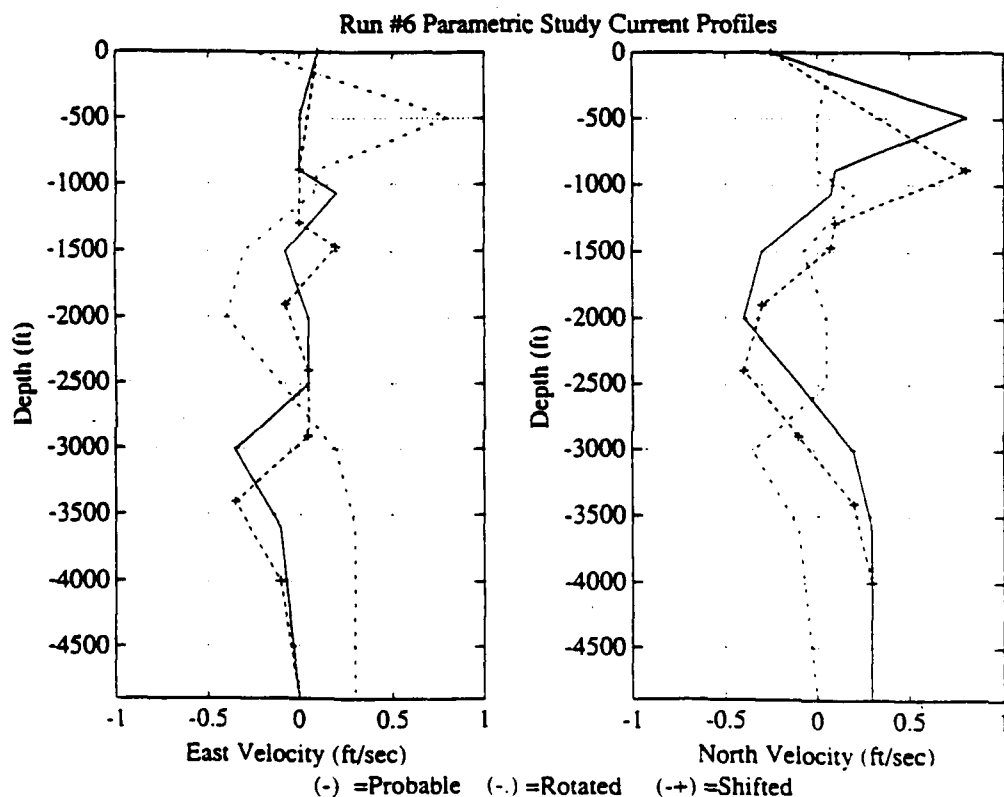


Figure A-3. Run 6 parametric study current profiles.

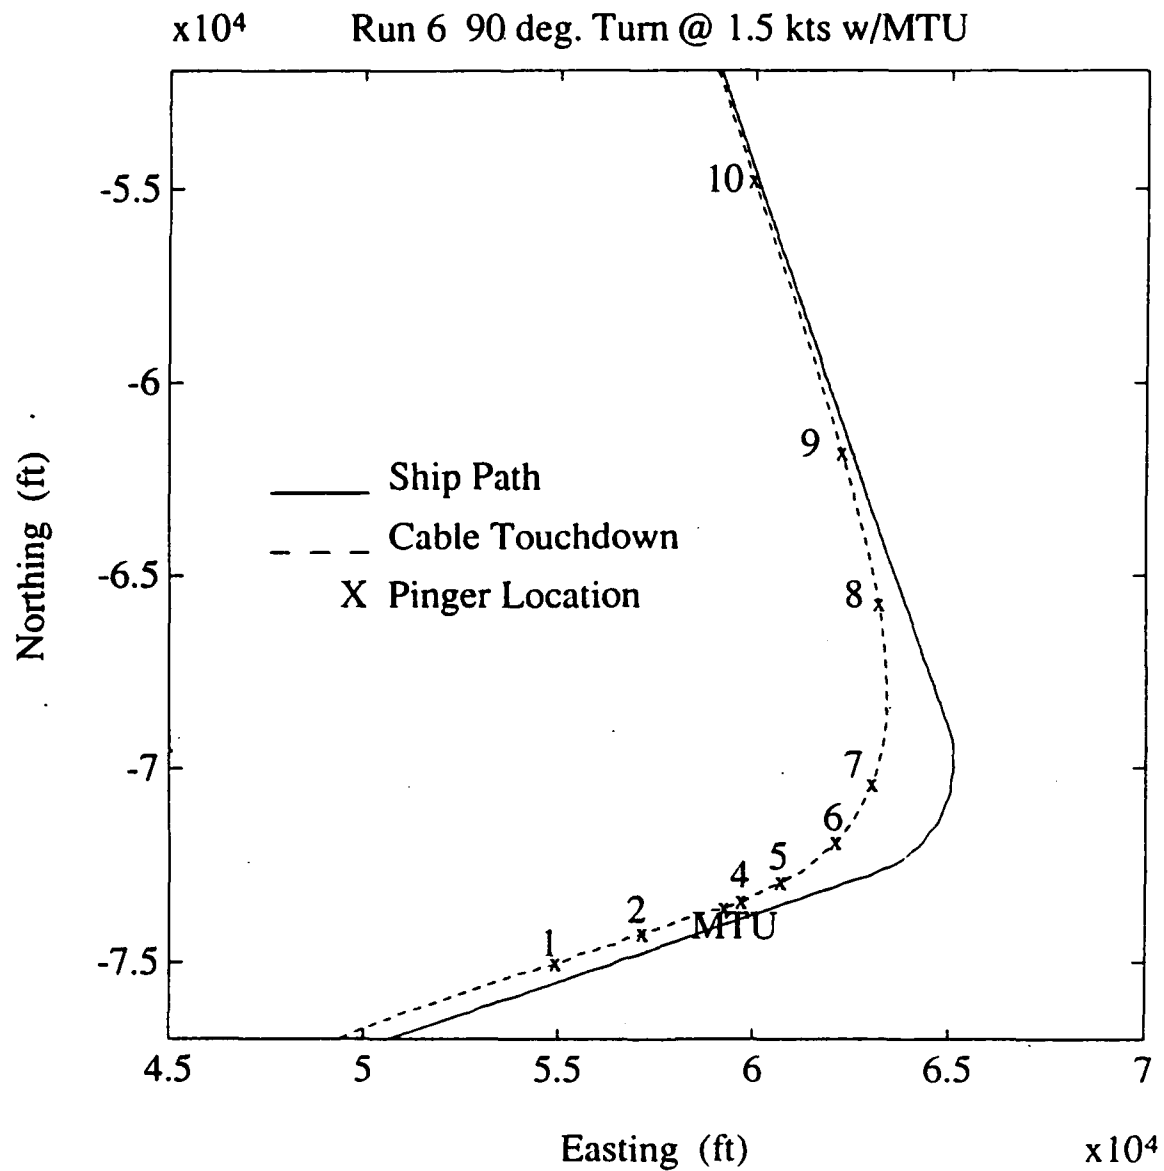


Figure A-4. Run 6 90-degree turn at 1.5 knots w/MTU.

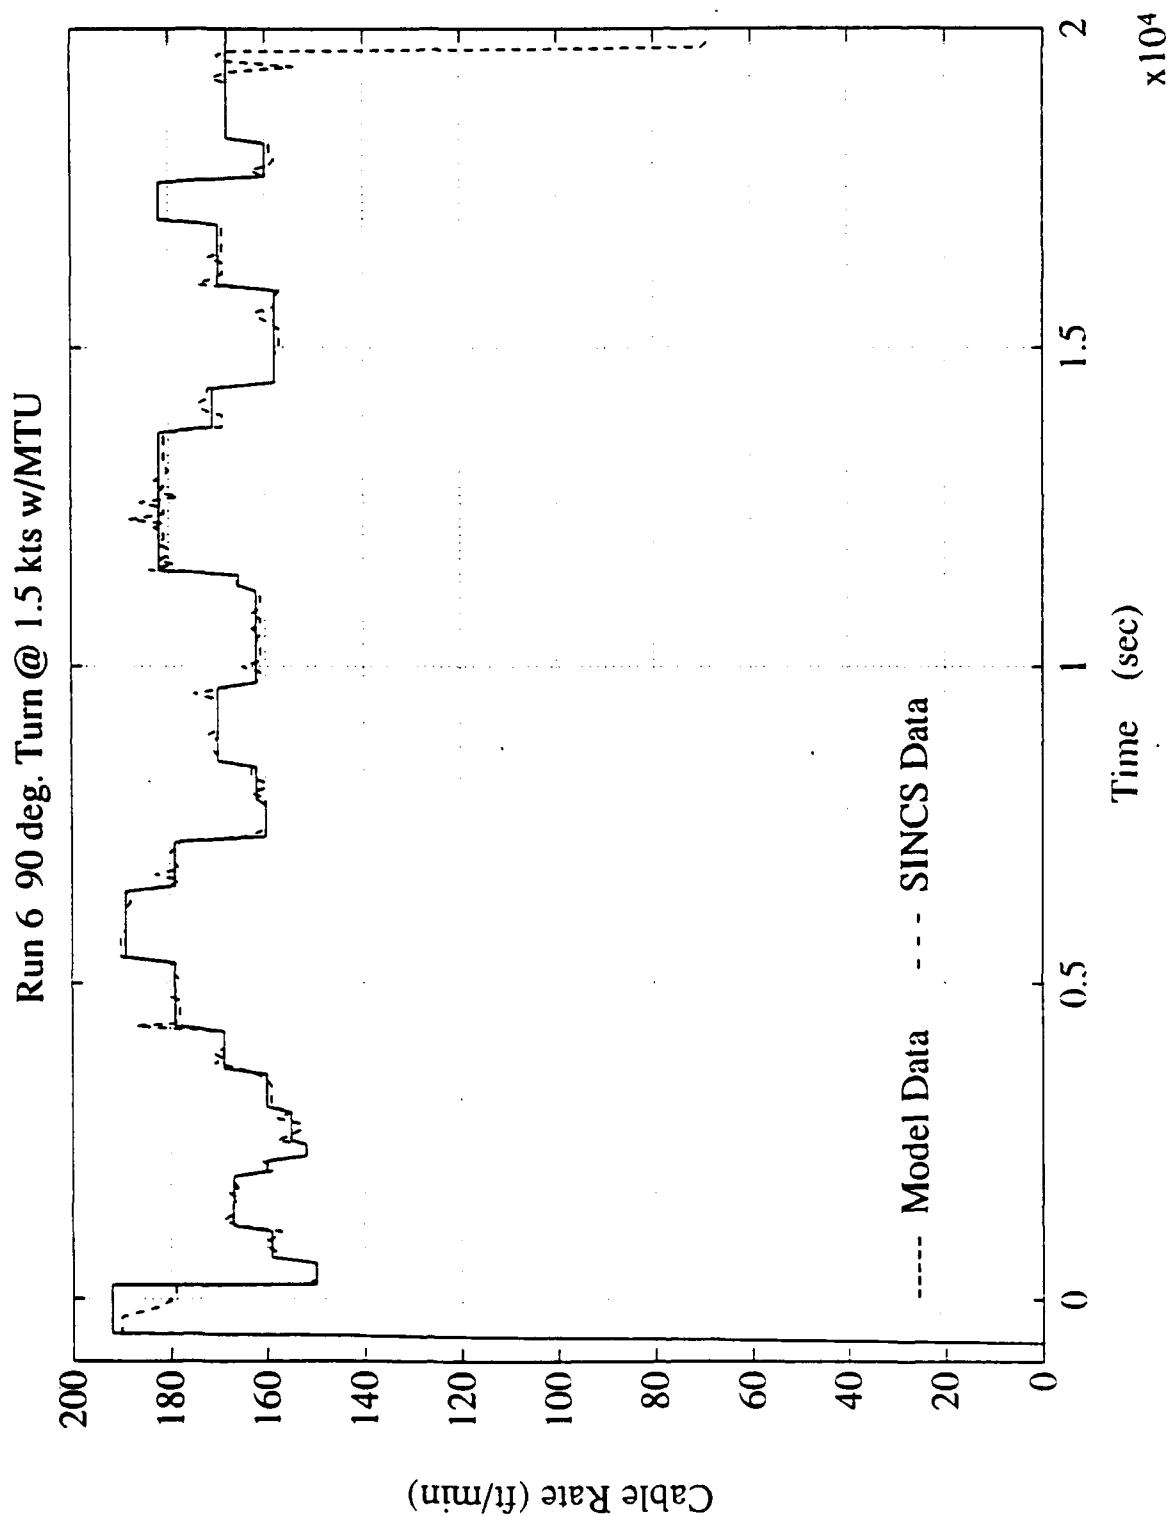


Figure A-5. Run 6 90-degree turn at 1.5 knots w/MTU.



## Appendix B

### SEADYN90 - SOAR COMPARISONS

This appendix graphically illustrates the quality of the results achieved by SEADYN90 for three of the SOAR experiments. Figure B-1 is a large-scale overview of nine of the measured and simulated cable trajectories superimposed on the (dotted) barge track. Figures B-2 through B-12 are the "best" comparisons for Run 6 using the probable current and the doubled normal drag coefficient (2.54). To assist in the inspection of these graphs, each of the cable trajectories is subjectively marked at three critical locations where the SOAR and SEADYN90 cable trajectories significantly alter course. Note that the measured pinger trajectories vary significantly, even for adjacent pingers.

There is a slight offset in surface locations between the SEADYN and SOAR data. This is due to the fact that the position of the simulated pinger was in some cases up to 150 feet away from the actual pinger location along the cable due to the required discretization of element lengths. Also, the SOAR pingers were pressure activated so no data was obtained until the pinger was 30 to 100 feet into the water column.

Figures B-13 through B-16 illustrate the cable trajectory comparisons for Run 2 and 7. These further illustrate that the normal drag coefficient of 2.54 is an accurate constant for these conditions and SEADYN90 is competent at simulating the SOAR conditions.

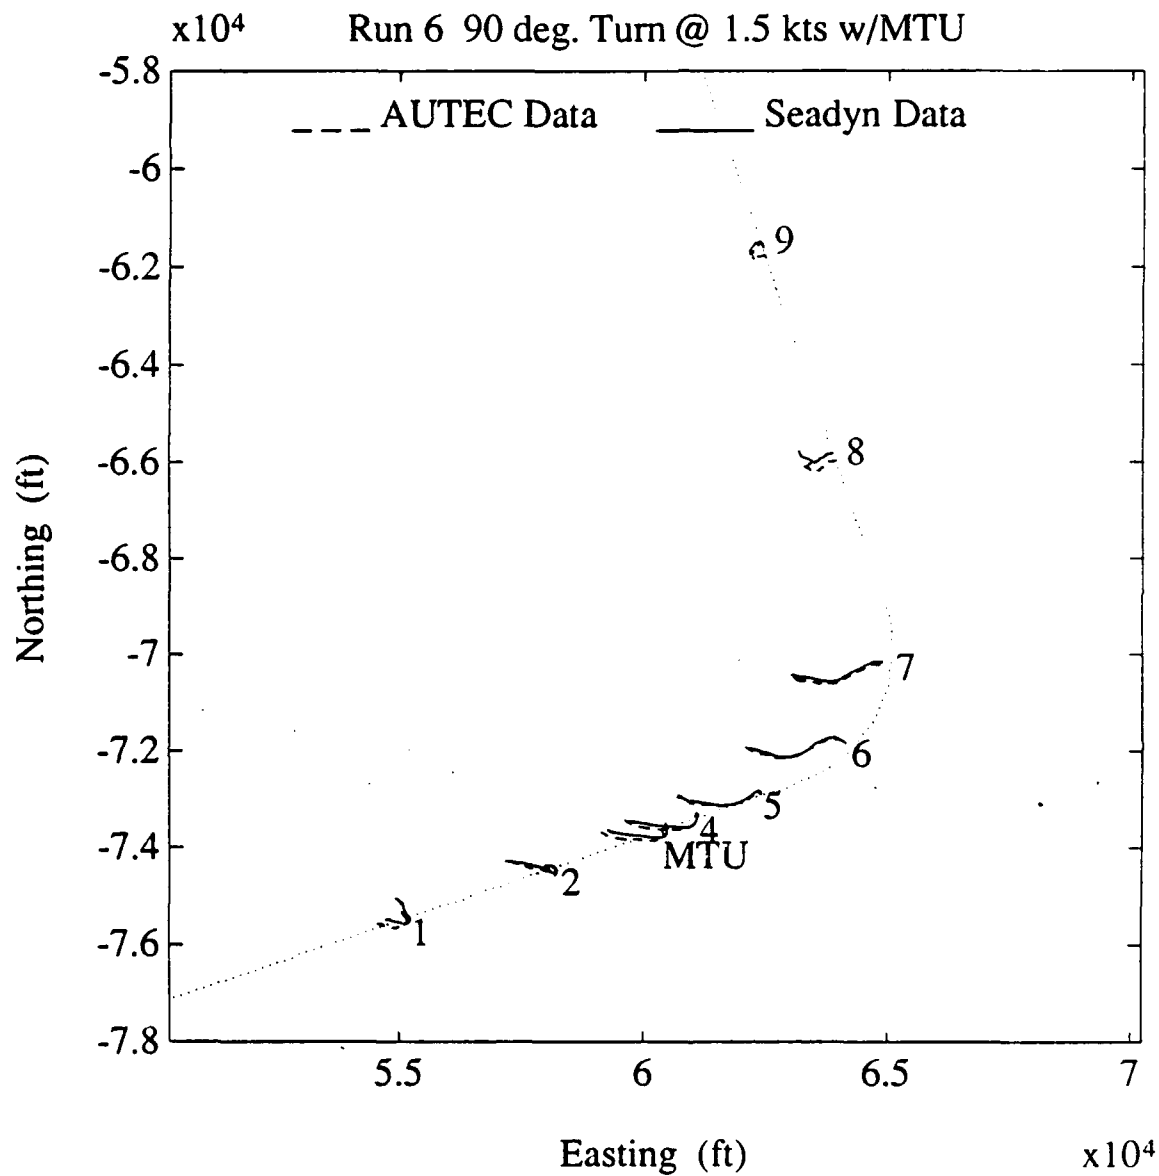


Figure B-1. Run 6 90-degree turn at 1.5 knots w/MTU.

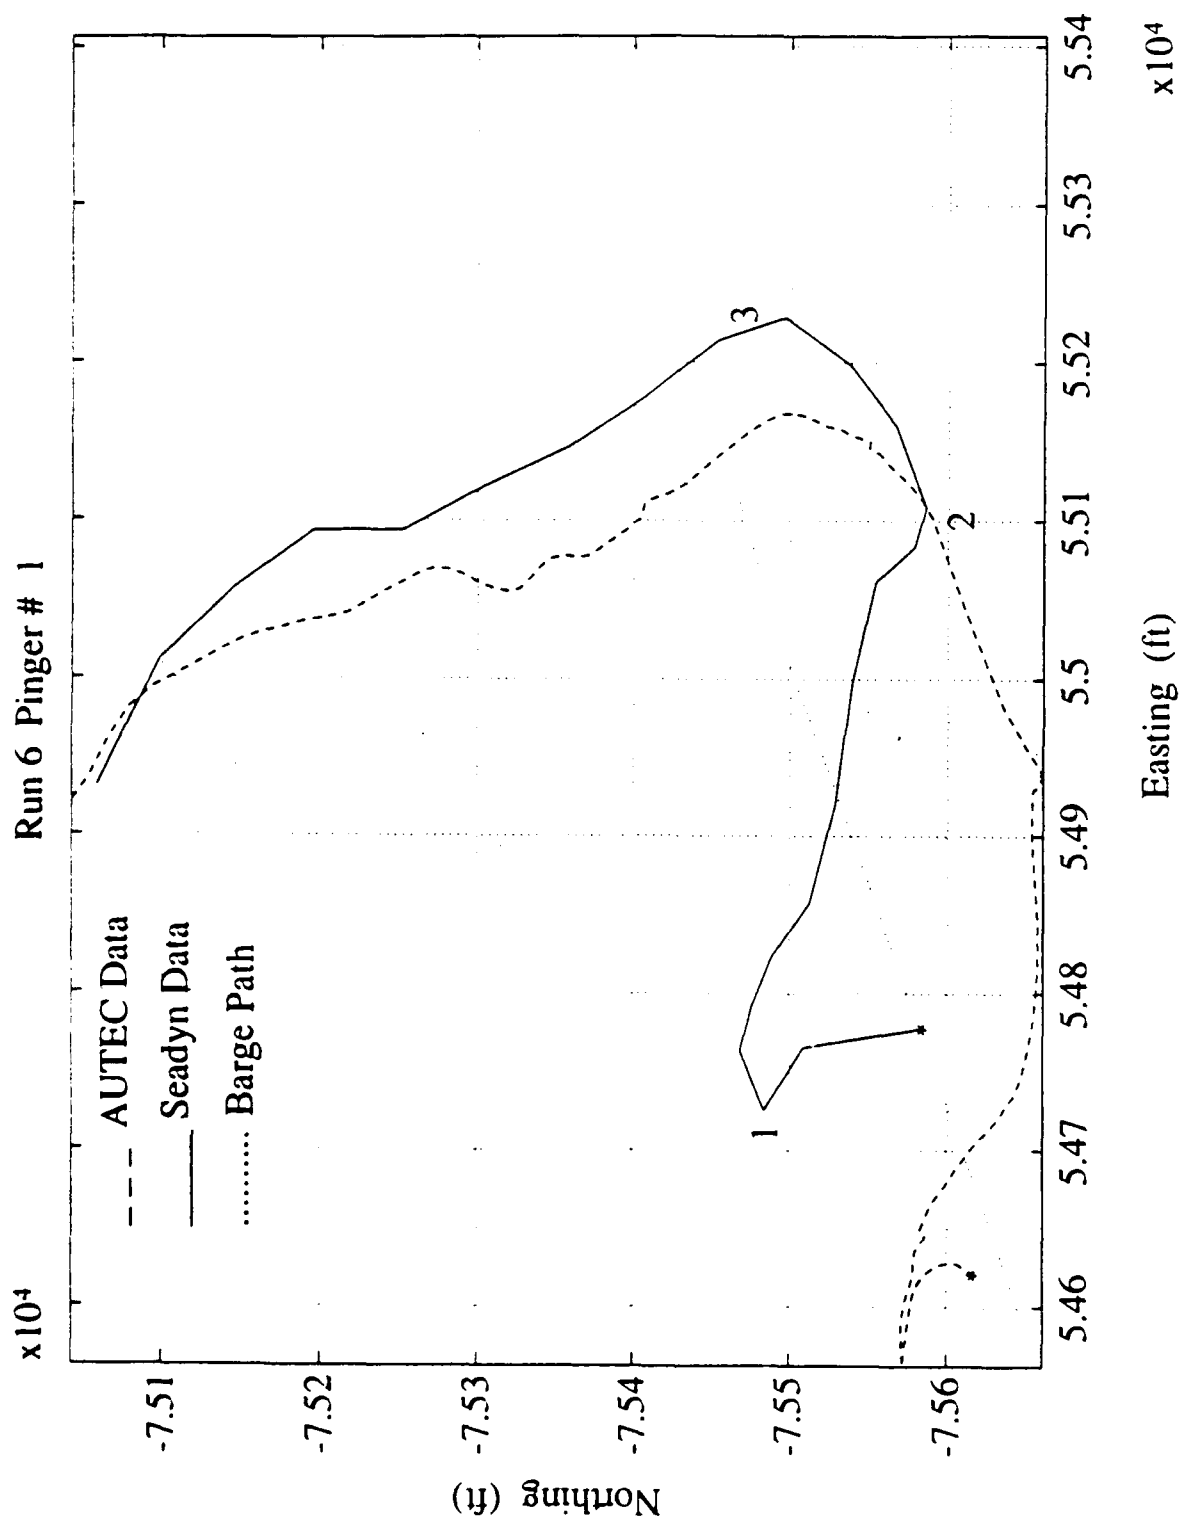


Figure B-2. Run 6 pinger #1.

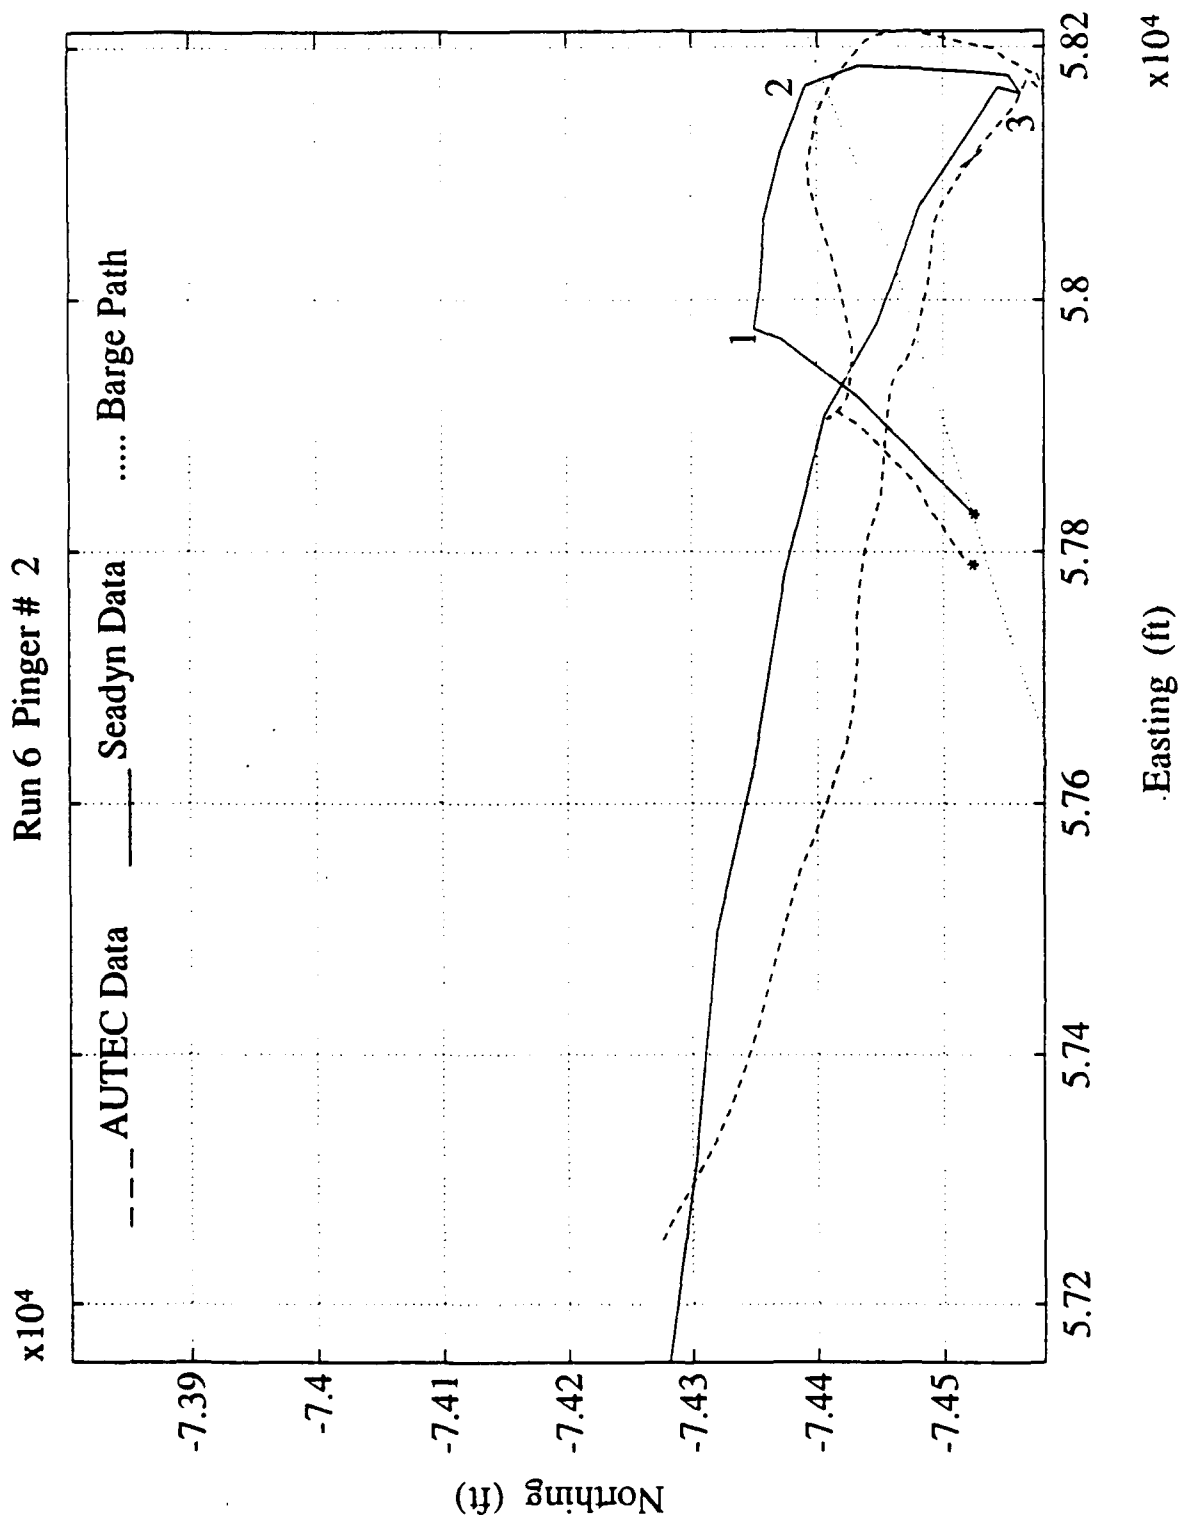


Figure B-3. Run 6 pinger #2.


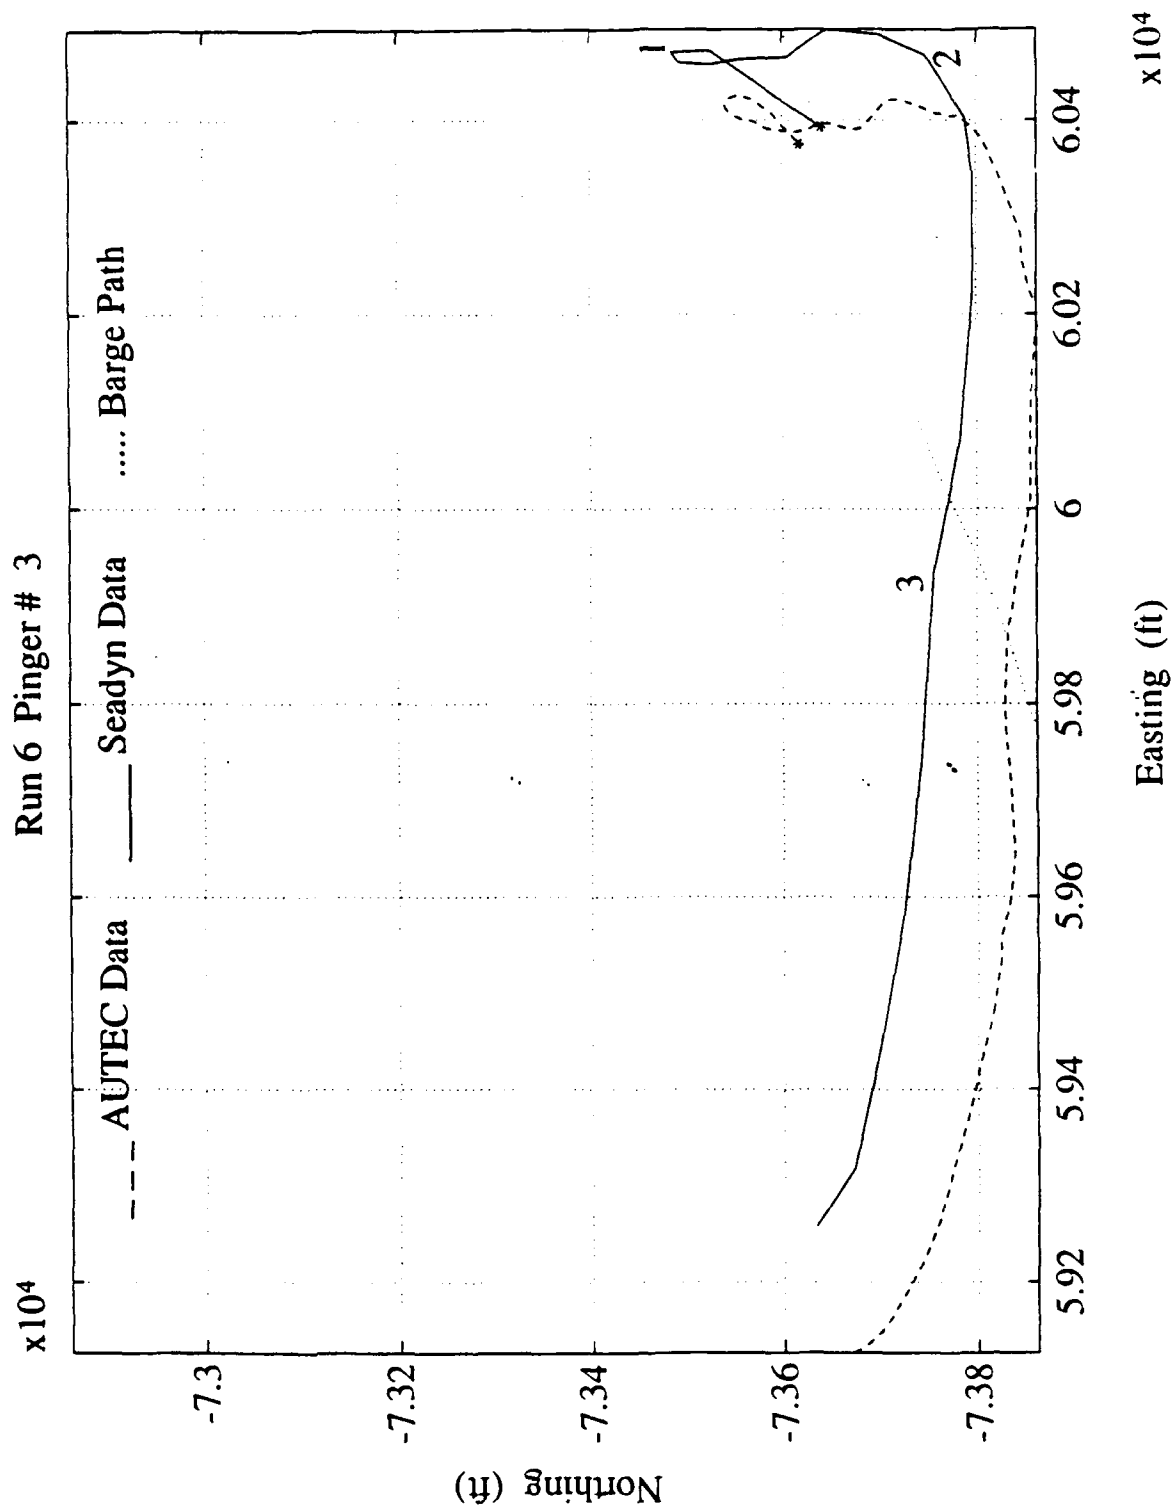


Figure B-4. Run 6 pinger #3.

# Run 6 Pinger # 4

x10<sup>4</sup>

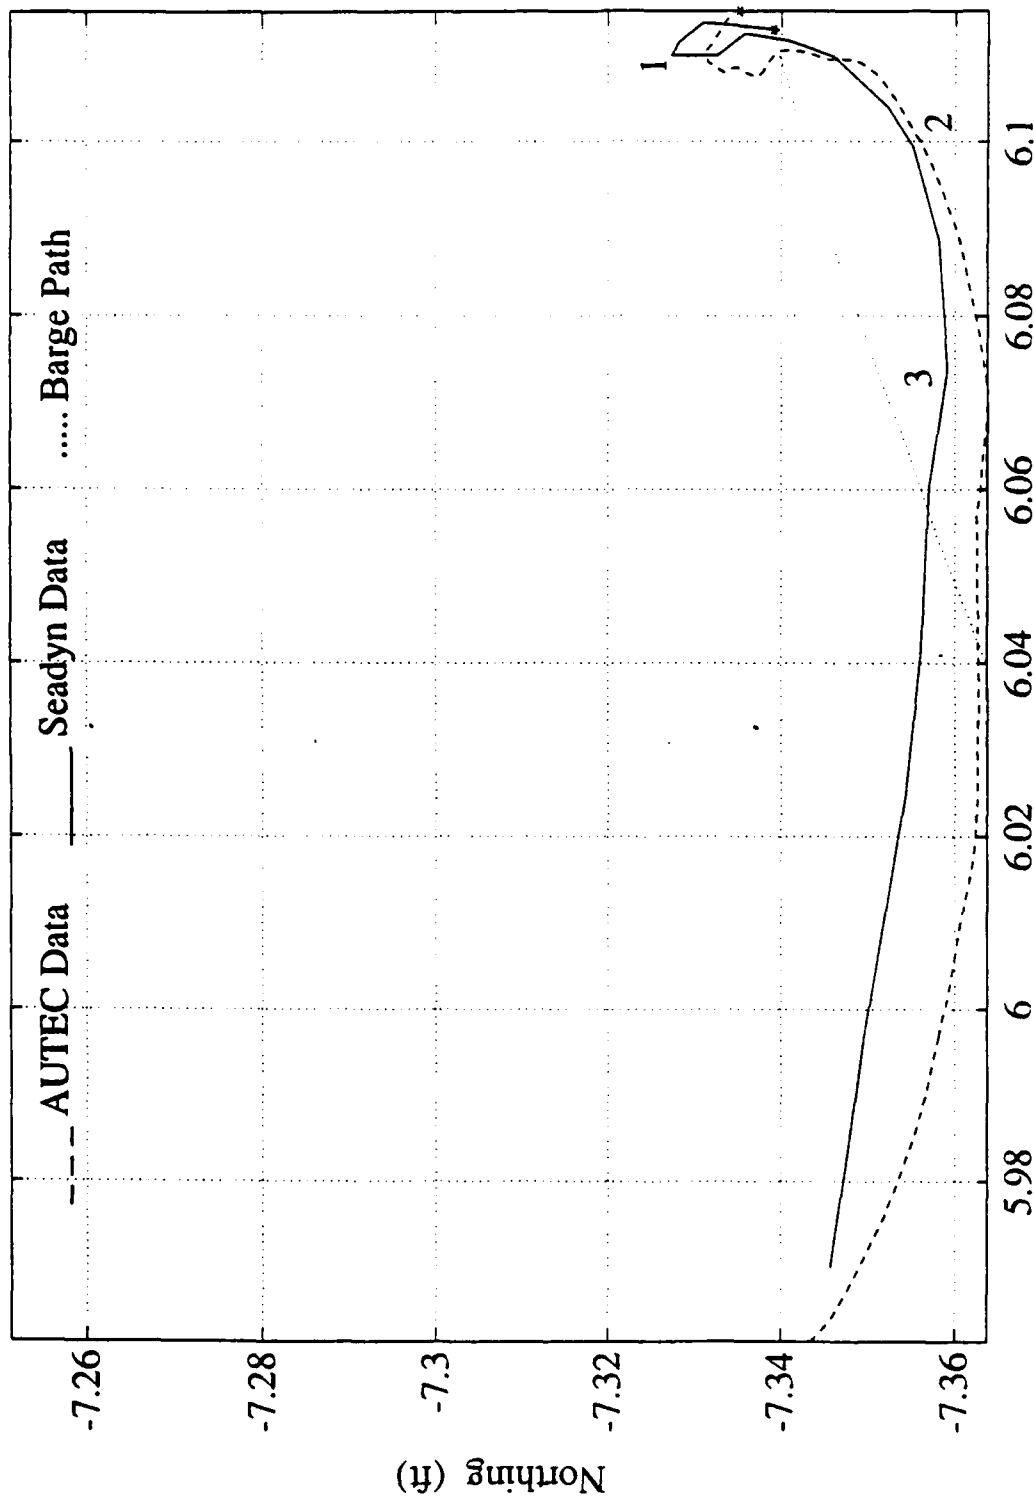

Easting (ft)

x10<sup>4</sup>

Figure B-5. Run 6 pinger #4.

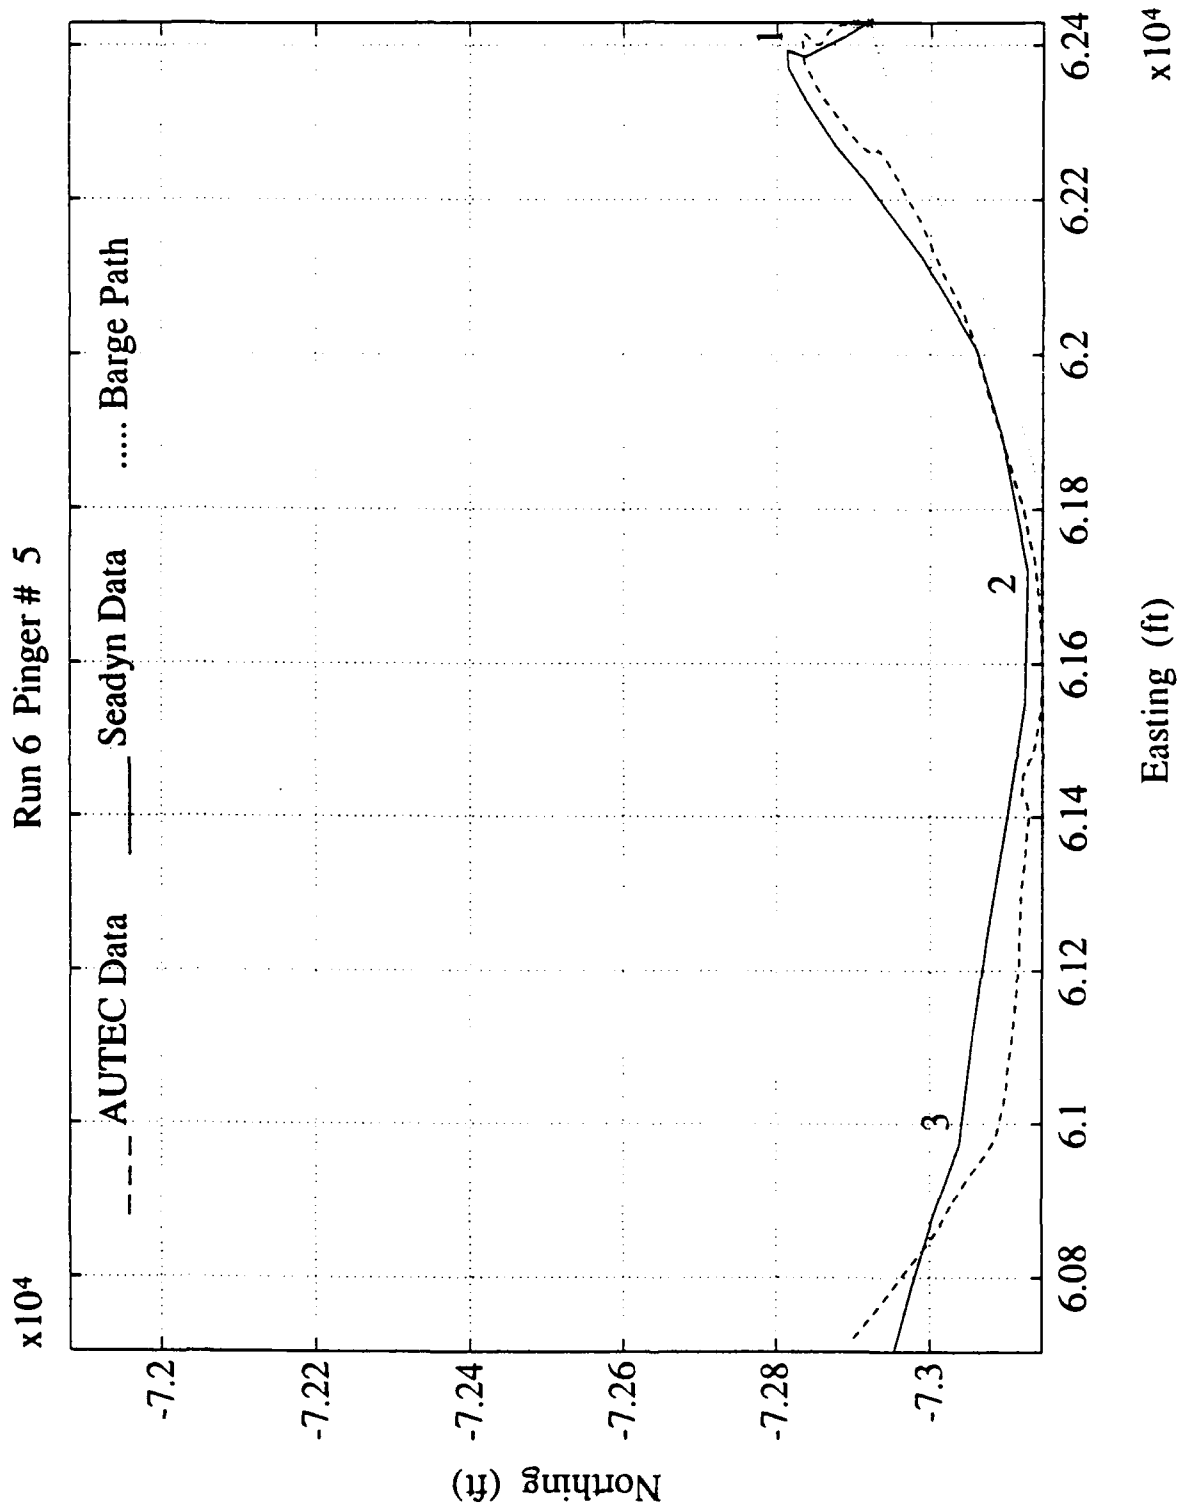


Figure B-6. Run 6 pinger #5.

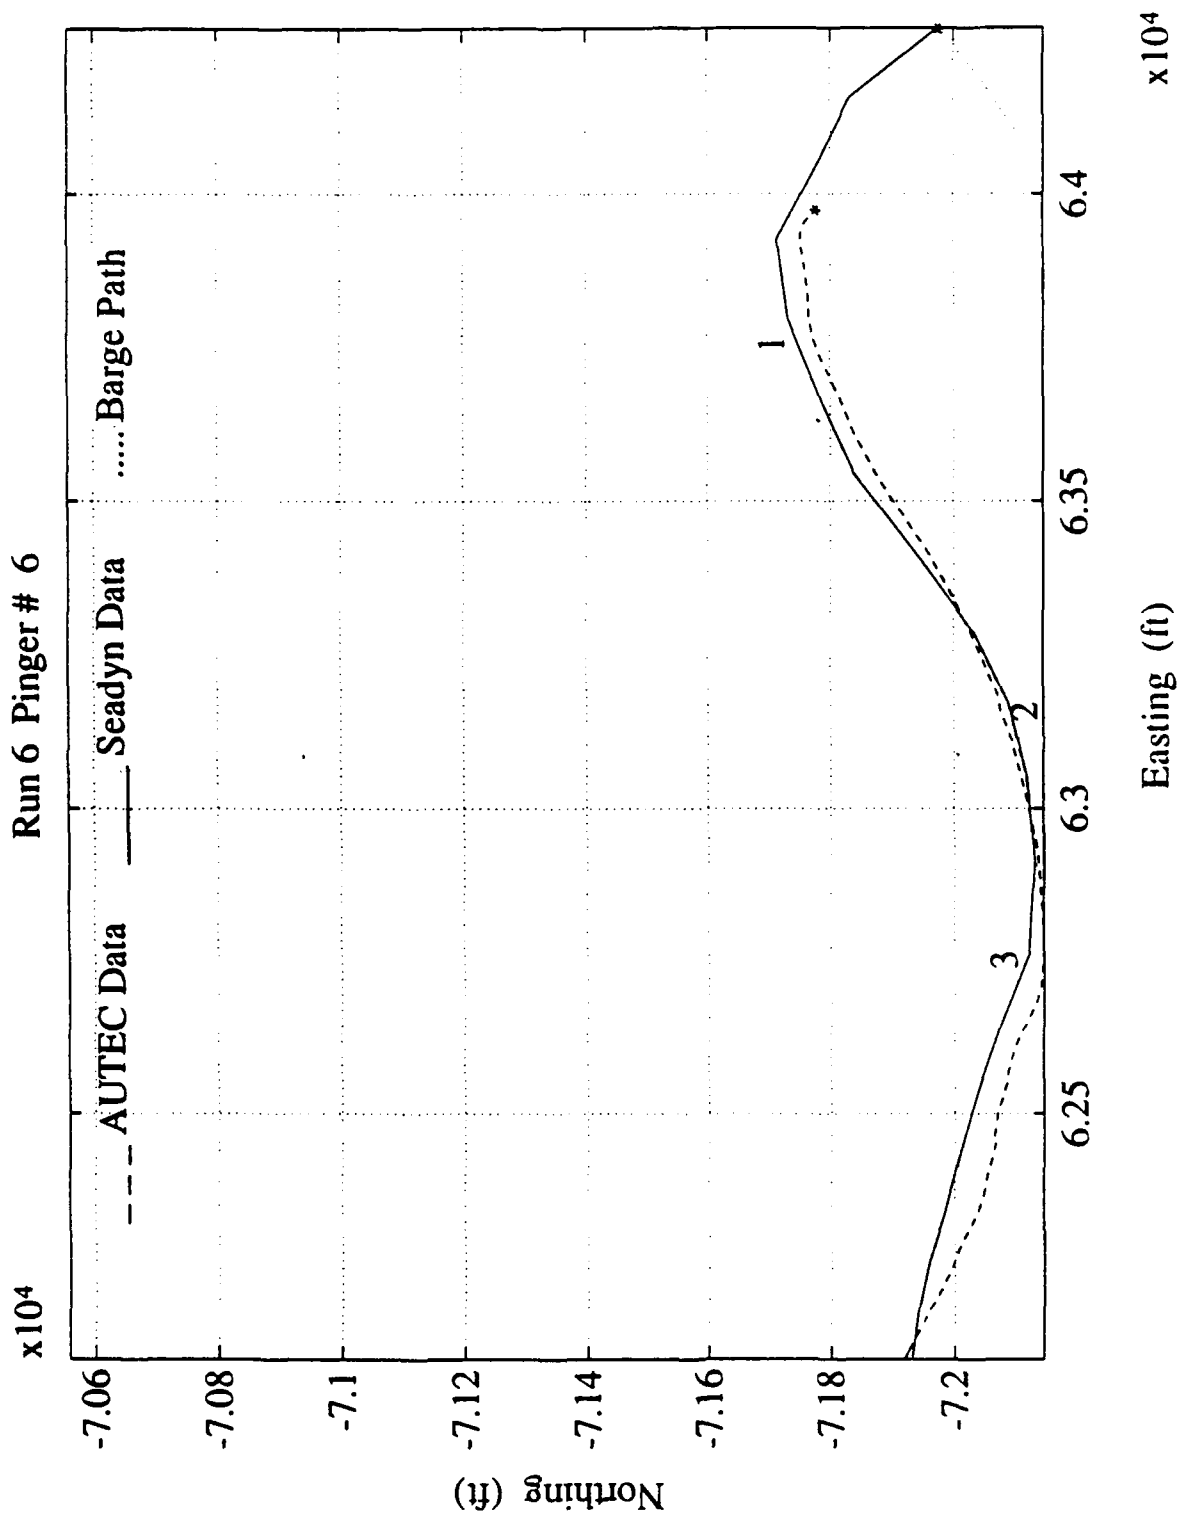


Figure B-7. Run 6 pinger #6.



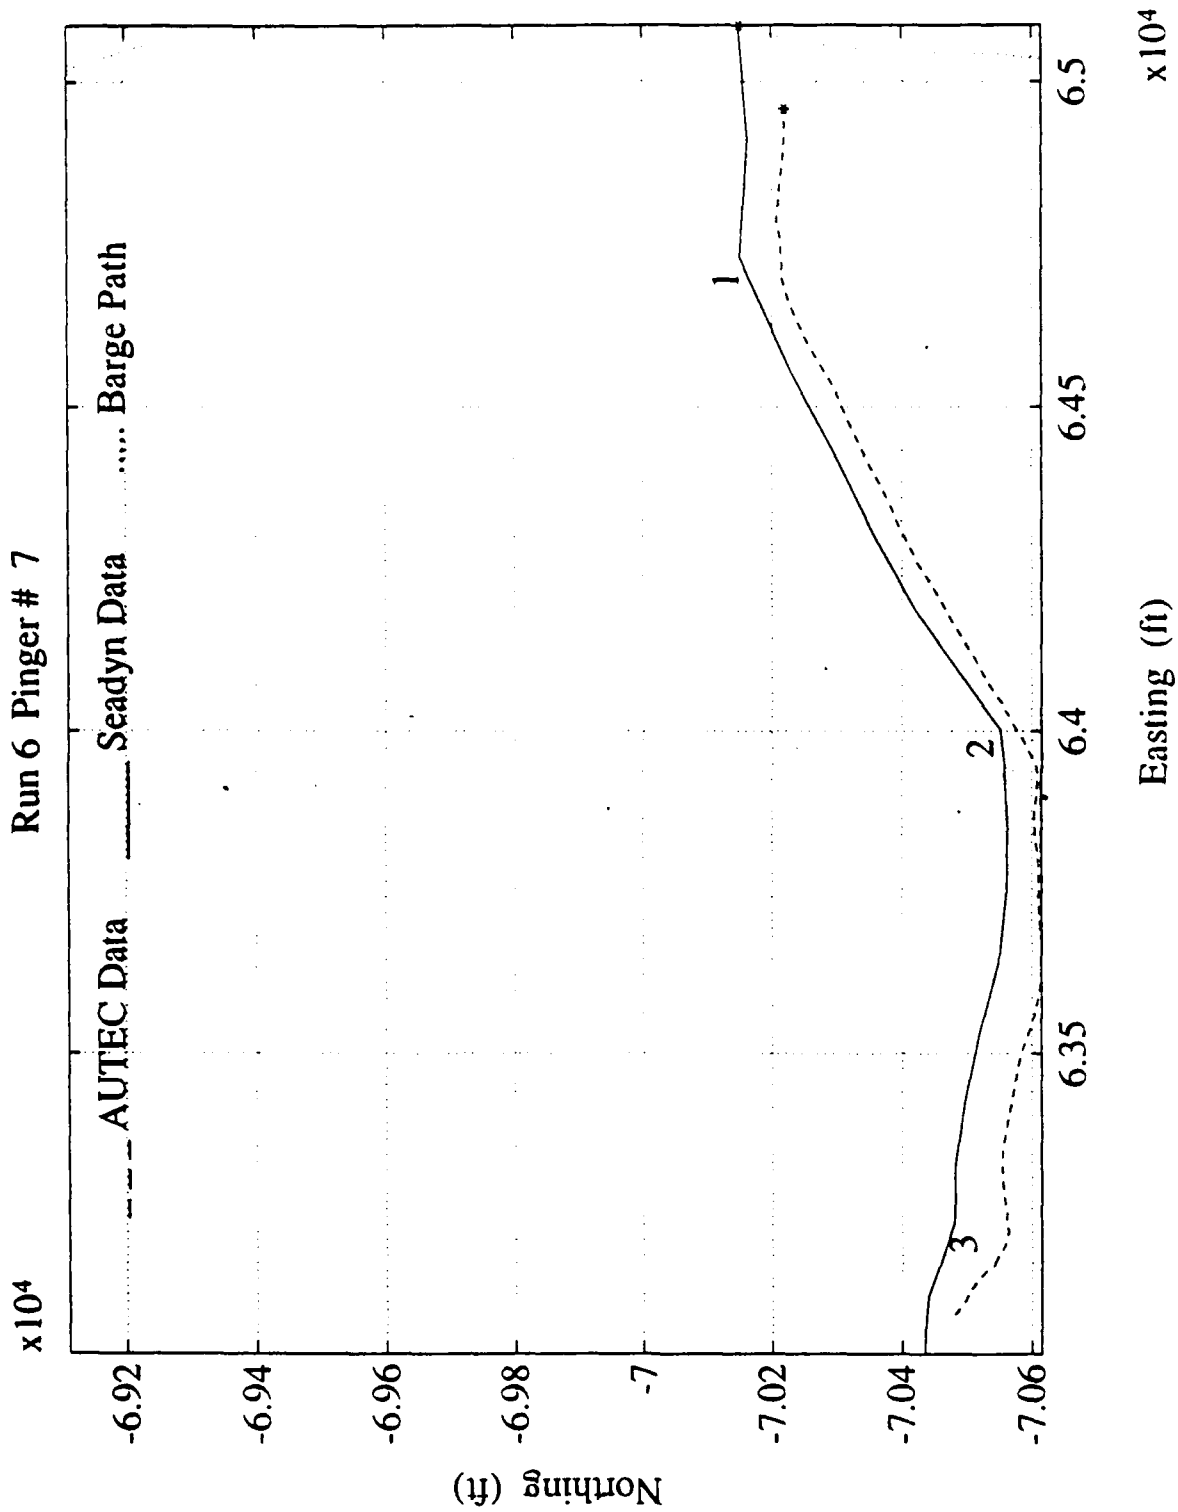


Figure B-8. Run 6 pinger #7.

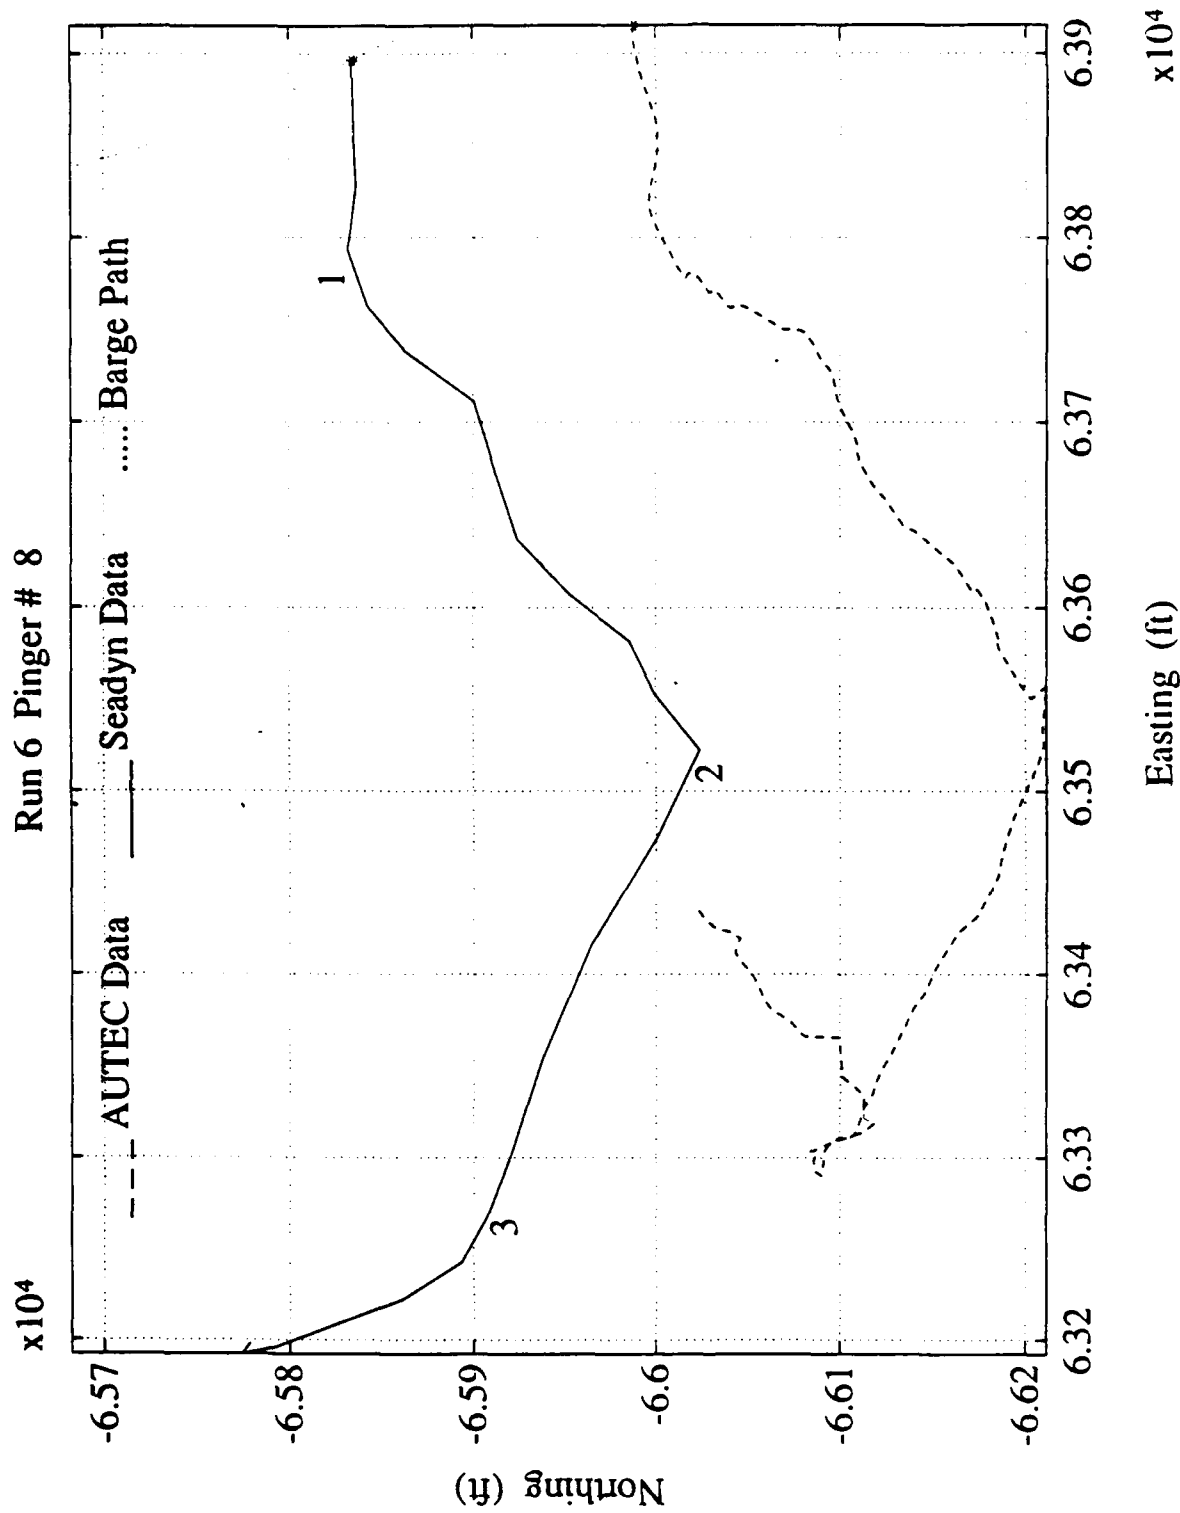


Figure B-9. Run 6 pinger #8.

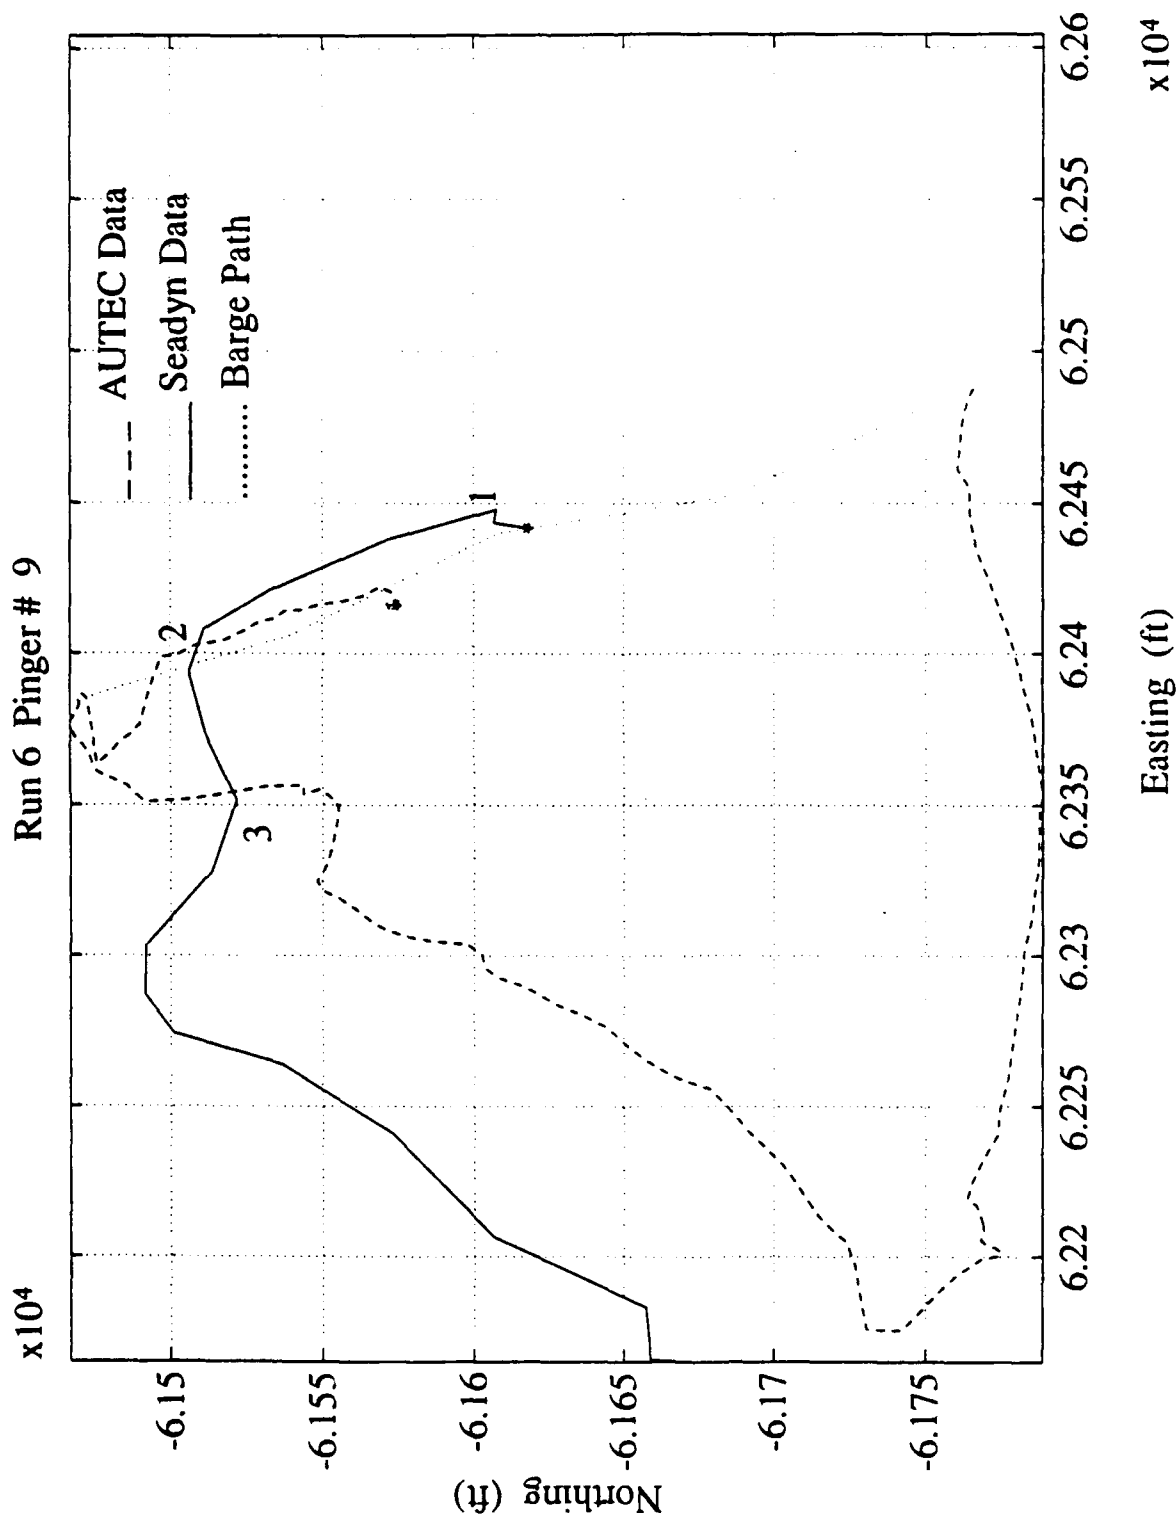


Figure B-10. Run 6 pinger #9.

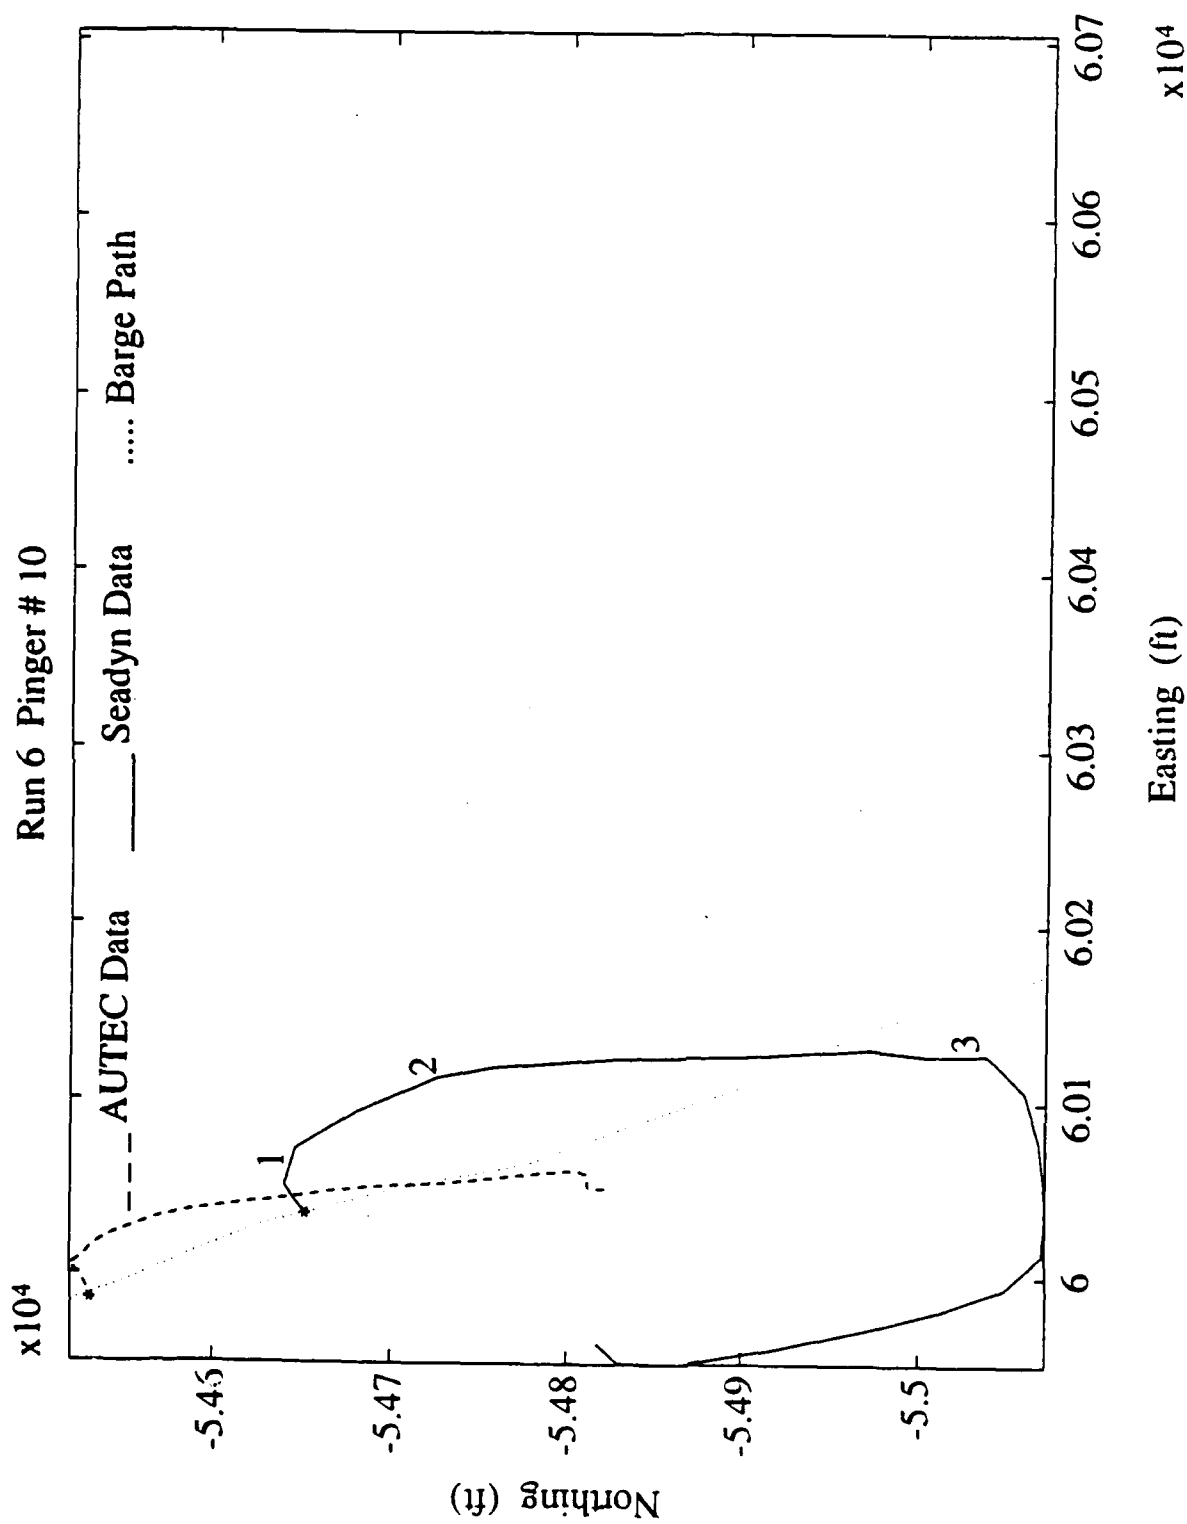


Figure B-11. Run 6 pinger #10.

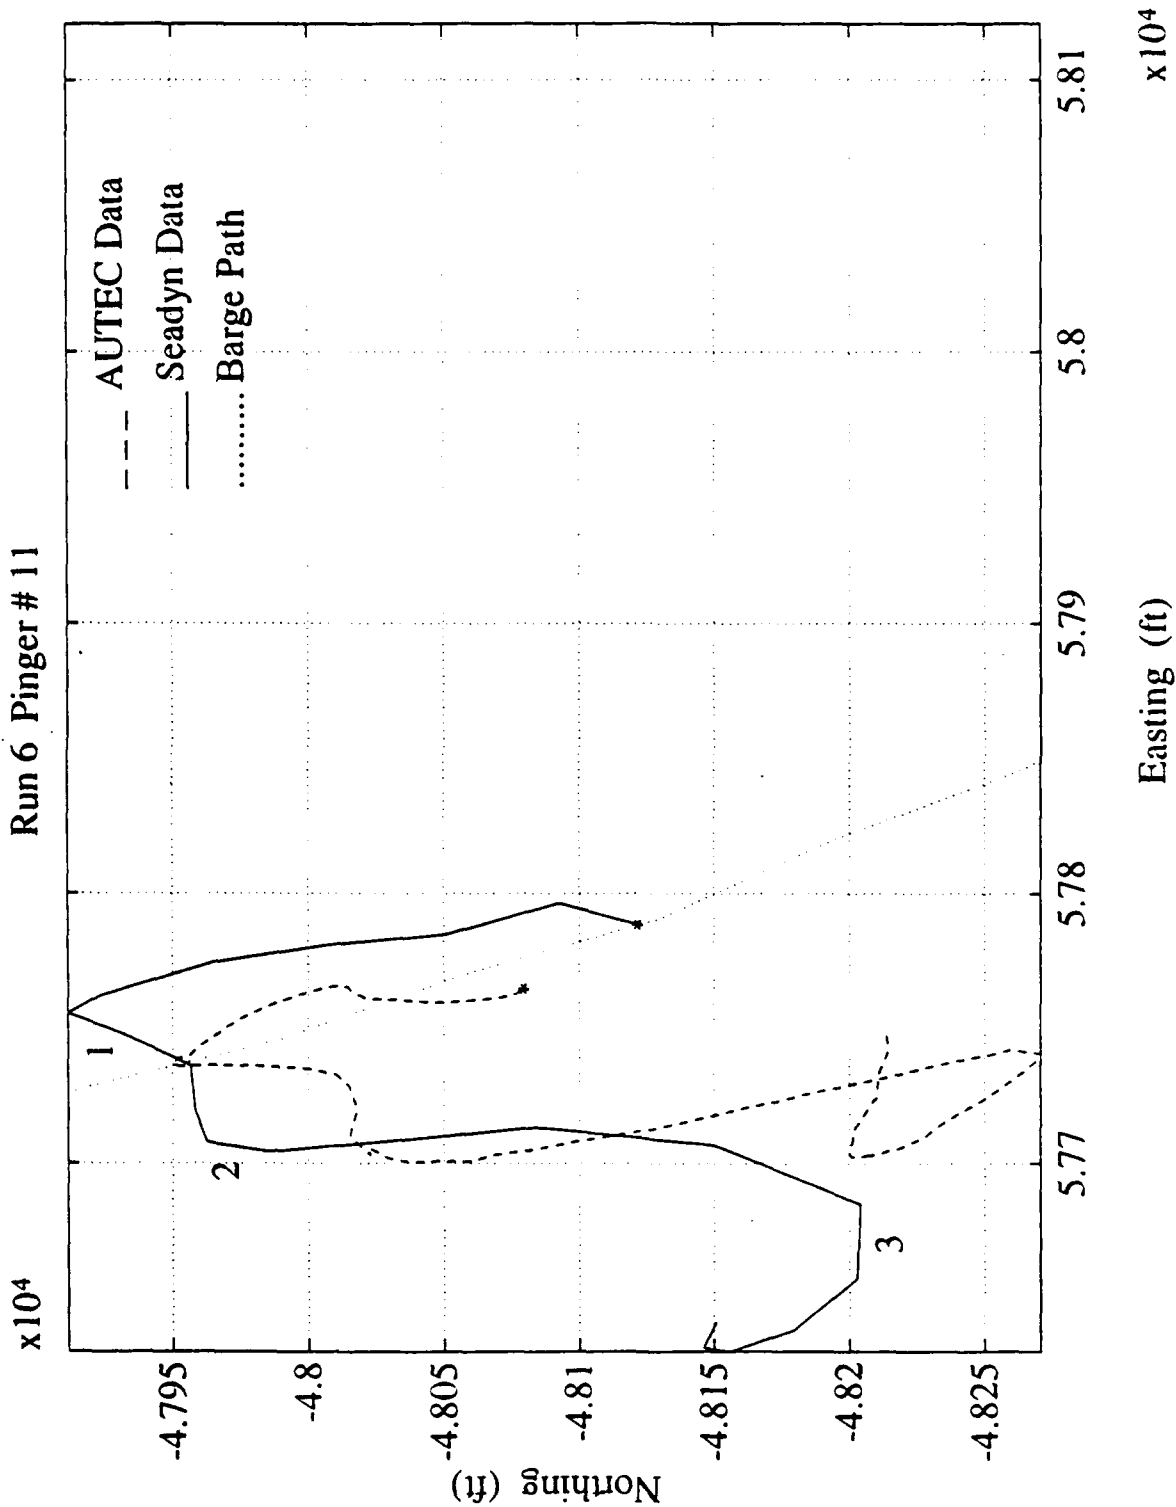


Figure B-12. Run 6 pinger #11.

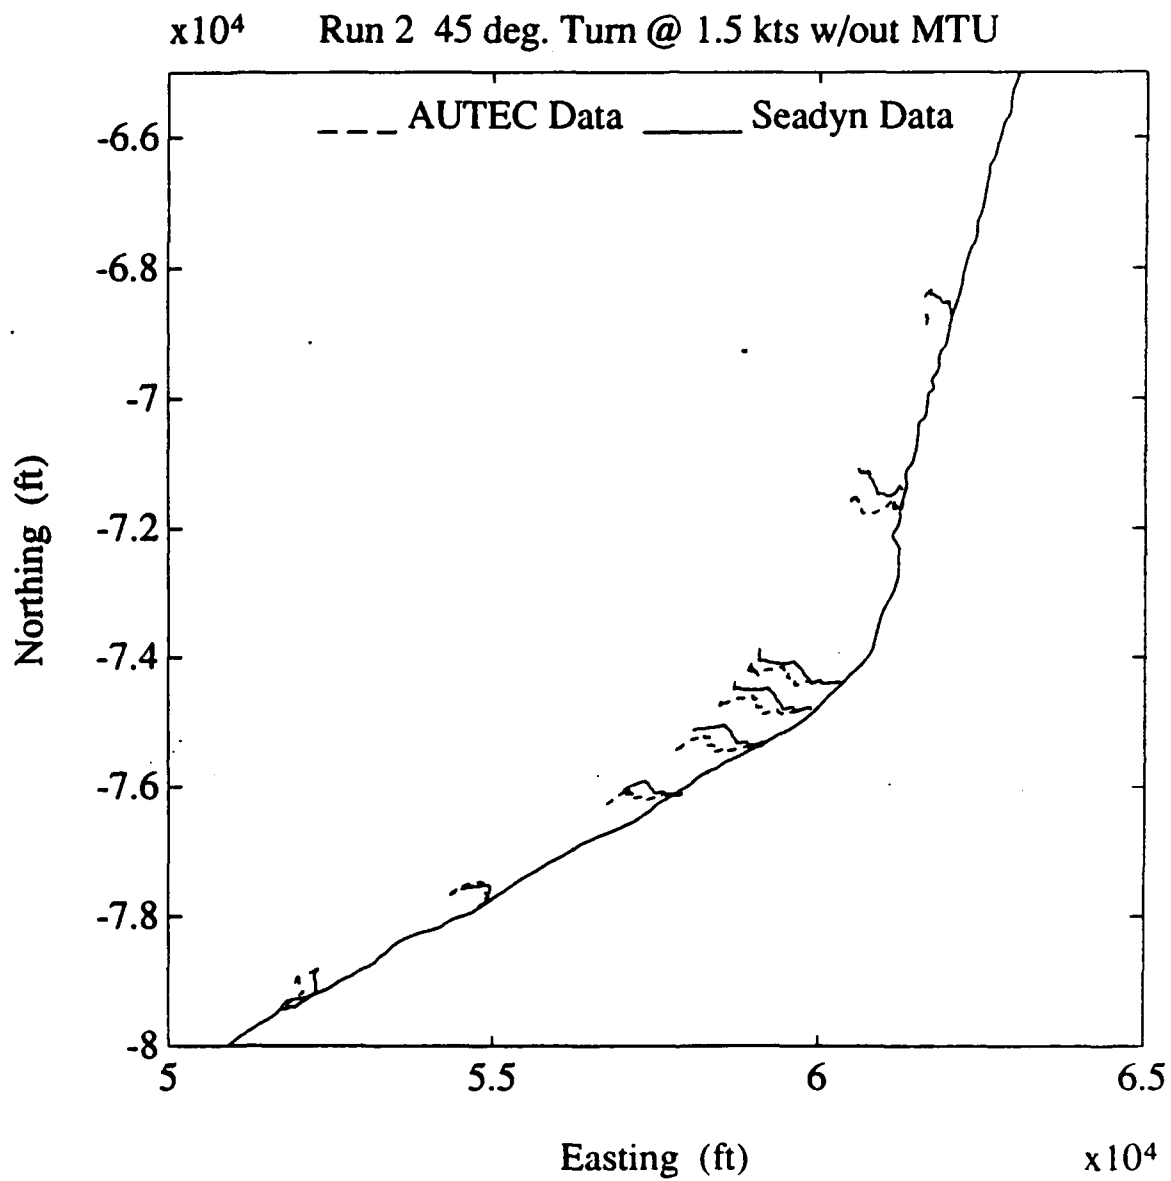


Figure B-13. Run 2 45-degree turn at 1.5 knots without MTU.

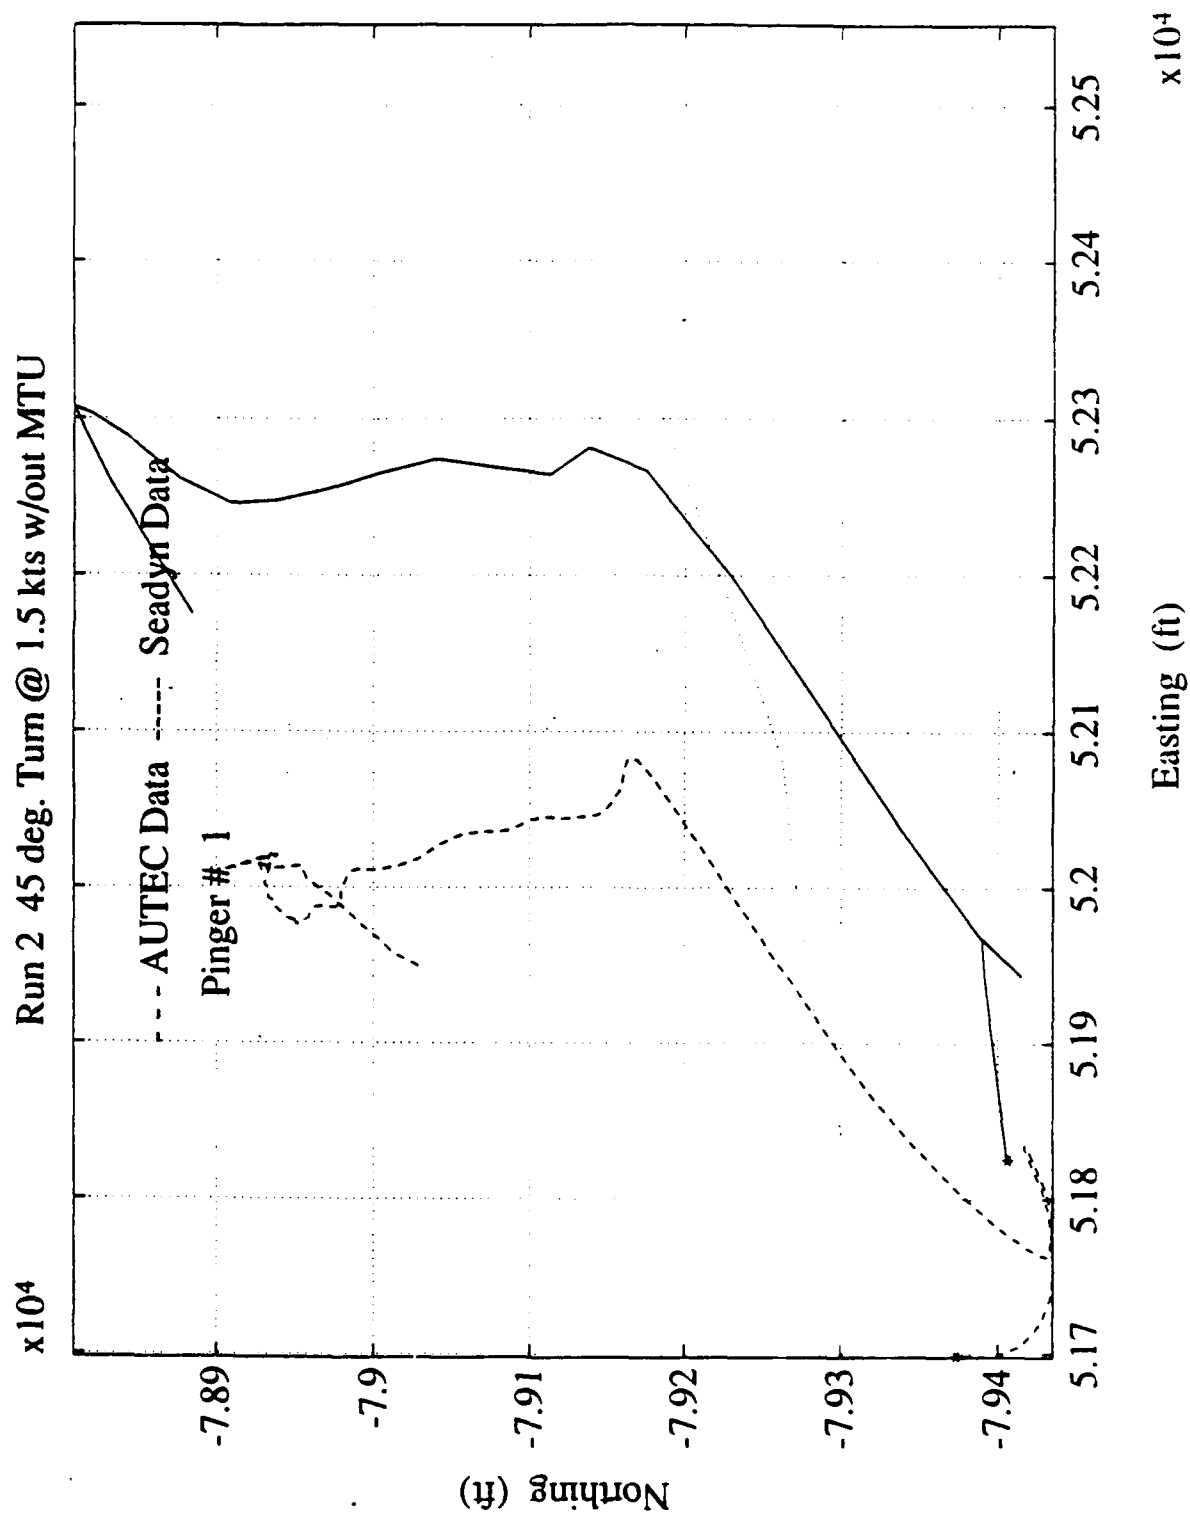


Figure B-14. Run 2 45-degree turn at 1.5 knots without MTU Surface Pinger #1.

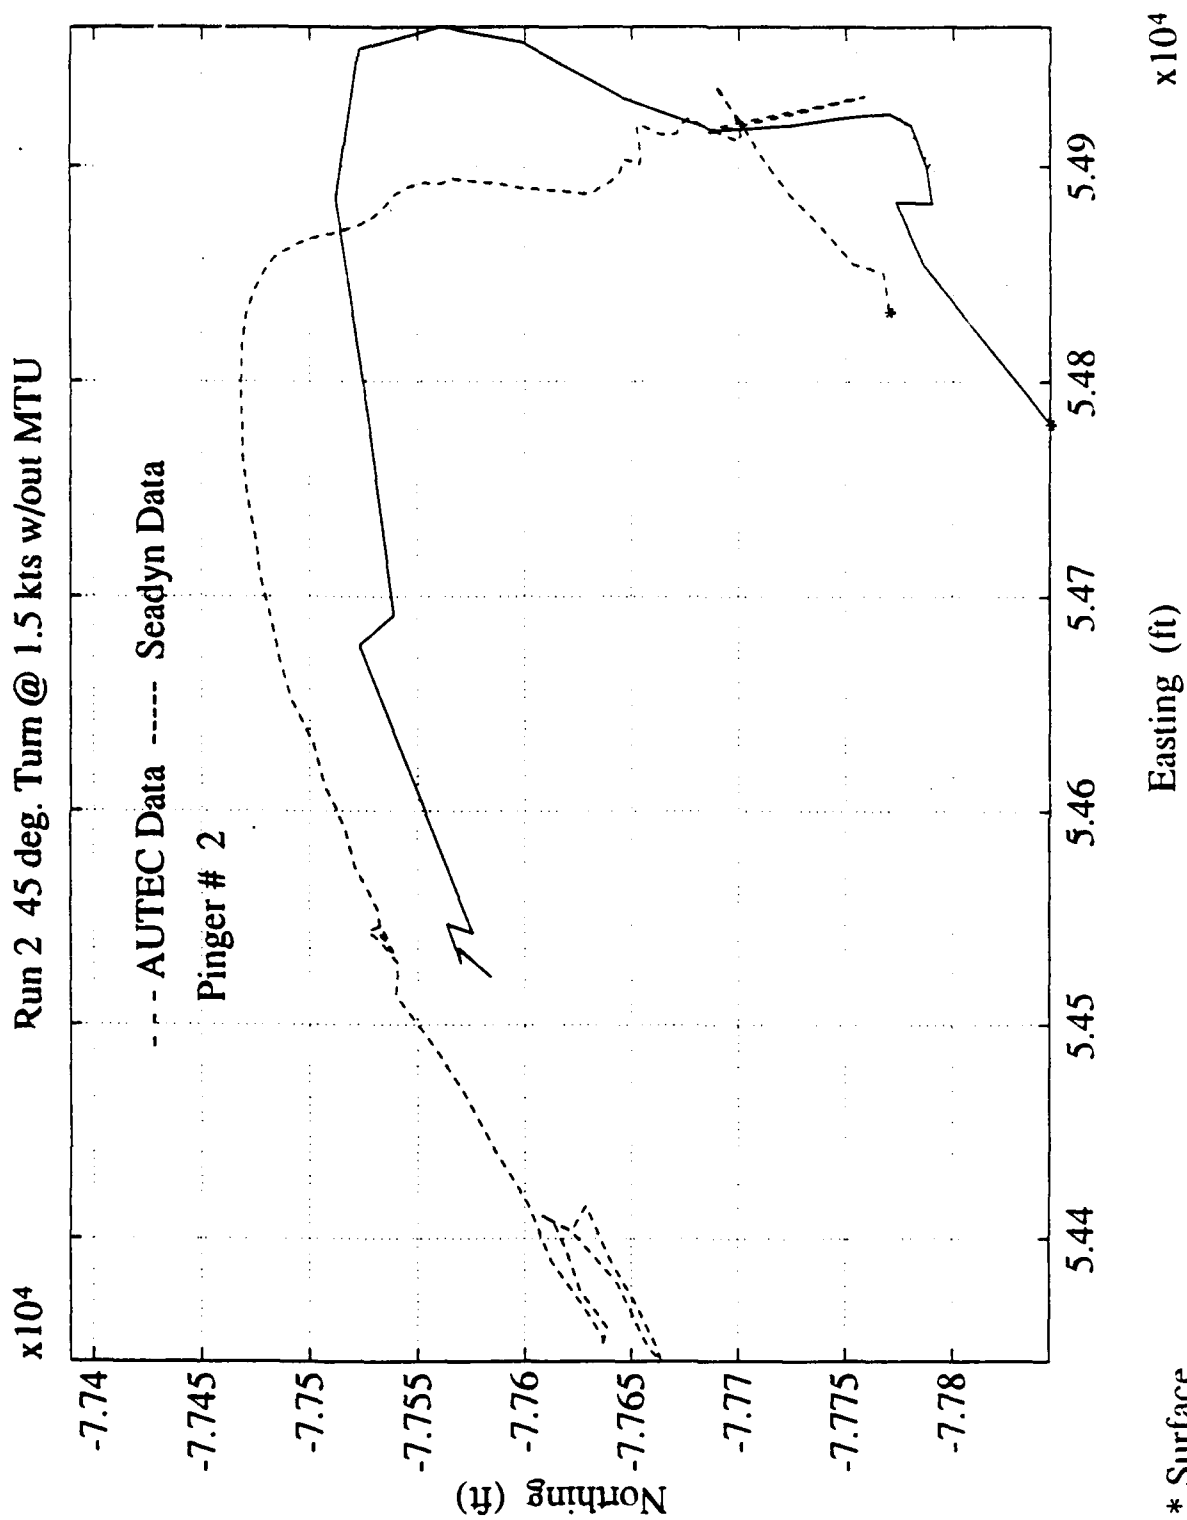


Figure B-15. Run 2 45-degree turn at 1.5 knots without MTU Surface Pinger #2.



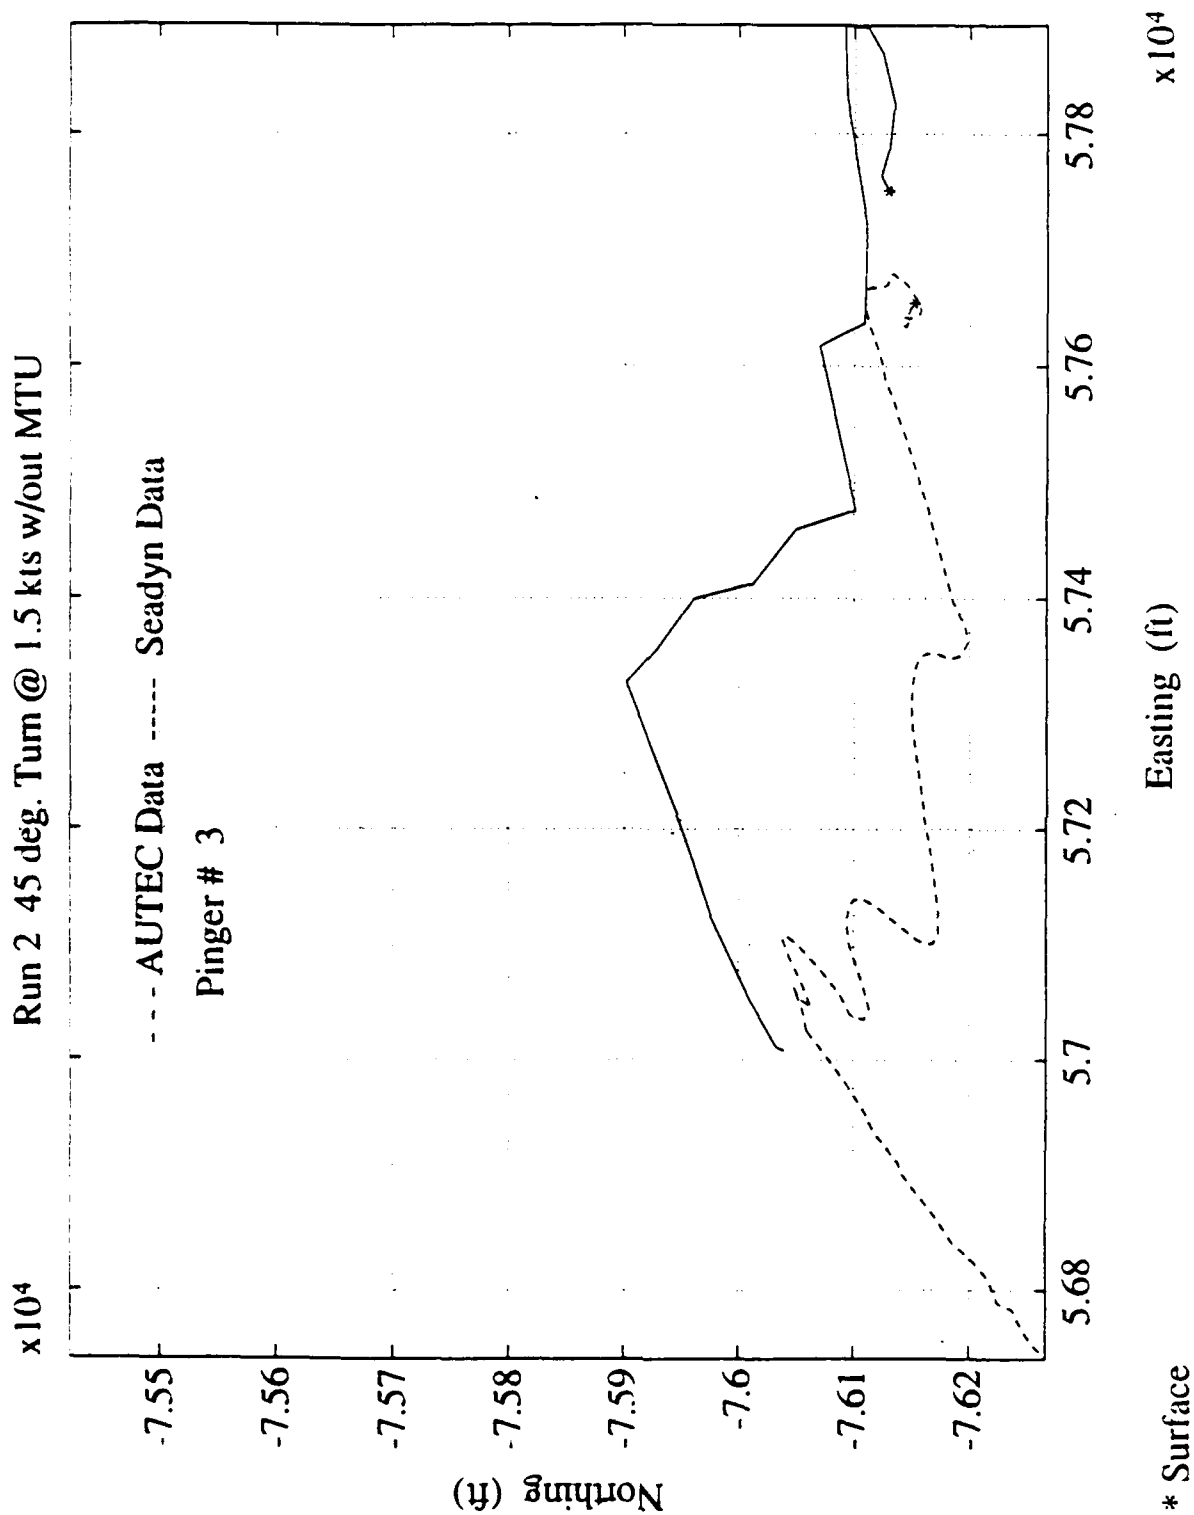


Figure B-16. Run 2 45-degree turn at 1.5 knots without MTU Surface Pinger #3.

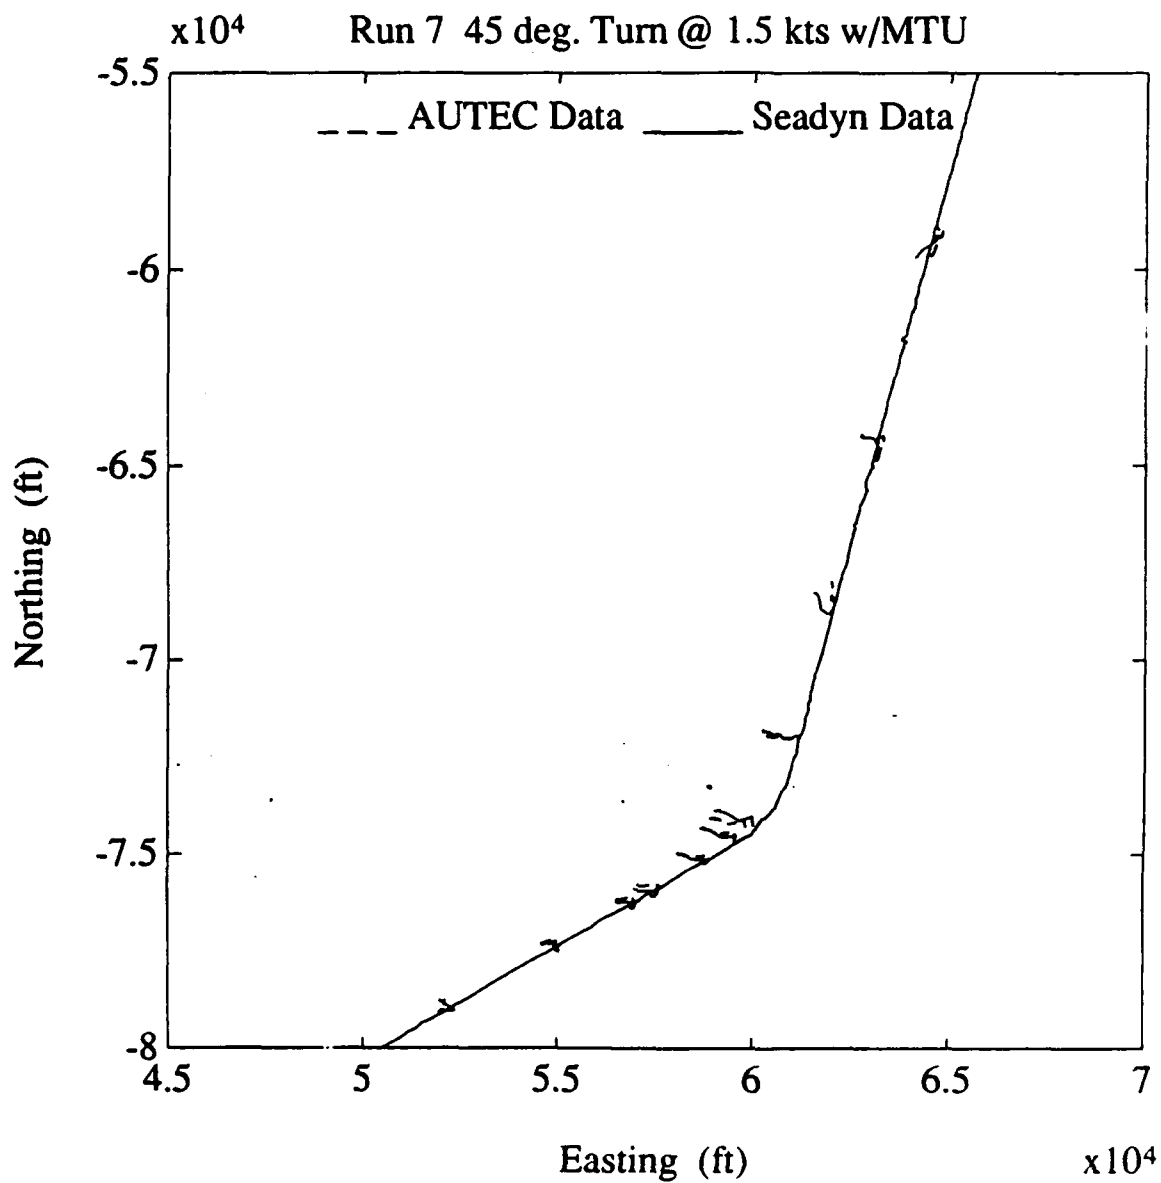


Figure B-17. Run 7 45-degree turn at 1.5 knots without MTU.

## Appendix C

### PARAMETRIC ANALYSES RESULTS

Parametric analyses were conducted to better understand the behavior of the SOAR cable and the modeling process (see Appendix B). Three separate sets of parametric runs were completed. The first set of parametric runs (Figures C-1a through C-7a) was a study of the effects that the drag coefficient produced on the cable trajectories. It can be seen from these graphs that a change in drag coefficient as little as 10 percent can change the final resting position of the node as much as 200 feet. This further confirms that the normal drag coefficient of  $2.54 \pm 0.1$  is an accurate constant for these conditions.

The second parametric study (Figures C-1b through C-7b) looked at the effects of variations in the current profile with only changes to the bottom one-third of the water column. This illustrated the importance of knowing the current for this section of the water column. It also shows that current does not have as great an effect on the cable trajectories when the barge is altering course.

The final parametric study (Figures C-1c through C-7c) considered the effects of more extreme current changes, such as those caused by the failure of a data collection system in an on-site real-time simulation model. Again, the cable trajectories appeared to be affected less by the change in currents when the deploying vessel was altering course.

Current profiles of all the parametric analyses can be seen in Figures A-2 and A-3. Figure A-4 show that pingers 1 through 3 are before the change in barge path. Pingers 4 through 7 are affected by the 90-degree turn.

Run 6 90 deg. Turn @ 1.5 kts w/MTU

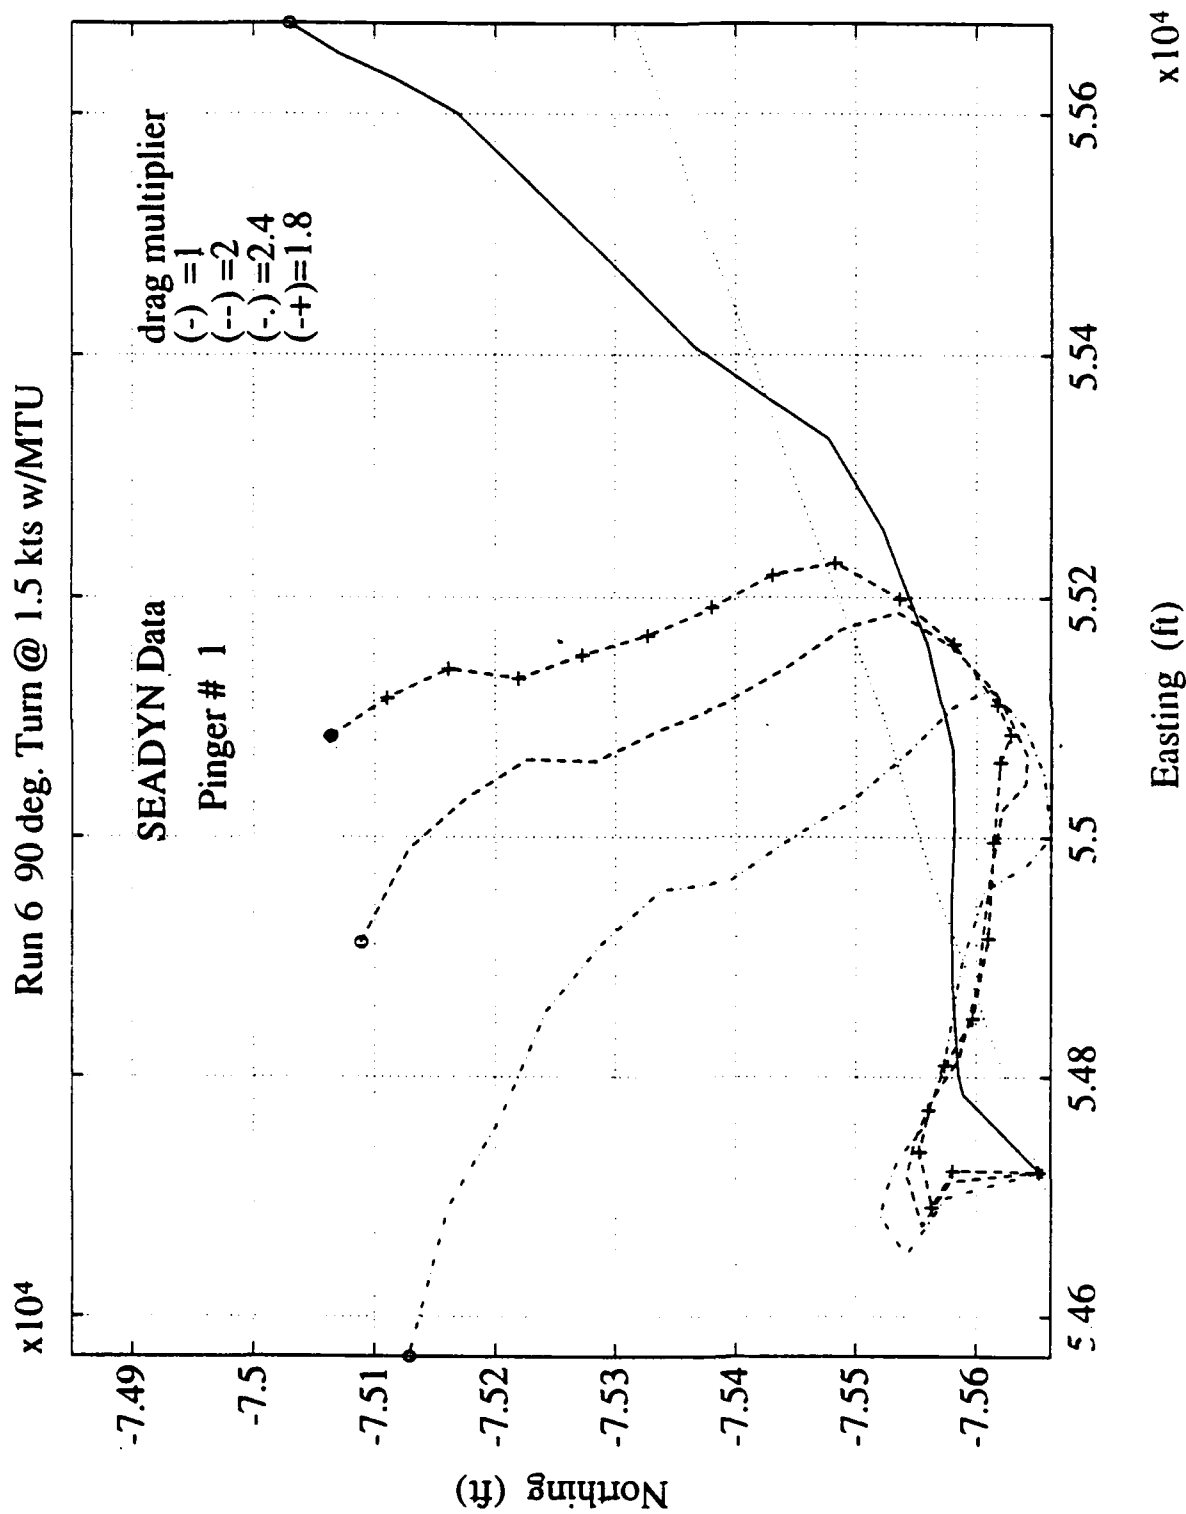


Figure C-1a. Pinger #1: effect of drag.

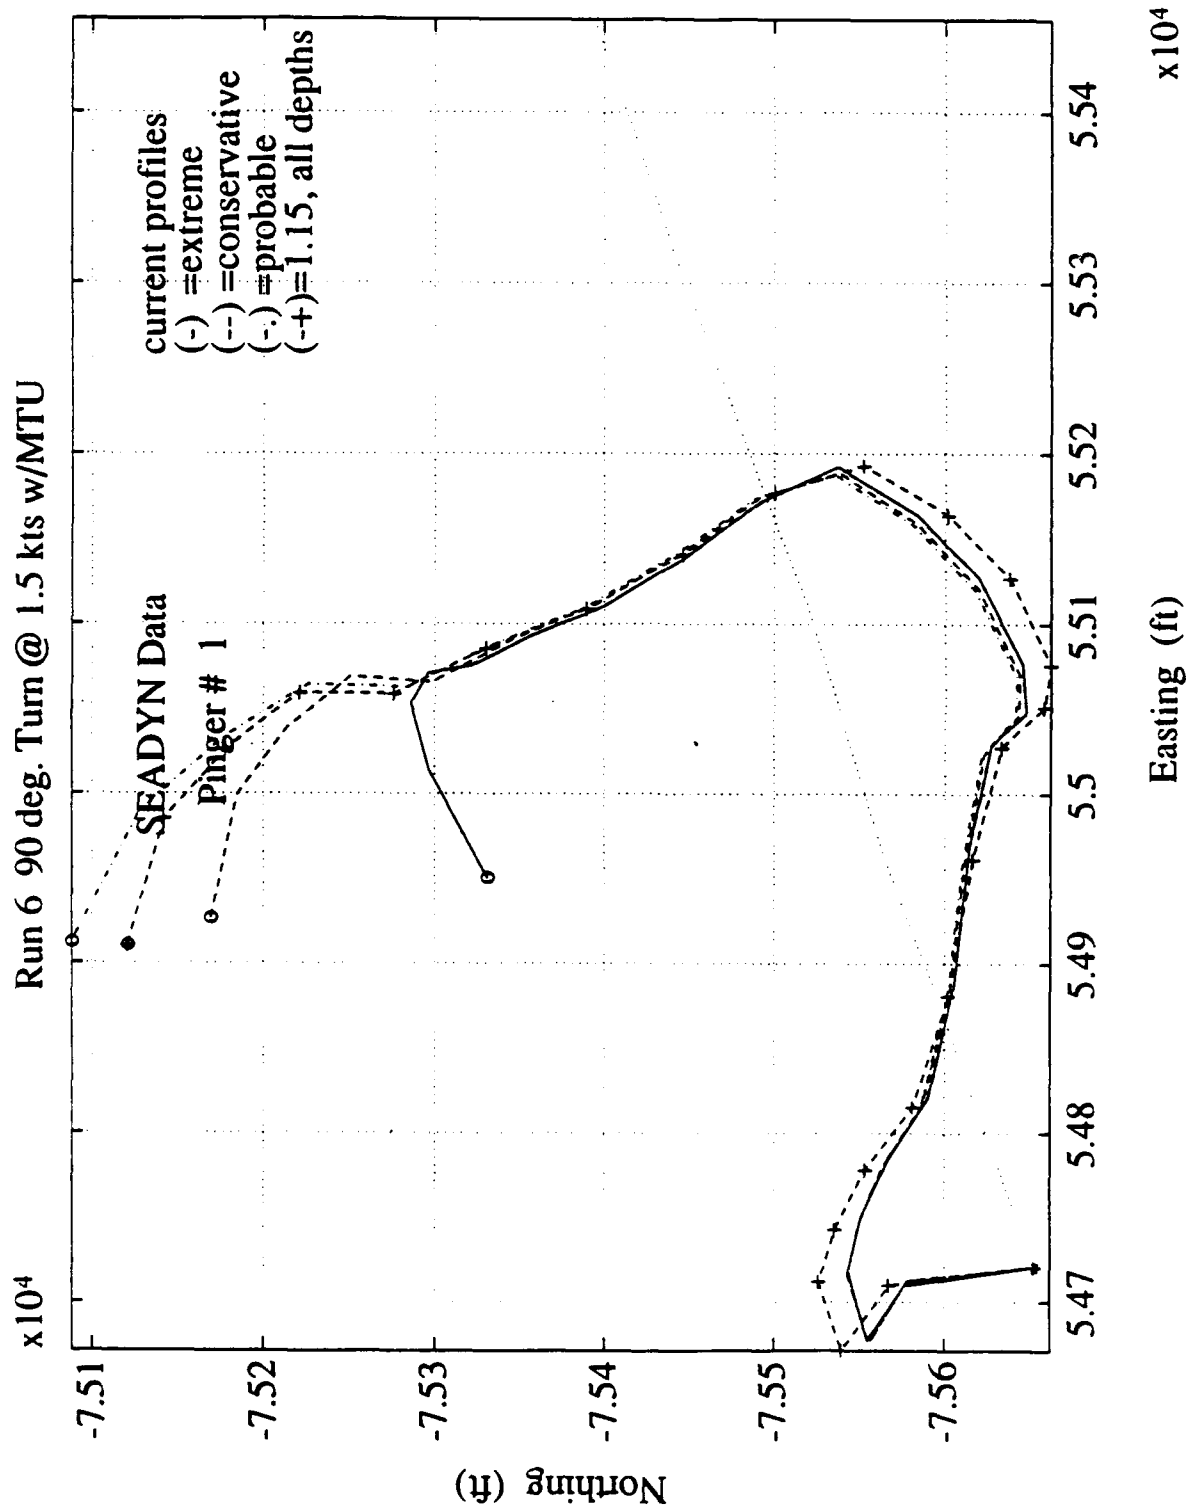


Figure C-1b. Pinger #1: effect of bottom current profile.

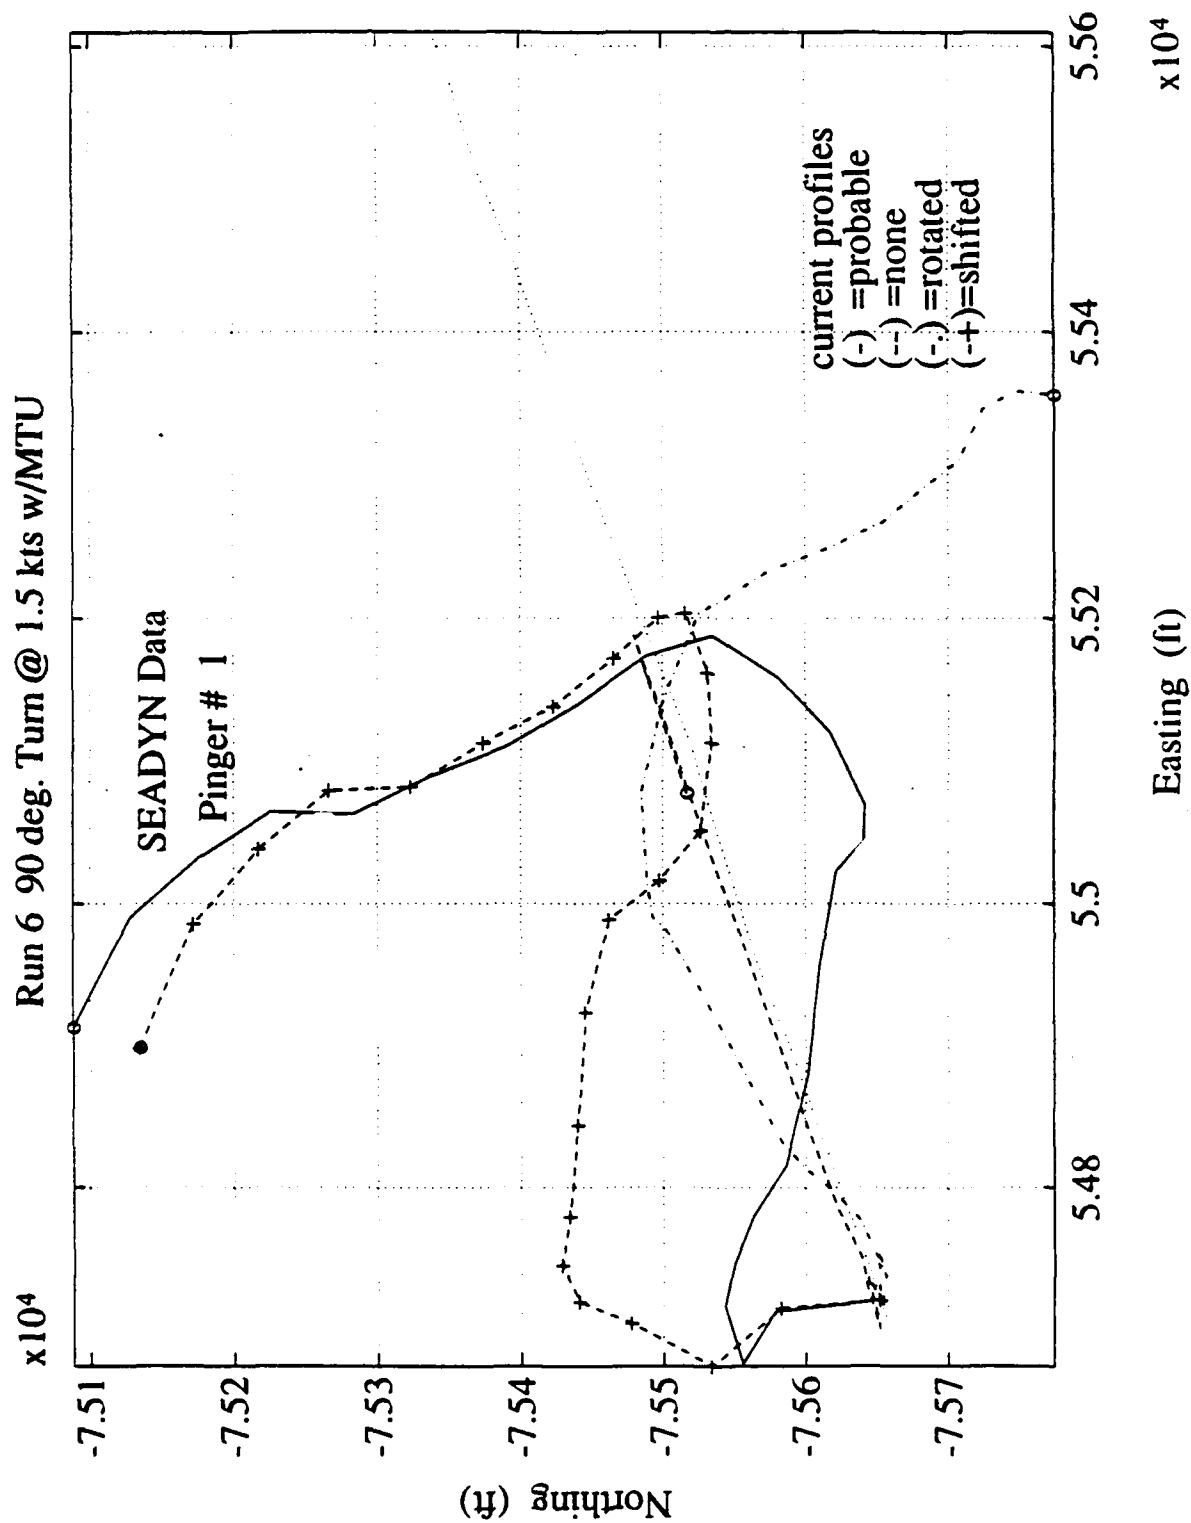


Figure C-1c. Pinger #1: effect of current profile.

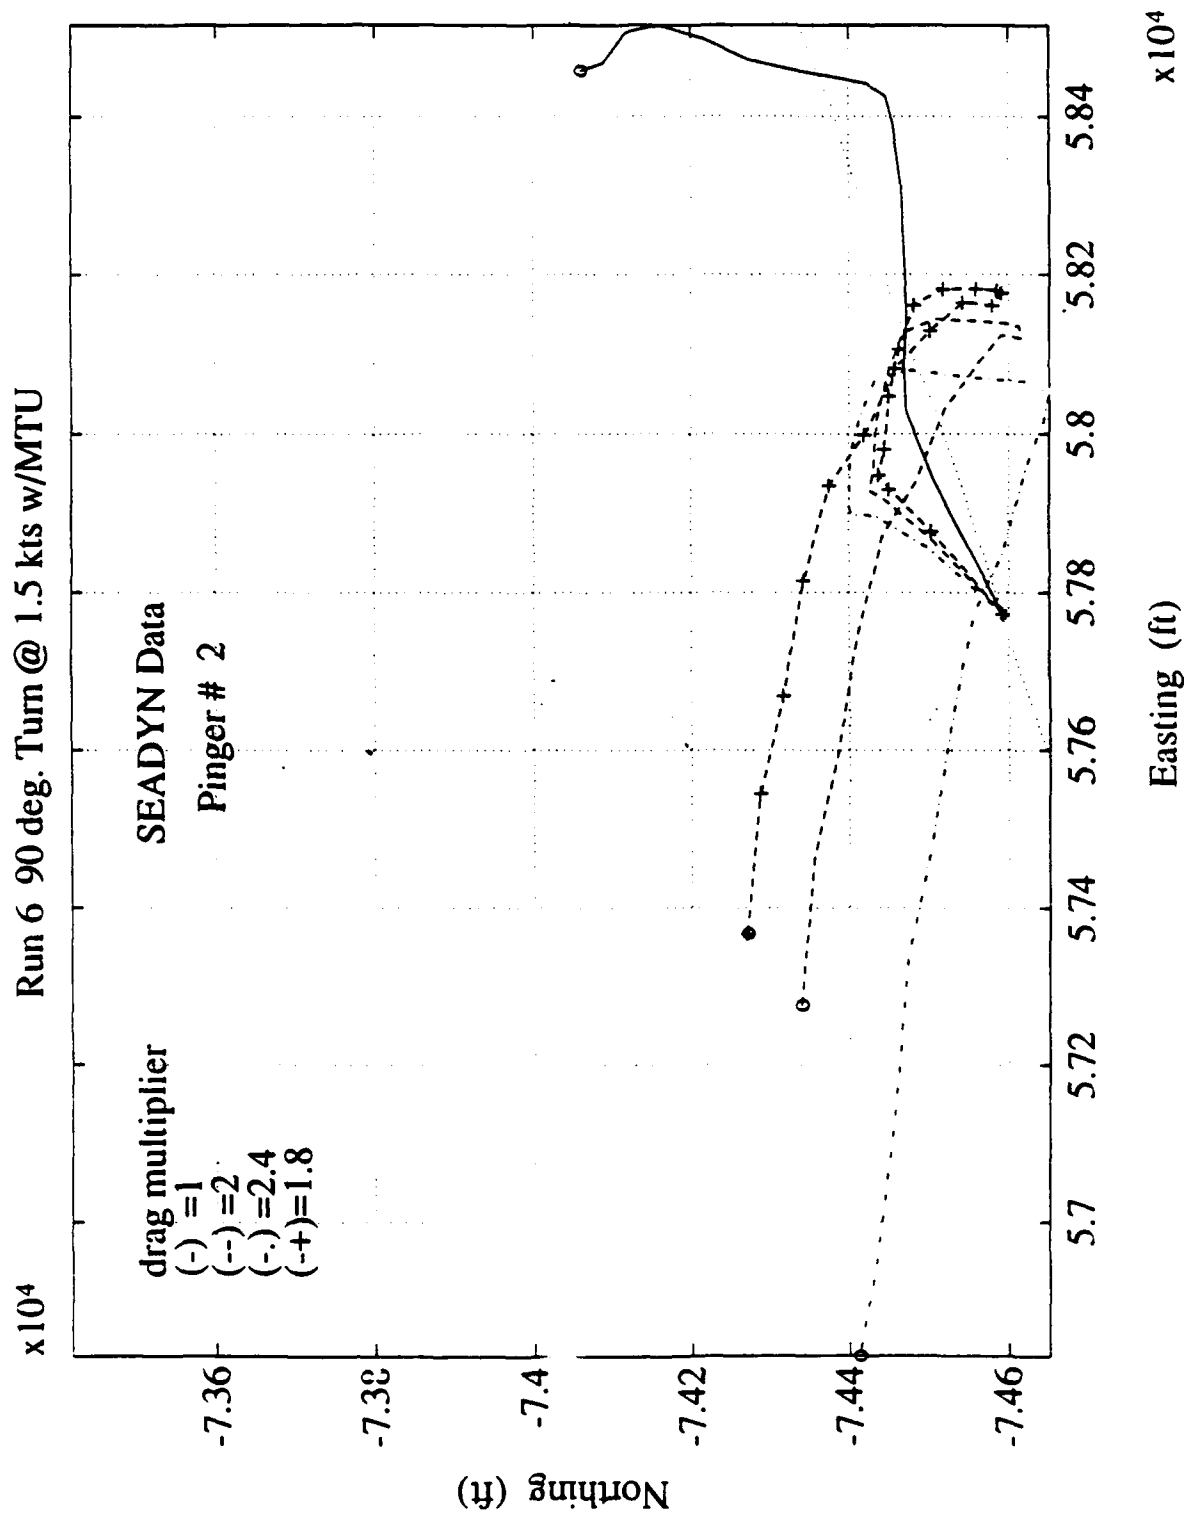


Figure C-2a. Pinger #2: effect of drag.

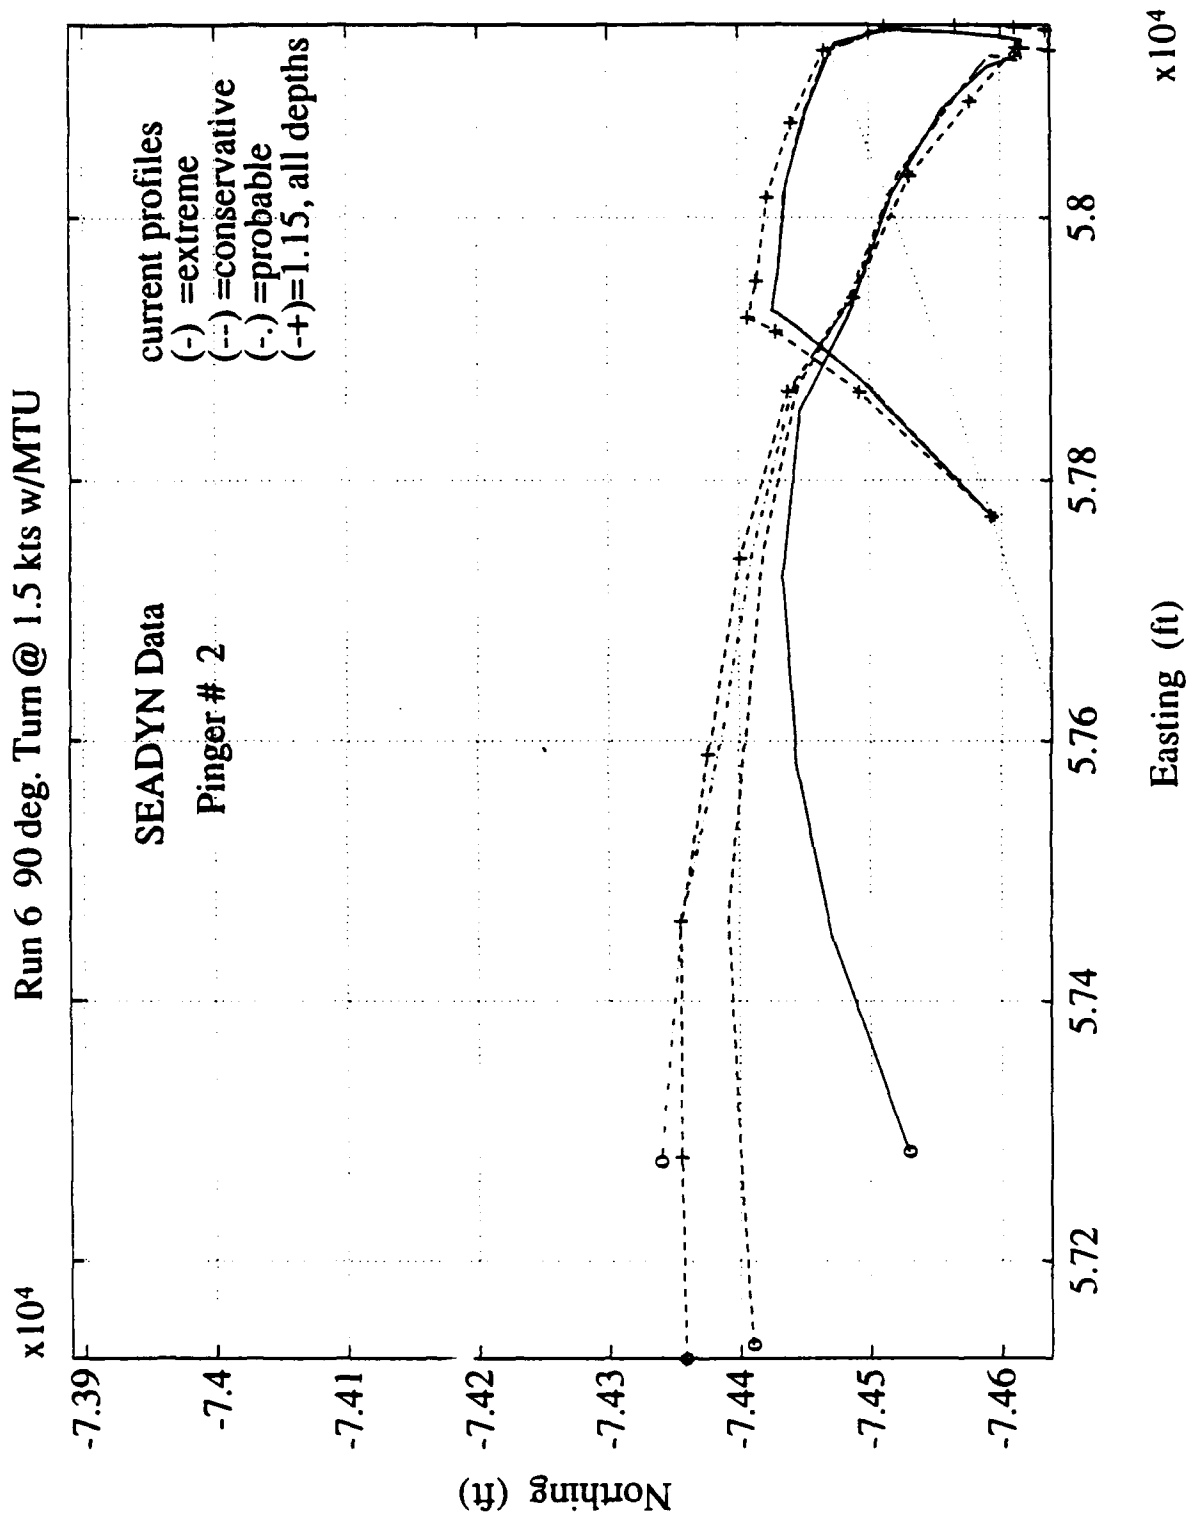


Figure C-2b. Pinger #2: effect of bottom current profile.



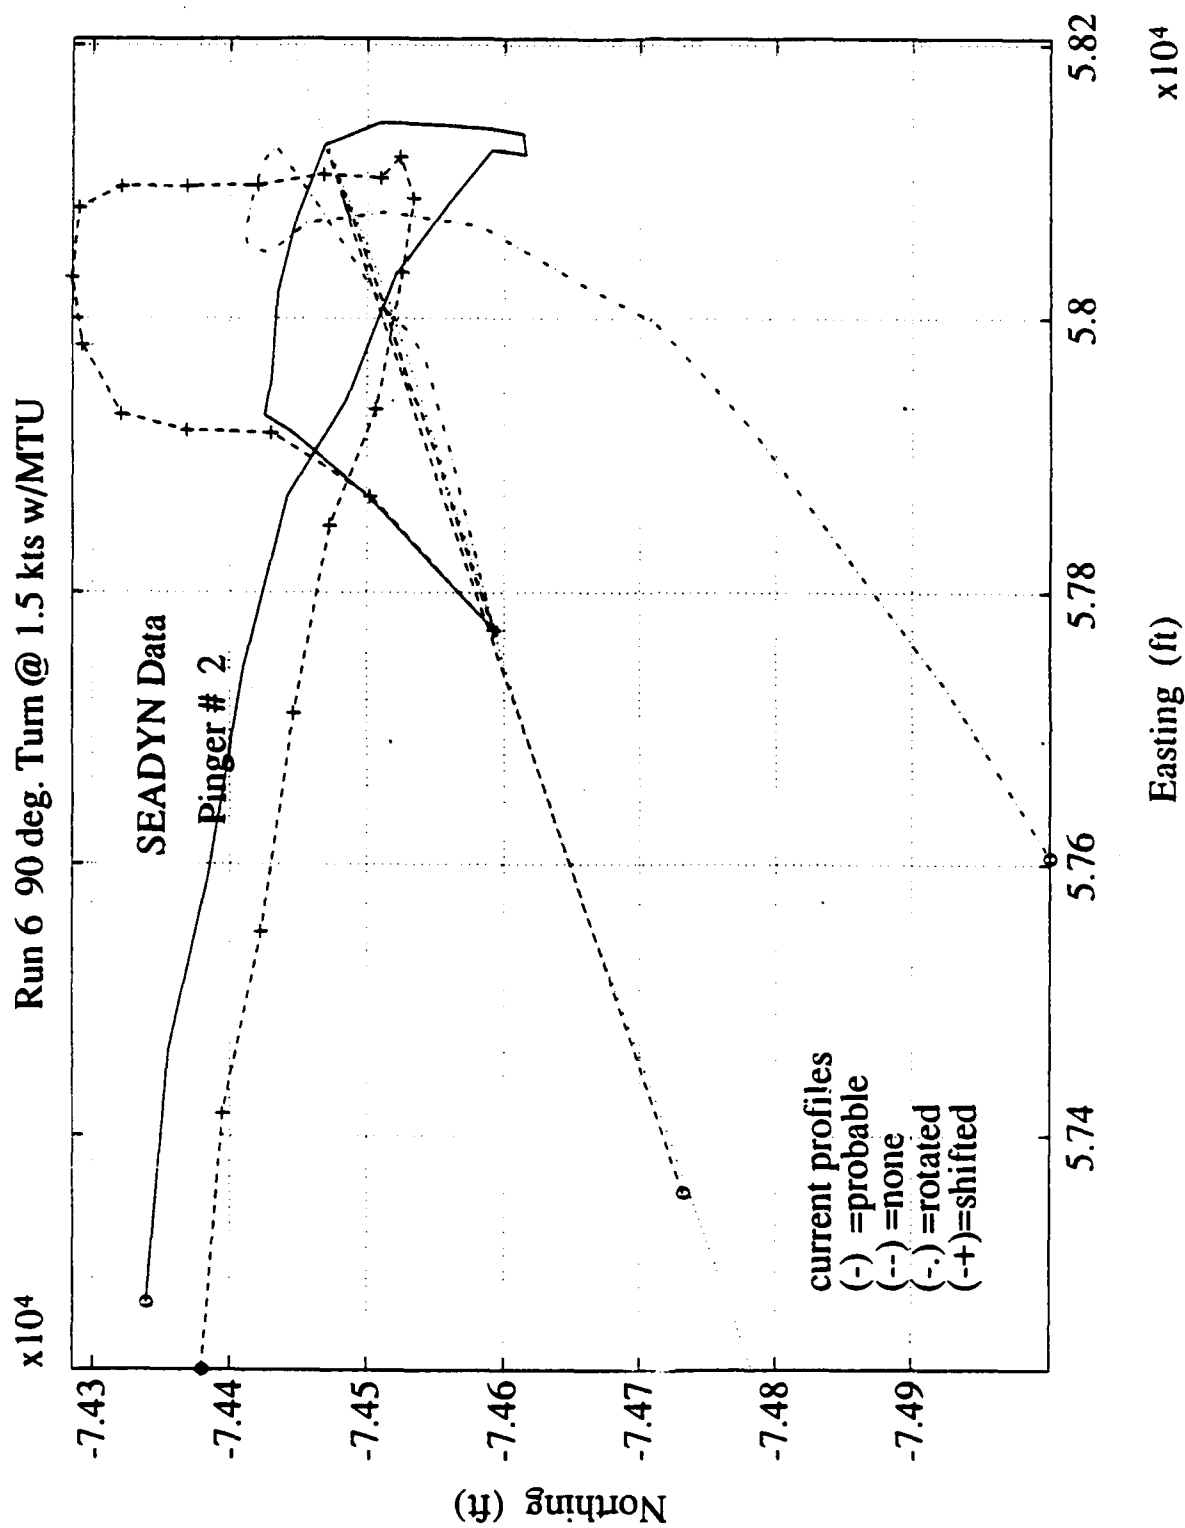


Figure C-2c. Pinger #2: effect of current profile.

Run 6 90 deg. Turn @ 1.5 kts w/MTU

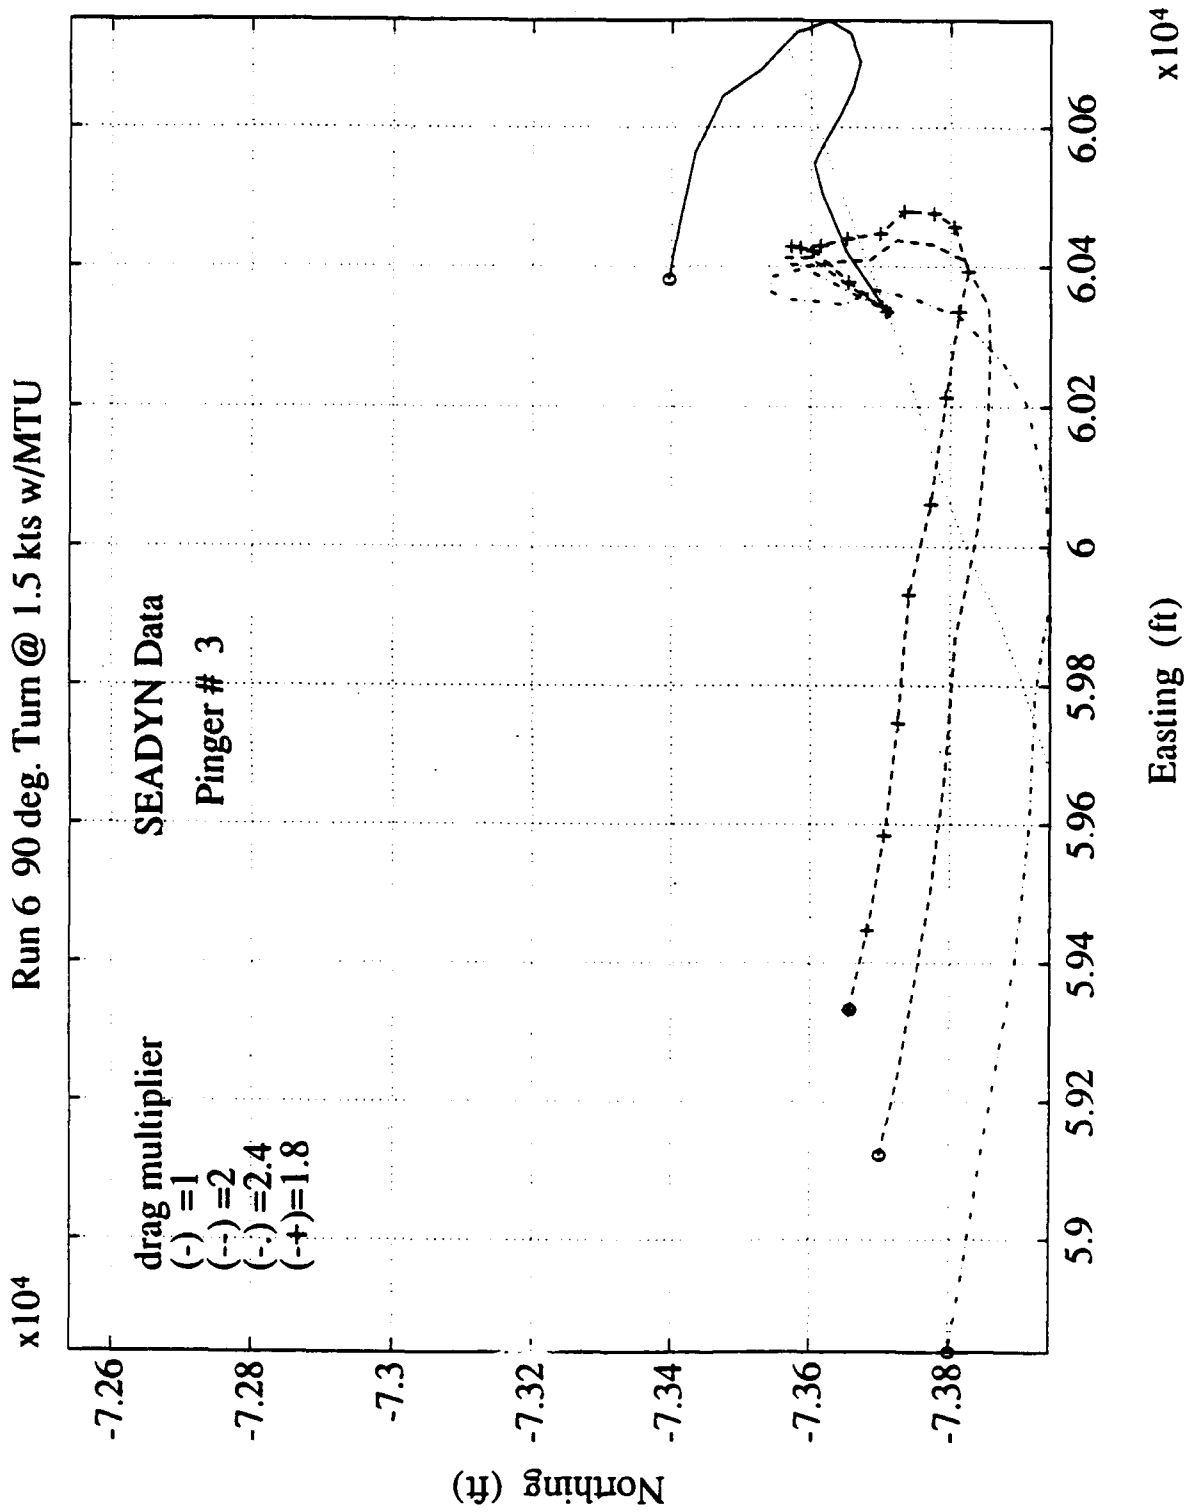


Figure C-3a. Pinger #3: effect of drag.

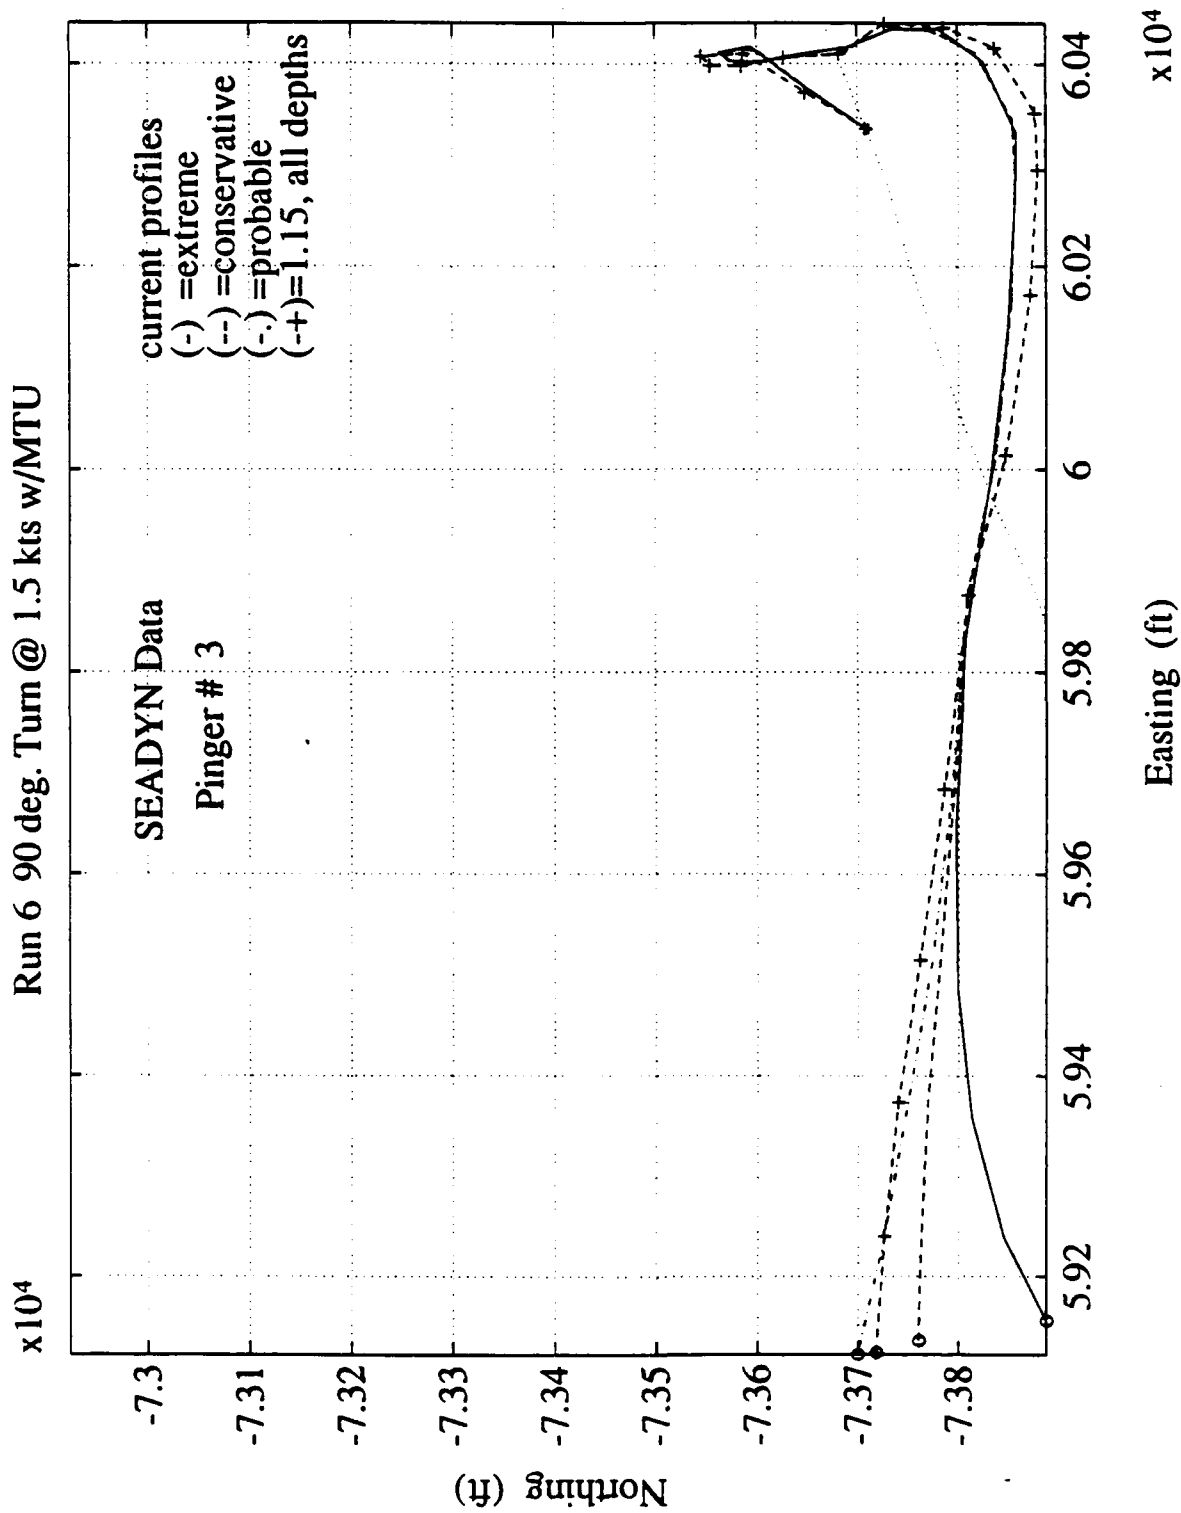


Figure C-3b. Pinger #3: effect of bottom current profile.

Run 6 90 deg. Turn @ 1.5 kts w/MTU

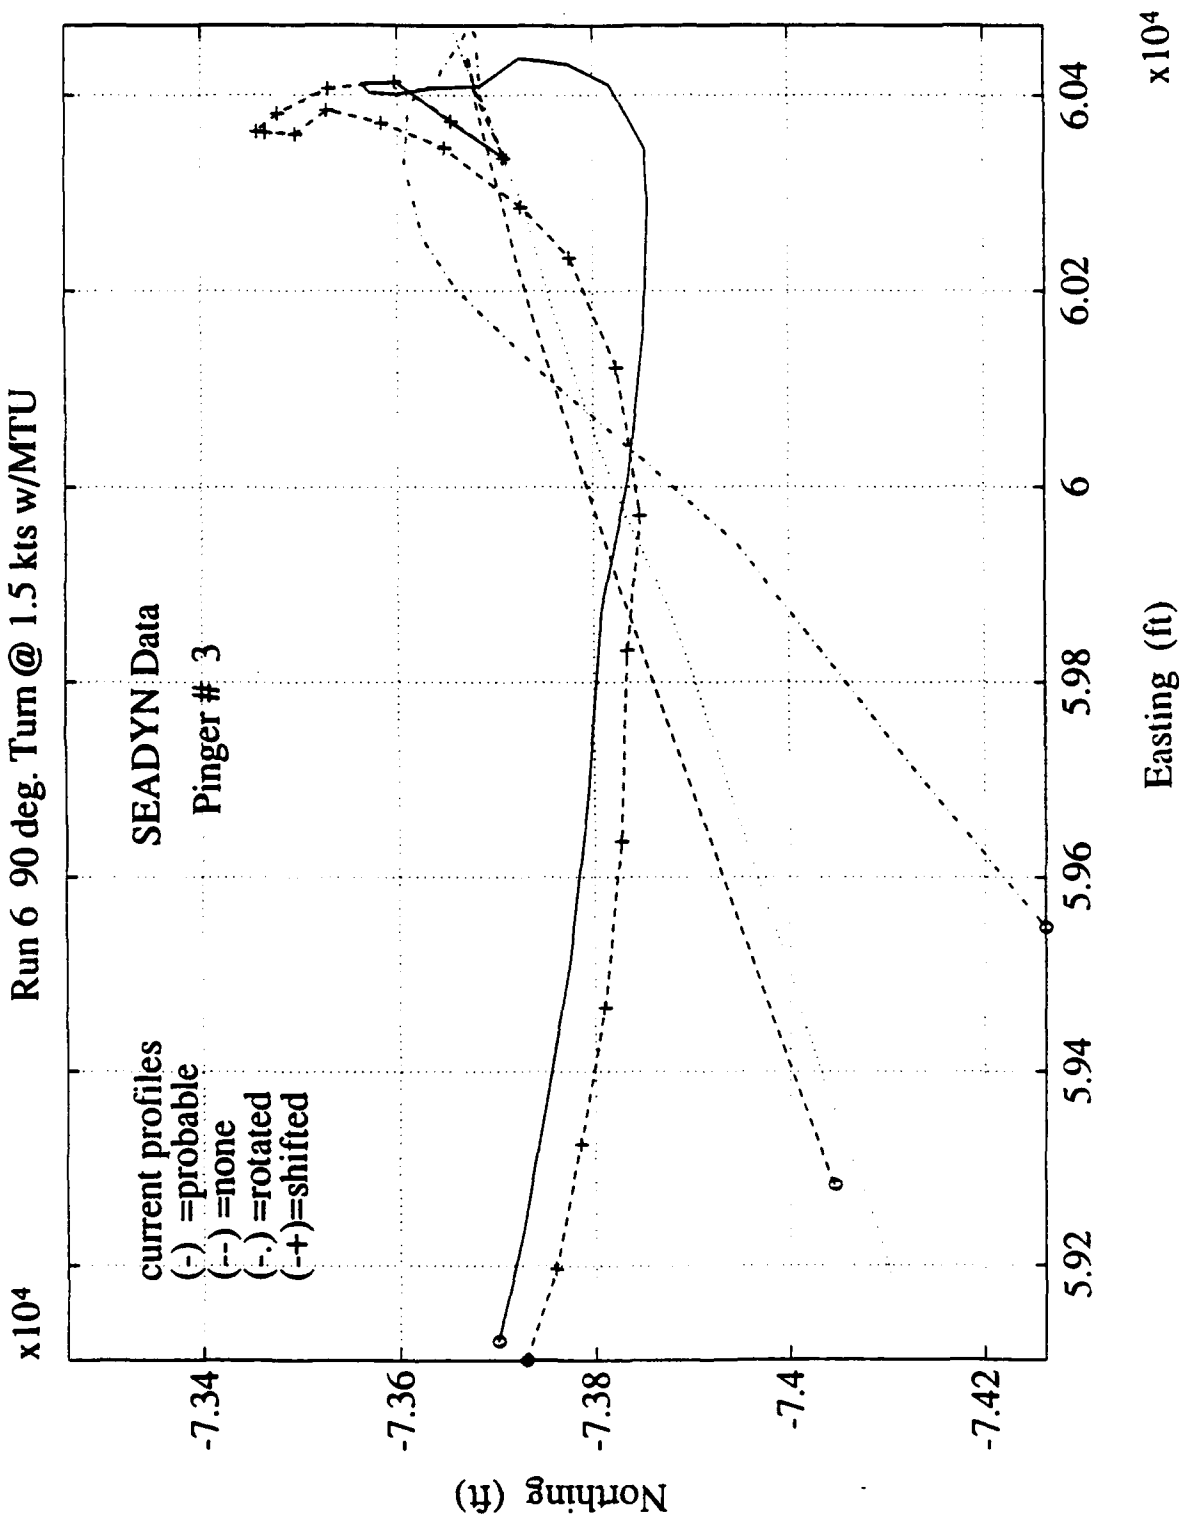


Figure C-3c. Pinger #3: effect of current profile.

Run 6 90 deg. Turn @ 1.5 kts w/MTU

$\times 10^4$

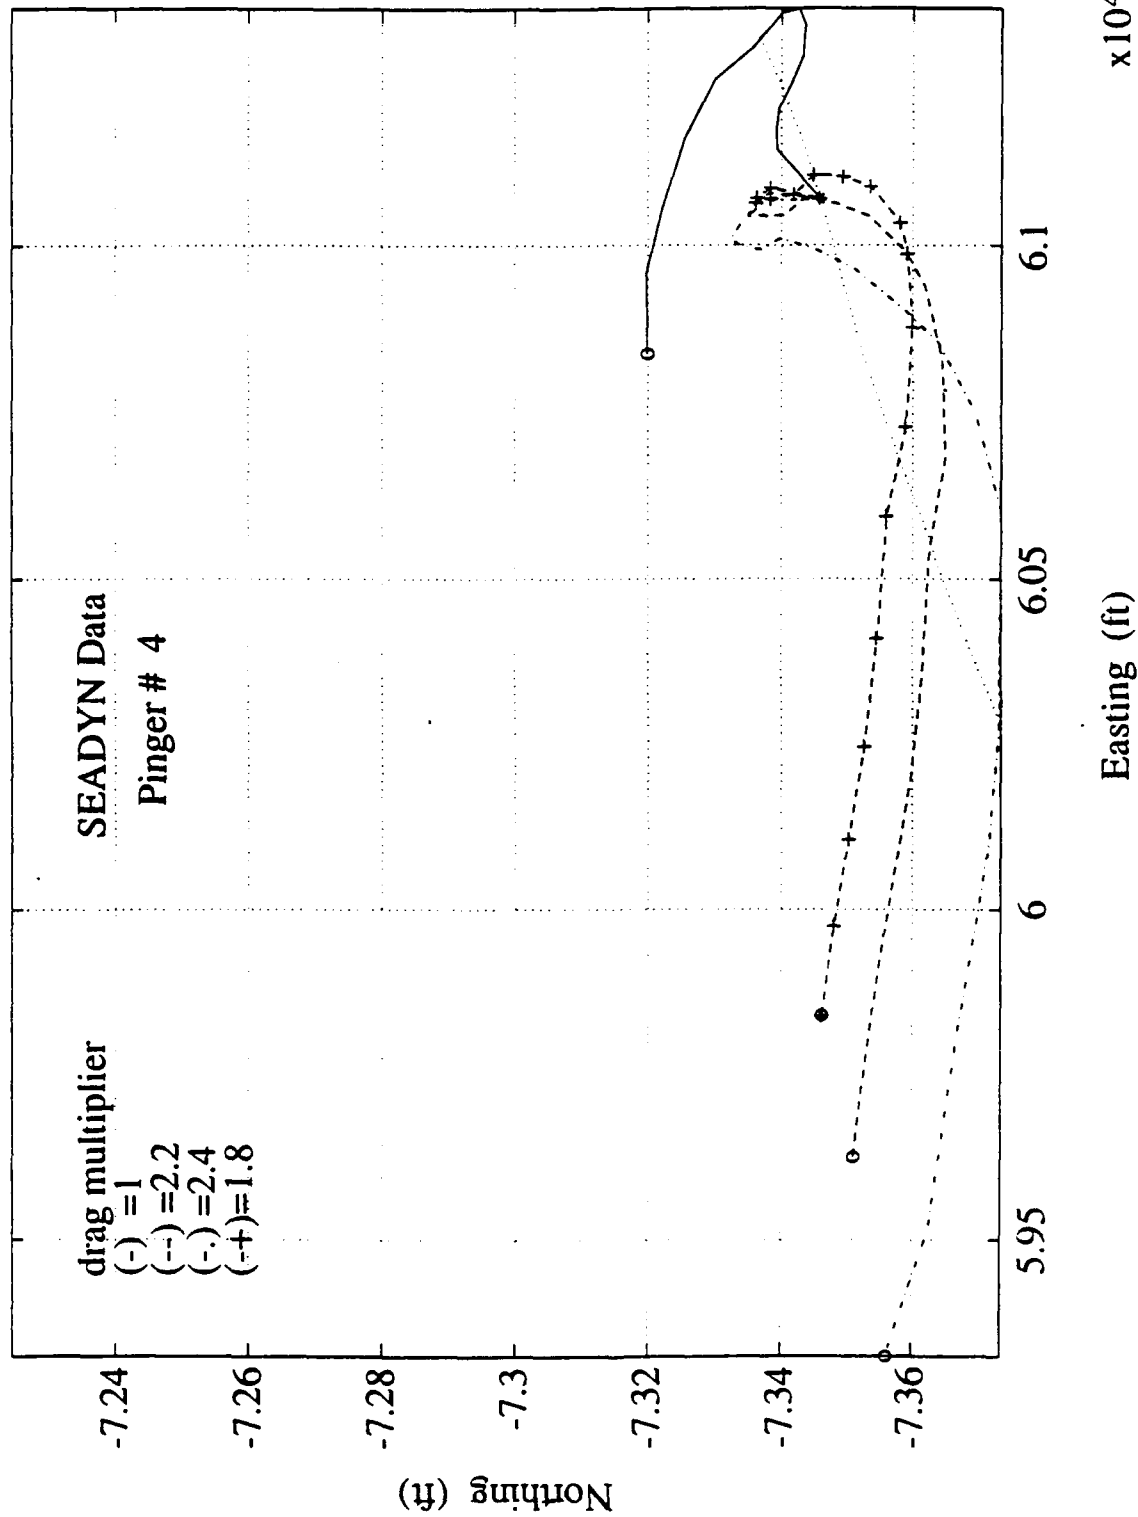
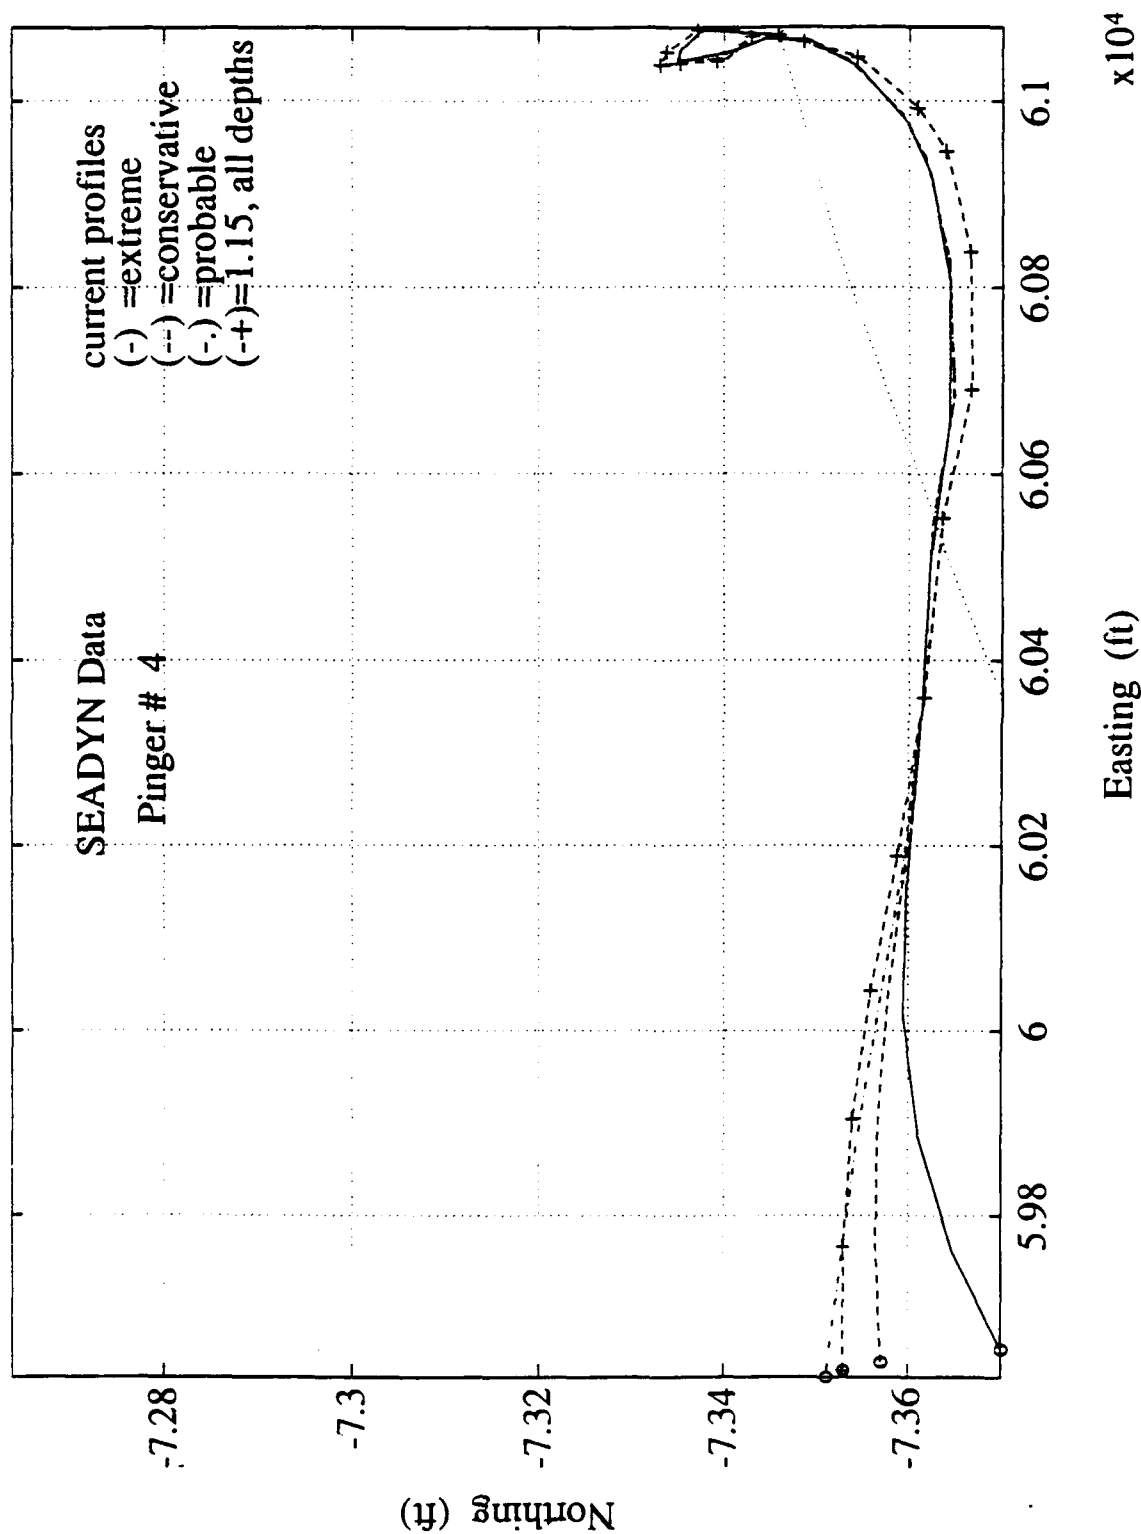


Figure C-4a. Pinger #4: effect of drag.



**Figure C-4b. Pinger #4: effect of bottom current profile.**

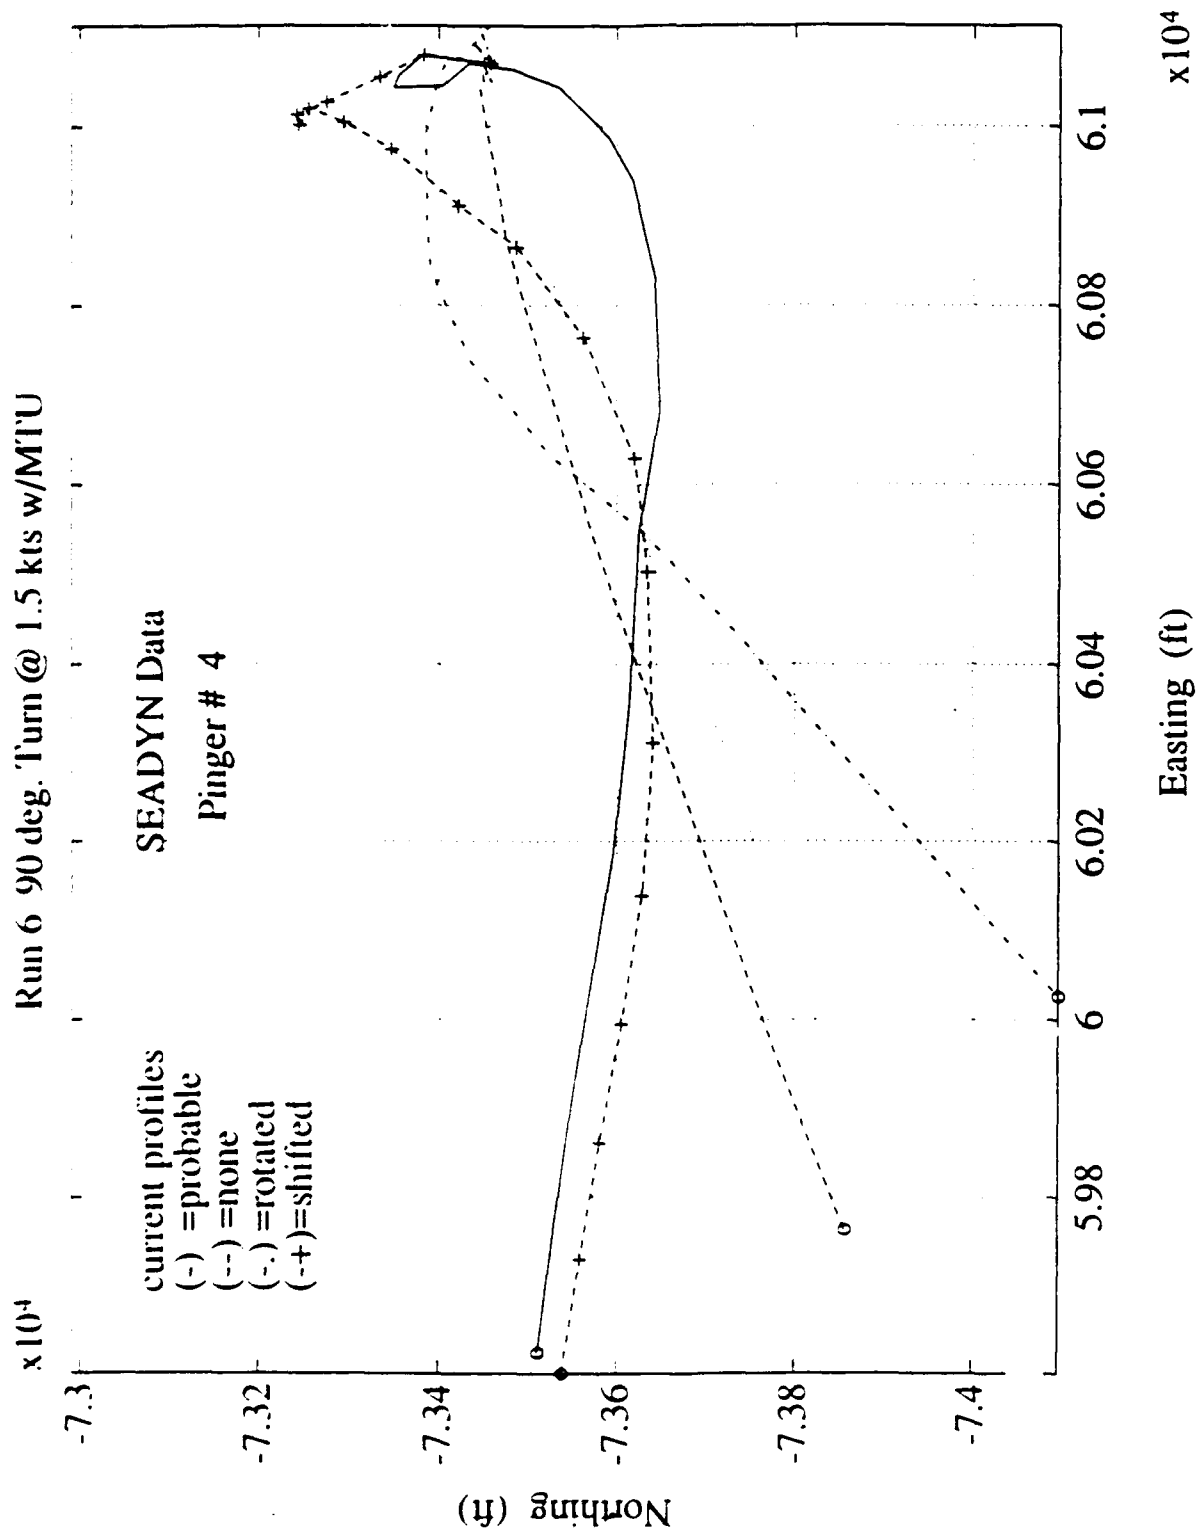


Figure C-4c. Pinger #4: effect of current profile.

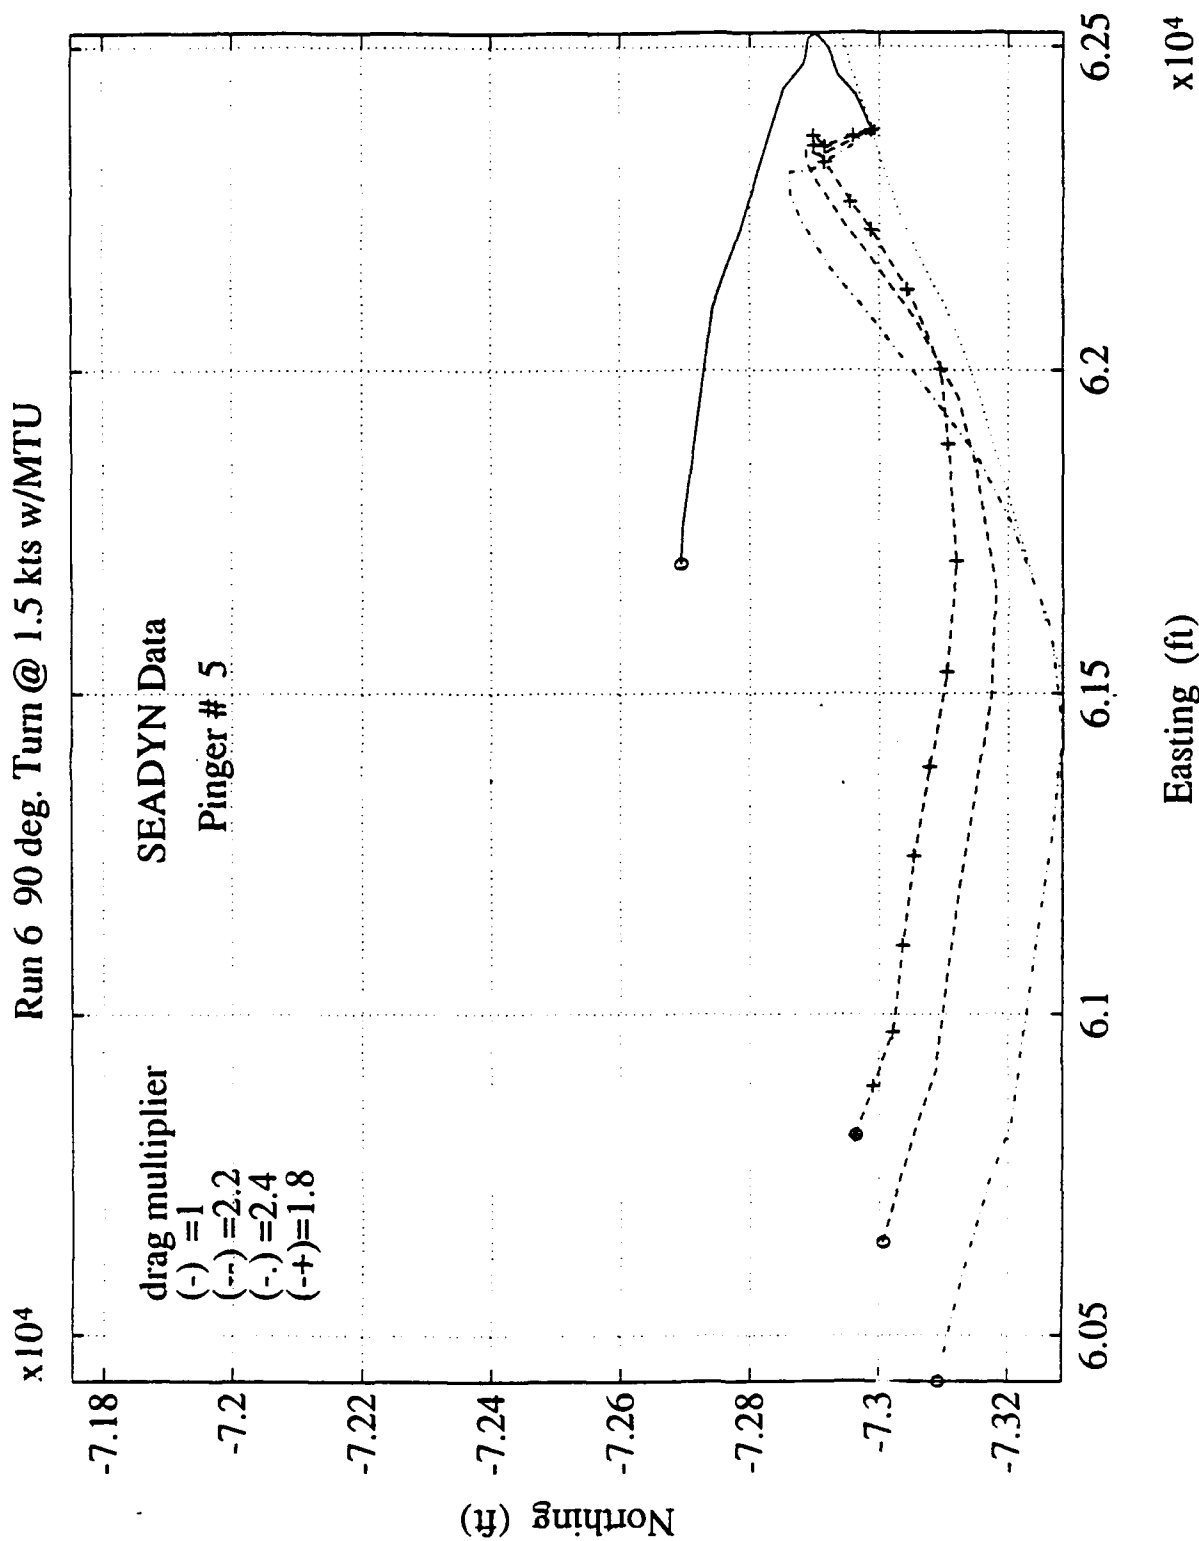
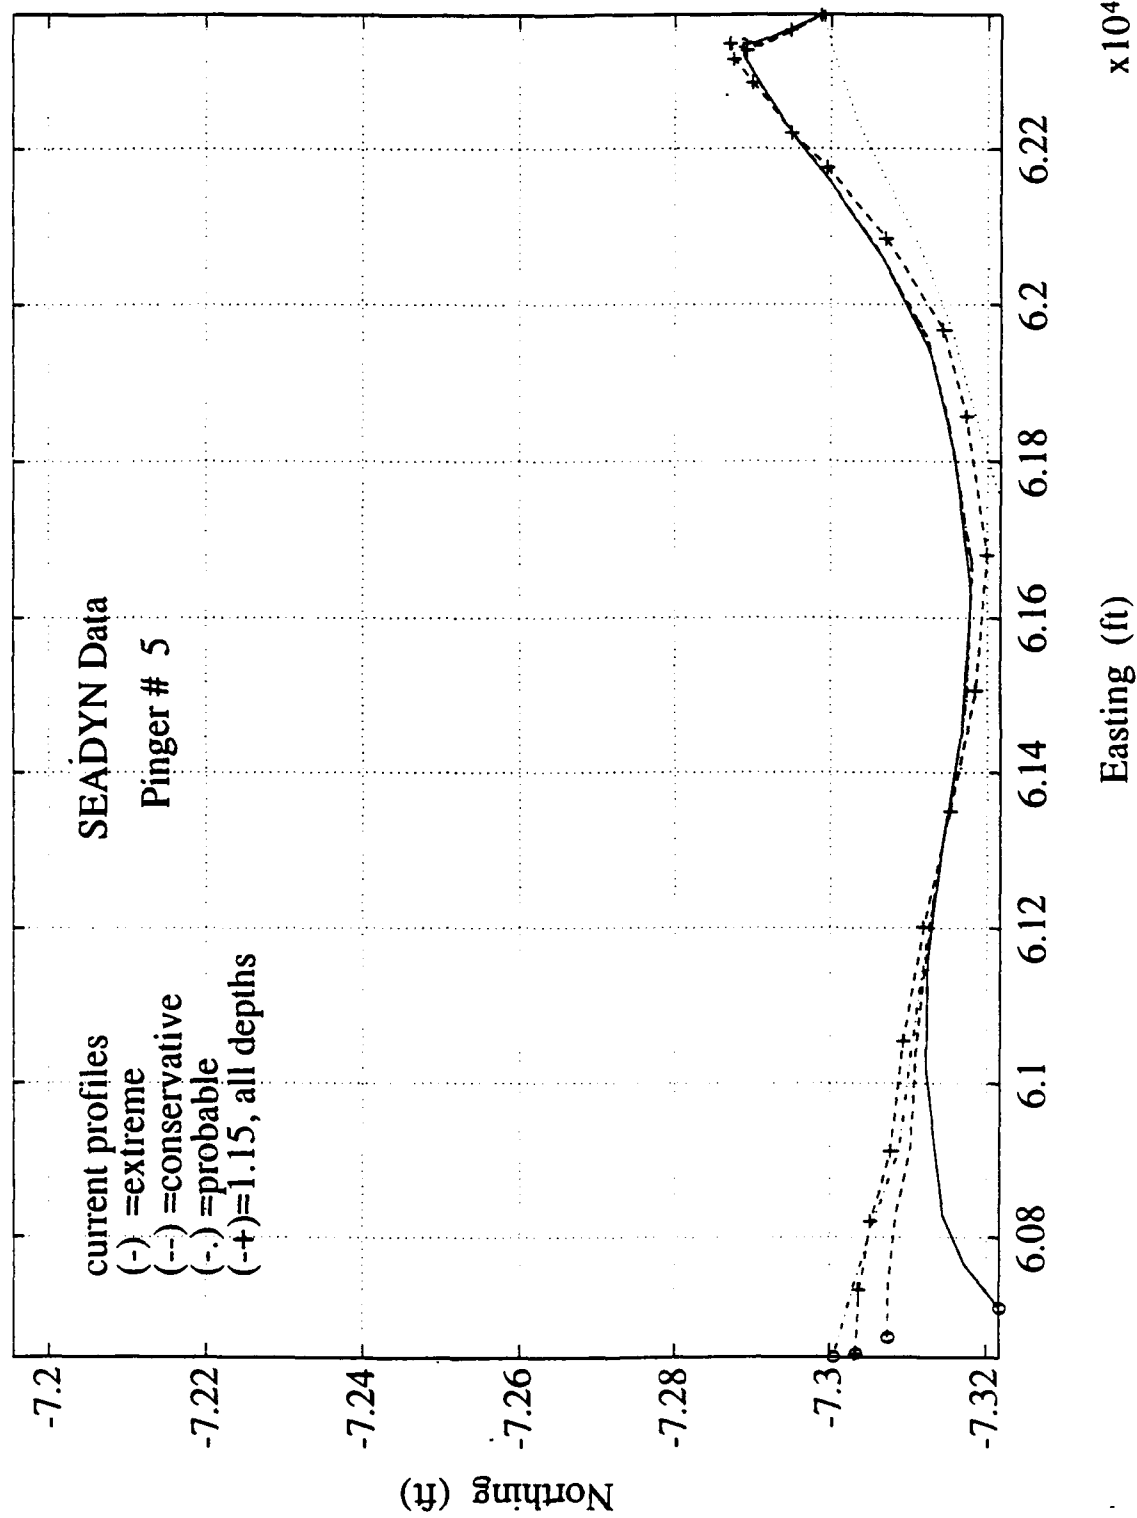


Figure C-5a. Pinger #5: effect of drag.





**Figure C-5b. Pinger #5: effect of bottom current profile.**

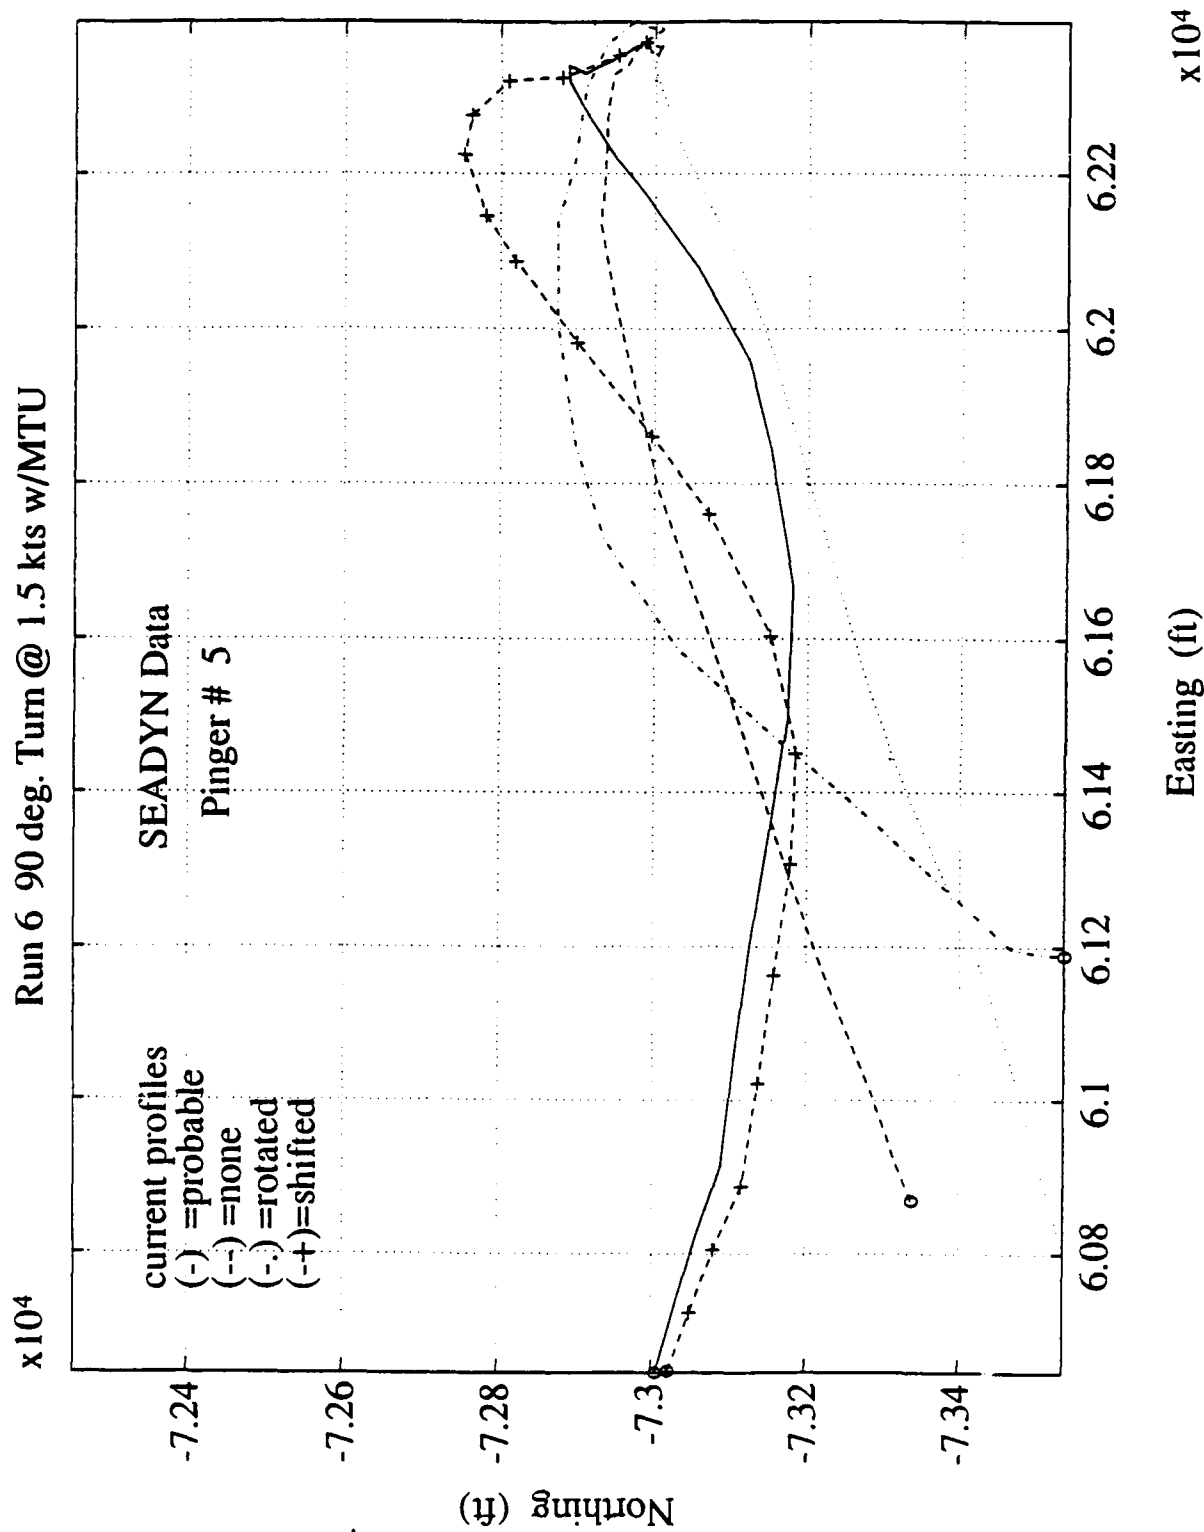


Figure C-5c. Pinger #5: effect of current profile.

# Run 6 90 deg. Turn @ 1.5 kts w/MTU

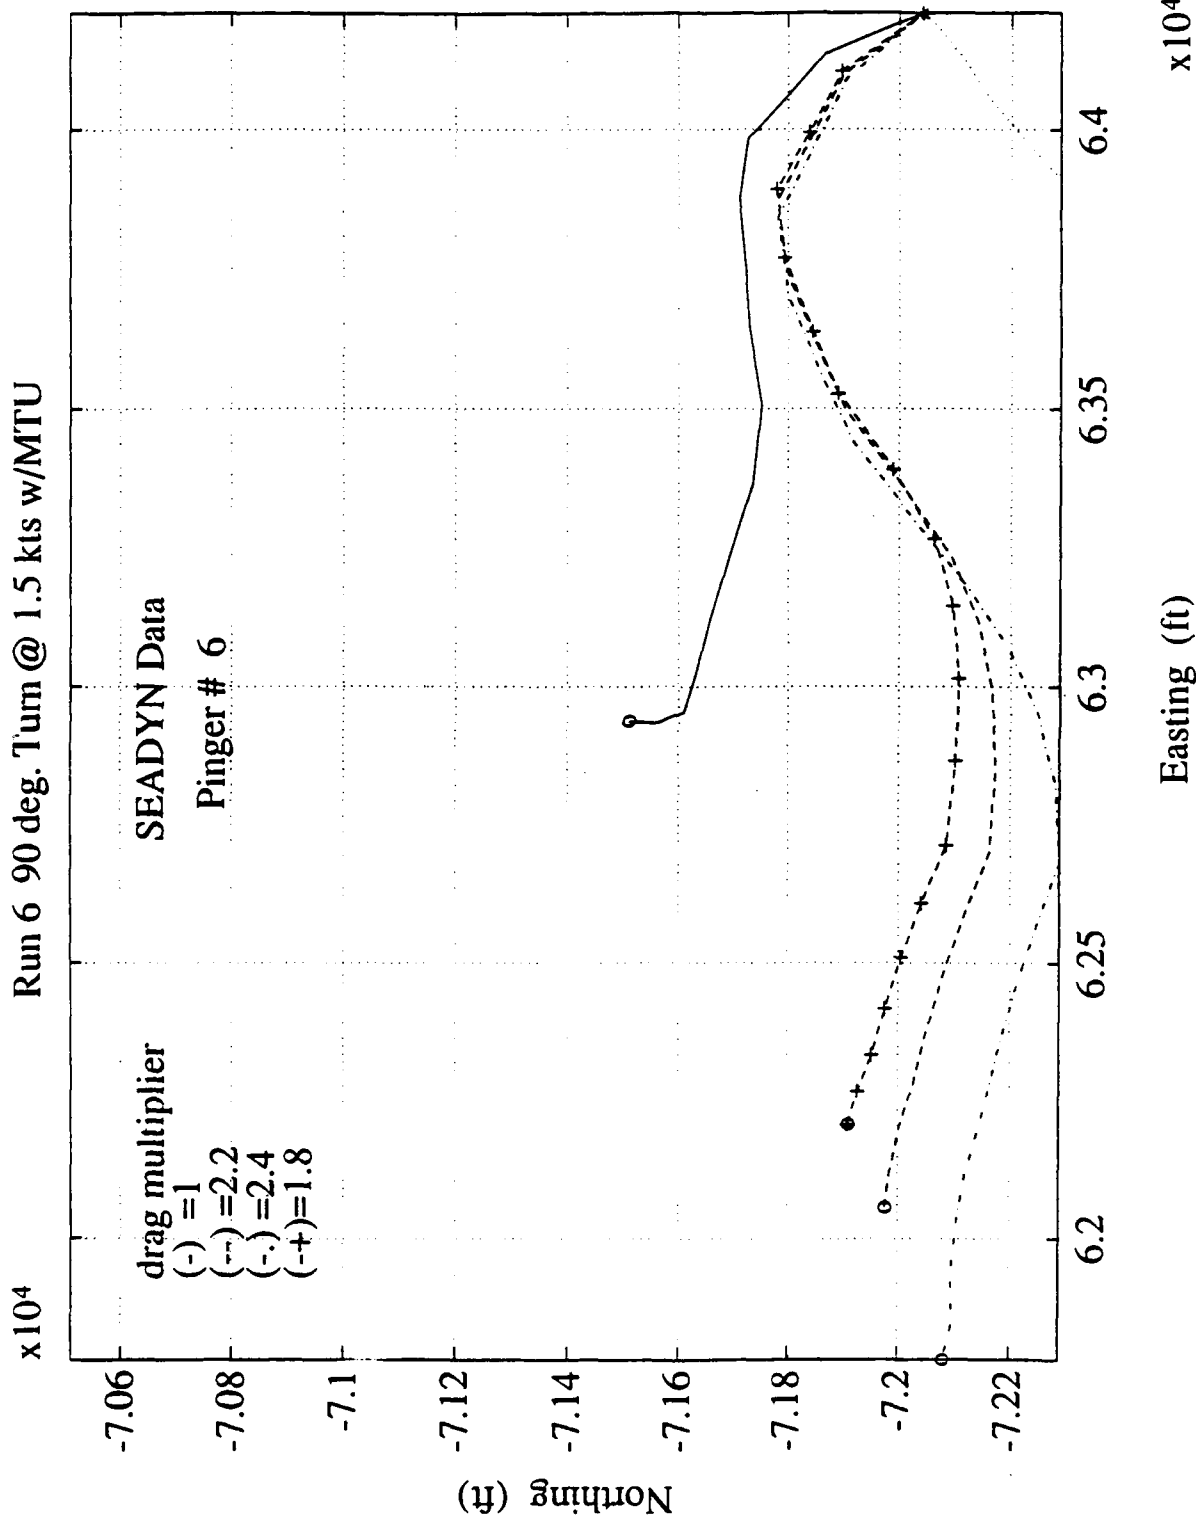


Figure C-6a. Pinger #6: effect of drag.

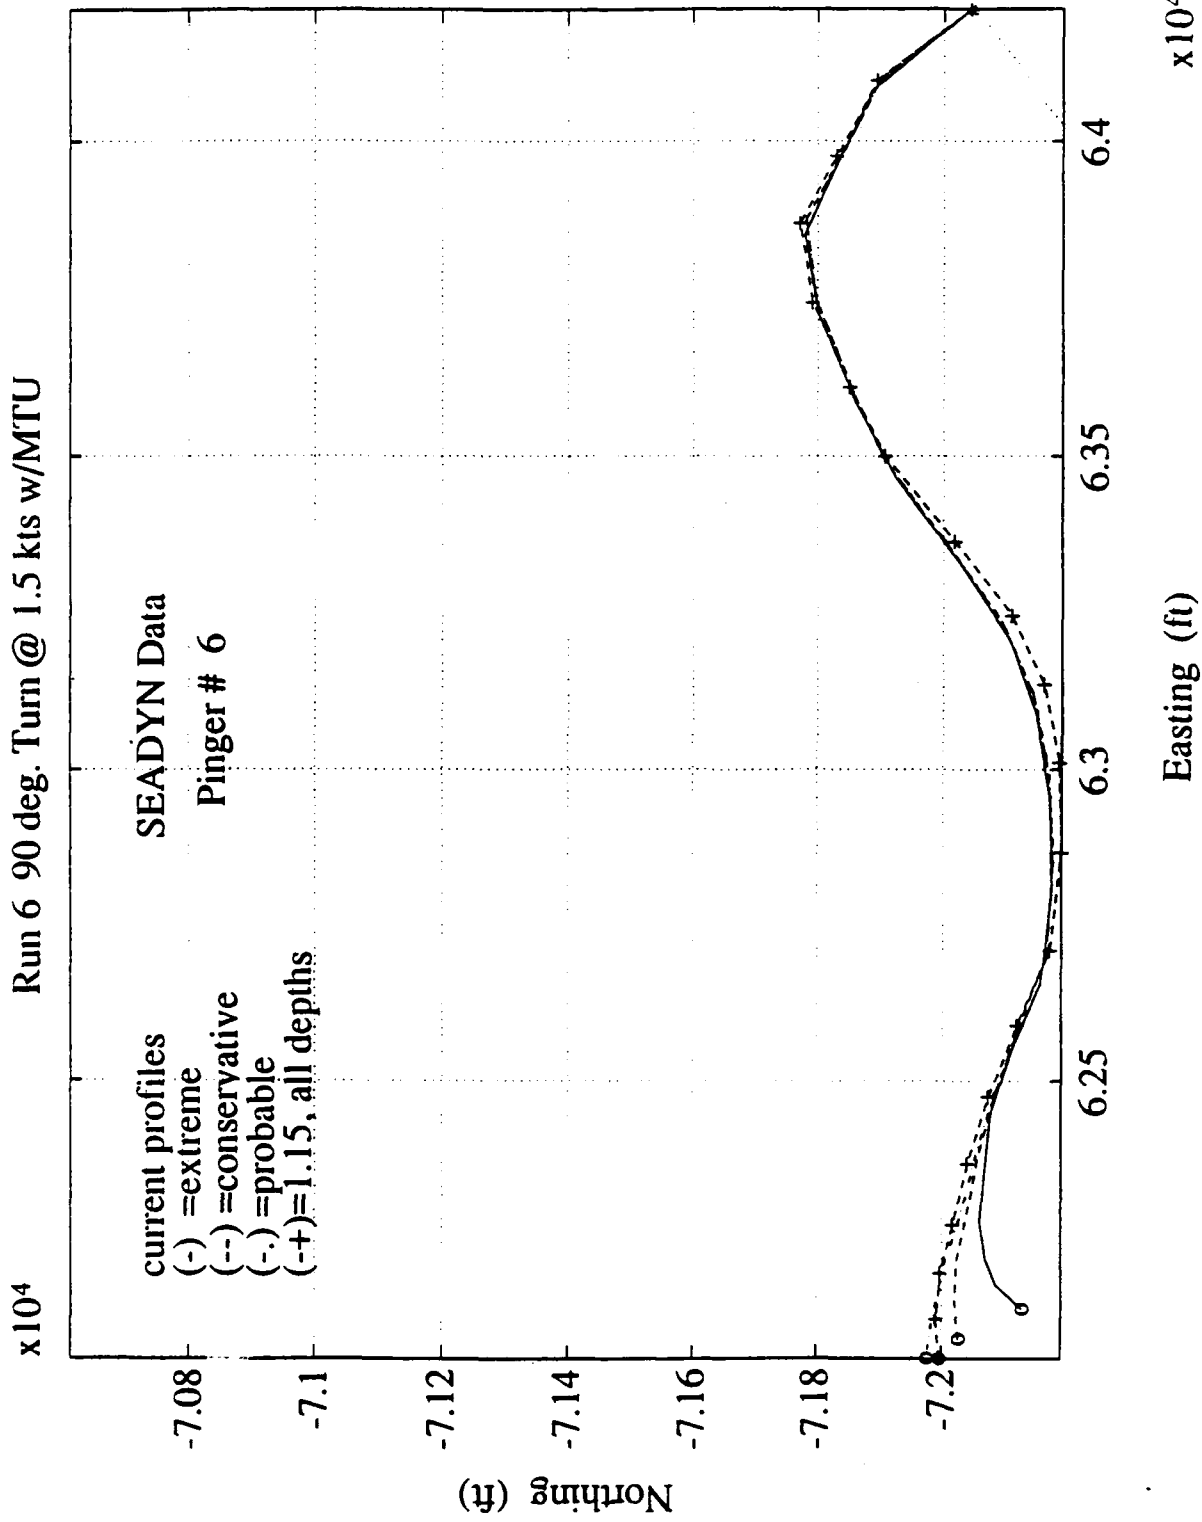


Figure C-6b. Pinger #6: effect of bottom current profile.

Run 6 90 deg. Turn @ 1.5 kts w/MTU

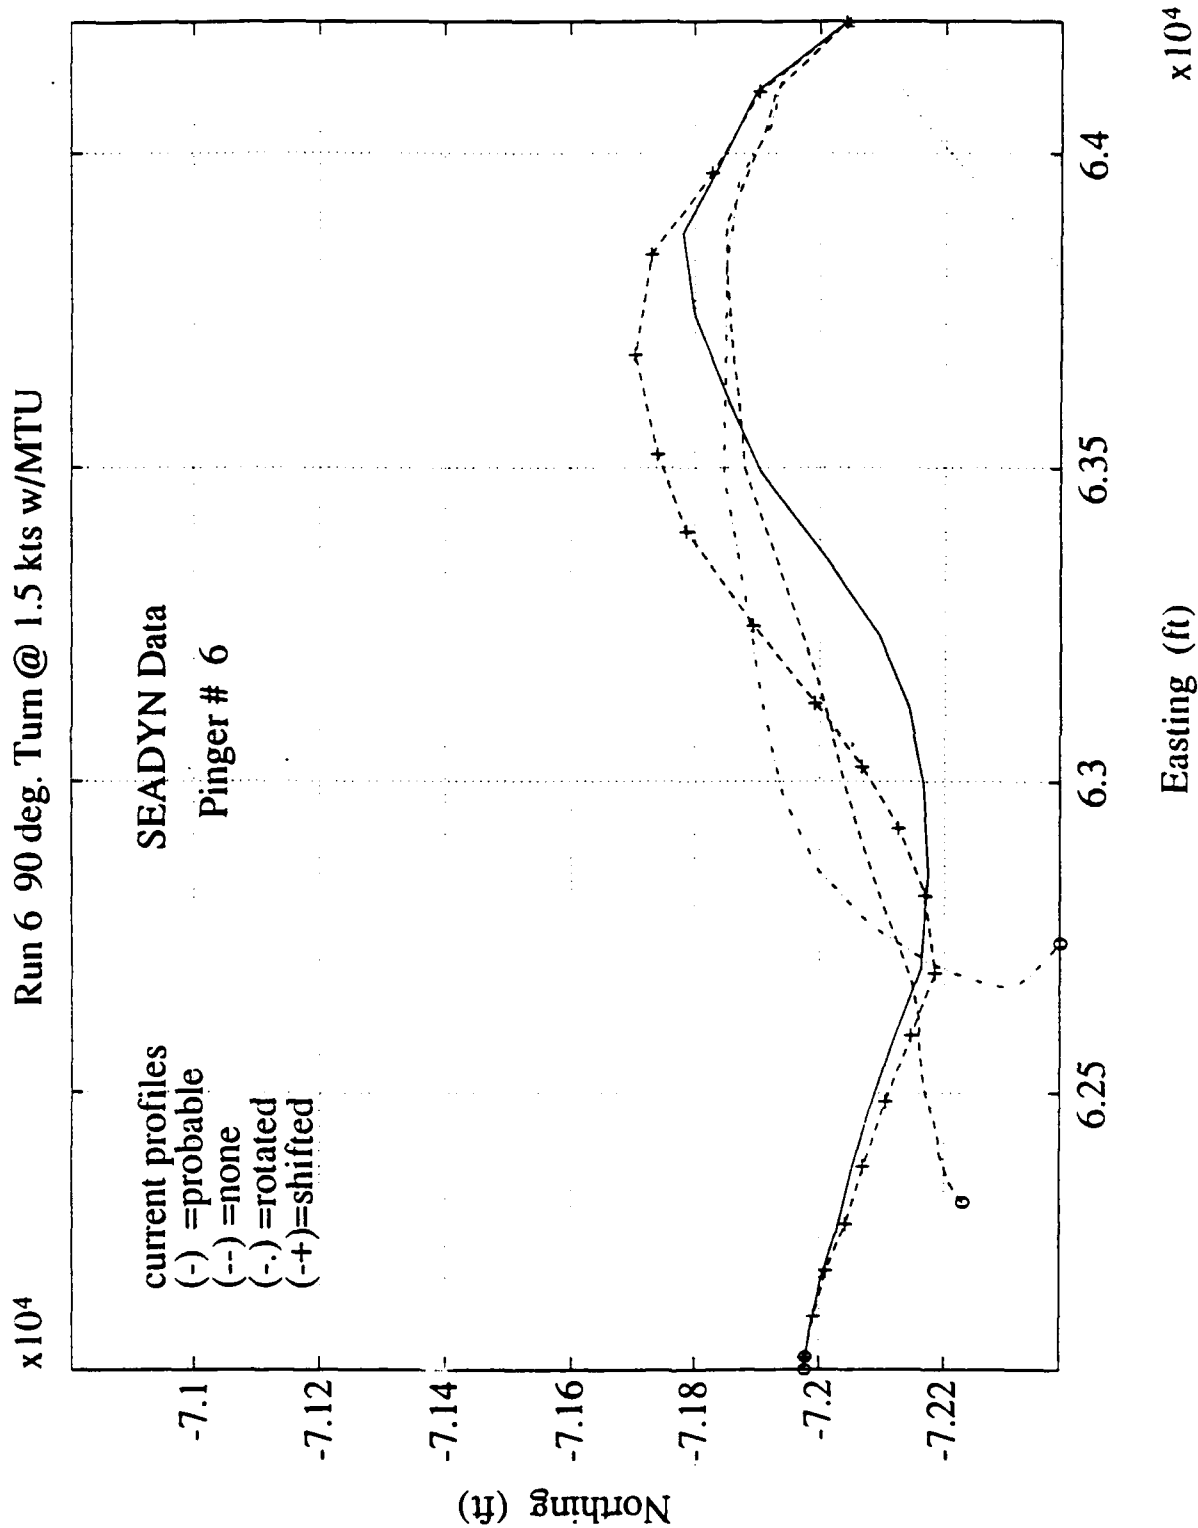


Figure C-6c. Pinger #6: effect of current profile.

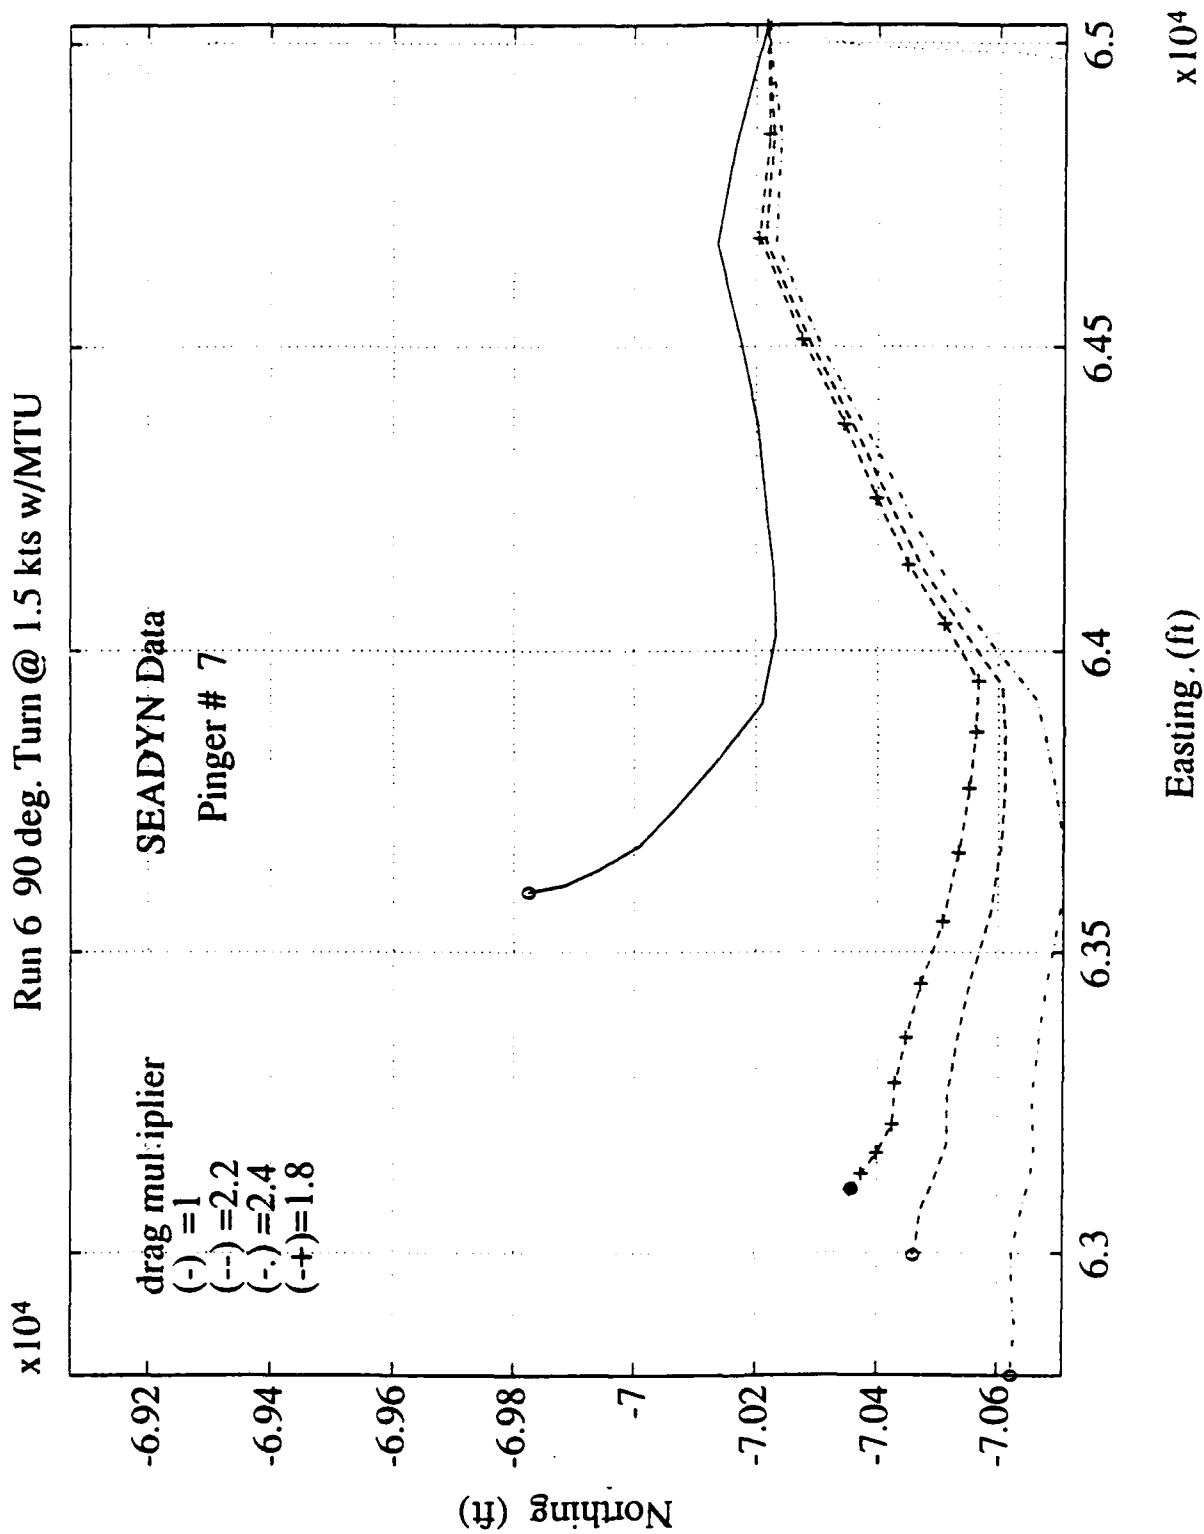


Figure C-7a. Pinger #7: effect of drag.

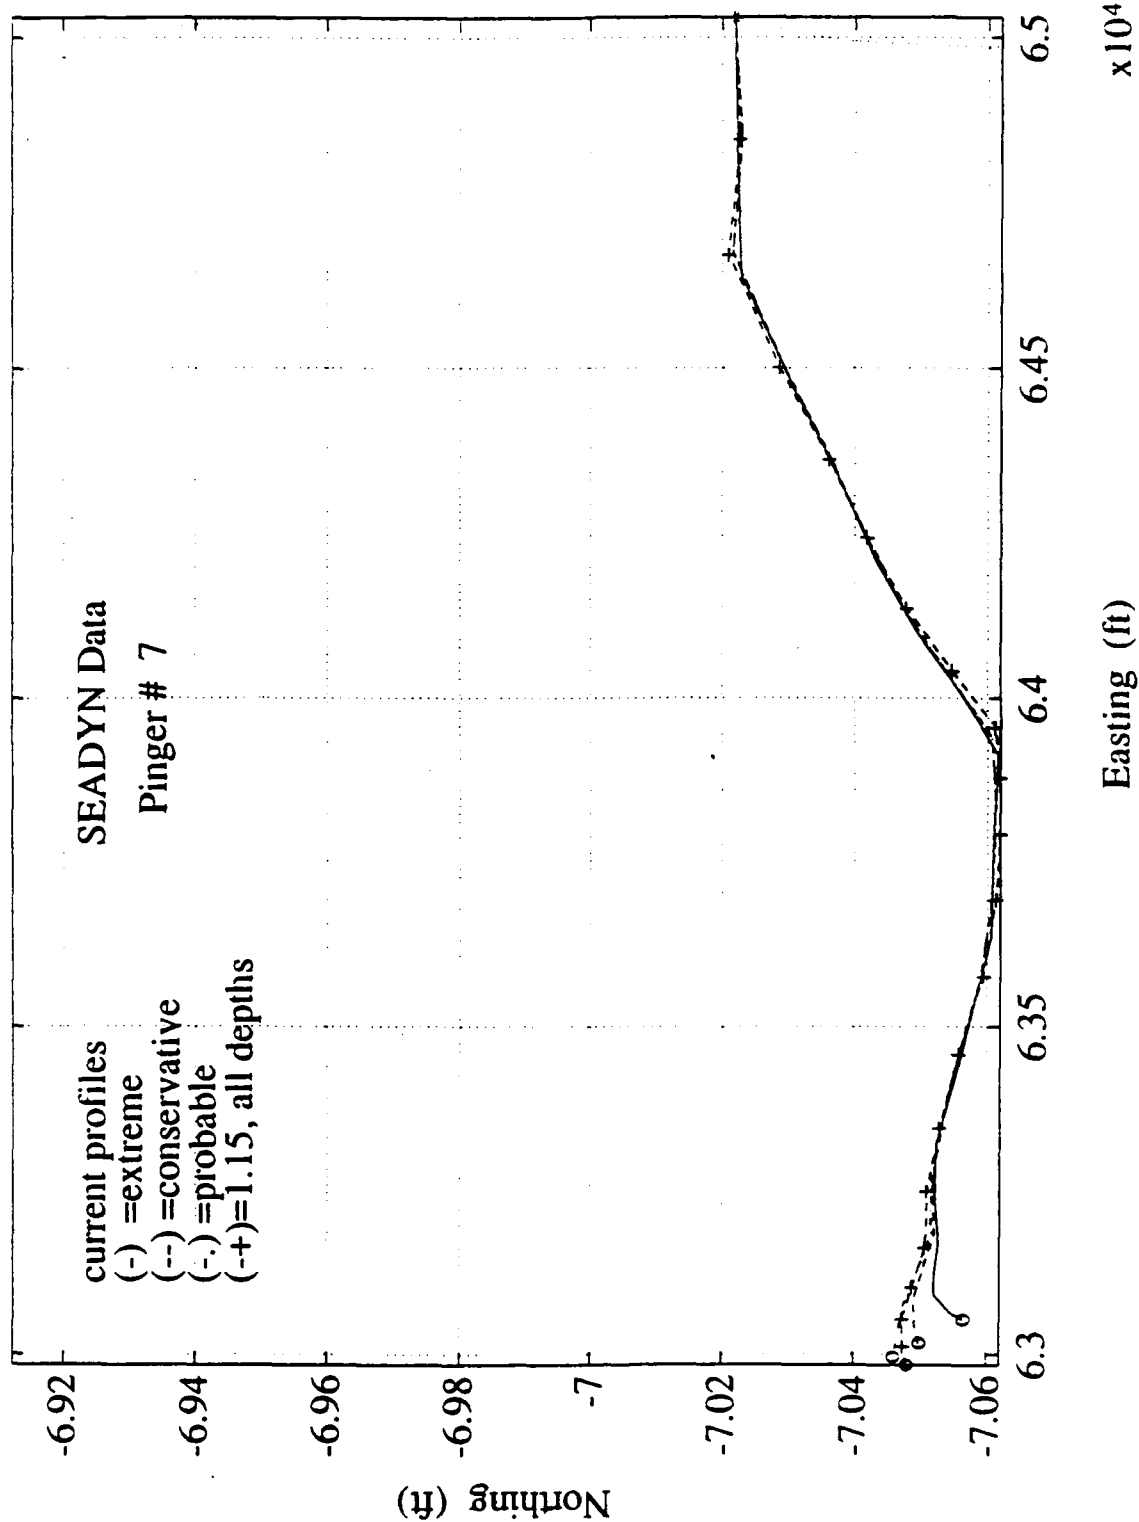


Figure C-7b. Pinger #7: effect of bottom current profile.

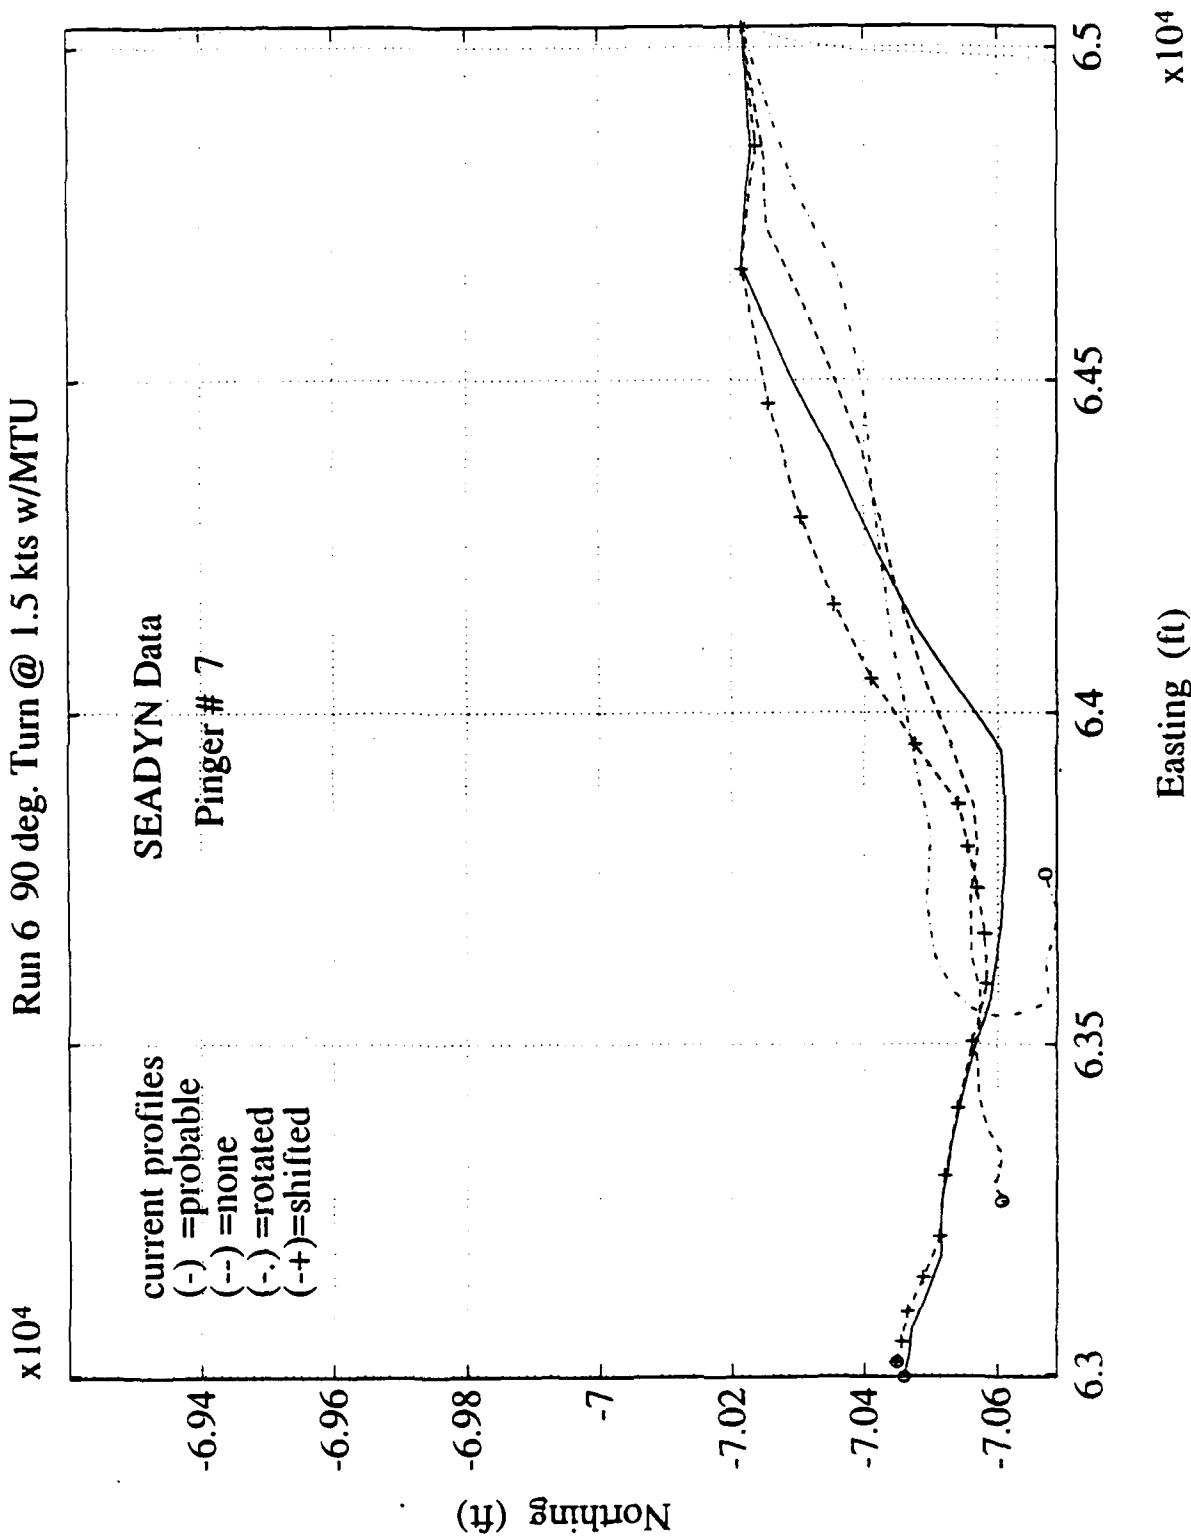


Figure C-7c. Pinger #7: effect of current profile.



## DISTRIBUTION LIST

ARCTEC, INC / CHES INSTRU DIV, TECH LIB, GLEN BURNIE, MD  
ARMY CERL / LIB, CHAMPAIGN, IL; LIB, VICKSBURG, MS  
BATTELLE NEW ENGLAND MARINE RSCH LAB / LIB, DUXBURY, MA  
BECHTEL CIVIL, INC / K. MARK, SAN FRANCISCO, CA  
BING YEN AND ASSOCIATES, INC / IRVINE, CA  
COLORADO SCHOOL OF MINES / DEPT OF ENGRG (CHUNG), GOLDEN, CO  
COM GEN FMF / PAC, SCIAD (G5), CAMP HM SMITH, HI  
COMDT COGUARD / G-ECV, WASHINGTON, DC  
DTRCEN / CO, BETHESDA, MD; CODE 172, BETHESDA, MD; CODE 1760, BETHESDA, MD; CODE 522, ANNAPOLIS, MD  
EASTPORT INTL, INC / VENTURA, CA  
EODMU / THREE, POINT MUGU, CA  
EWI ENGINEERING ASSOCIATES / JACK COX, MIDDLETON, WI  
EXXON PRODUCTION RSCH CO / OFFSHORE OP DIV, HOUSTON, TX  
FLORIDA ATLANTIC UNIV / OCEAN ENGRG DEPT (HART), BACO RATON, FL; OCEAN ENGRG DEPT (MARTIN), BOCA RATON, FL; OCEAN ENGRG DEPT (SU), BOCA RATON, FL  
HERONEMUS, W.E. / AMHERST, MA  
INST OF MARINE SCIENCES / DIR, MOREHEAD CITY, NC; LIB, PORT ARANSAS, TX  
JOHN HOPKINS UNIV / CE DEPT, JONES, BALTIMORE, MD  
JOHN J MC MULLEN ASSOC / LIB, NEW YORK, NY  
LIBRARY OF CONGRESS / SCI & TECH DIV, WASHINGTON, DC  
MAINE MARITIME ACADEMY / LIB, CASTINE, ME  
MARATHON OIL CO / GAMBLE, HOUSTON, TX  
MARITIME ADMIN / MMA, LIB, KINGS POINT, NY  
MC DERMOTT, INC / E&M DIV, NEW ORLEANS, LA  
MIT / ENGRG LIB, CAMBRIDGE, MA; LIB, TECH REPORTS, CAMBRIDGE, MA; OCEAN ENGRG DEPT (VANDIVER), CAMBRIDGE, MA  
MOBIL R&D CORP / OFFSHORE ENGRG LIB, DALLAS, TX  
NATL ACADEMY OF ENGRY / ALEXANDRIA, VA  
NATL ACADEMY OF SCIENCES / NRC, NAVAL STUDIES Bd, WASHINGTON, DC  
NAVACAD / KRIEBEL, ANNAPOLIS, MD  
NAVCOASTSYSCEN / PWO (CODE 740); TECH LIB, PANAMA CITY, FL  
NAVFACENGCOM / CODE 04A3, ALEXANDRIA, VA; CODE 04A3C, ALEXANDRIA, VA; CODE 04A4E, ALEXANDRIA, VA; CODE FPO-1C, WASHINGTON, DC  
NAVFACENGCOM LANTDIV / CODE 411, NORFOLK, VA  
NAVOCEANO / CODE 6200 (M PAIGE), NSTL, MS; LIB, NSTL, MS  
NAVSEASYS COM / CODE 56W23, WASHINGTON, DC  
NCCOSC / CODE 9642, SAN DIEGO, CA  
NOAA / JOSEPH VADUS, ROCKVILLE, MD; LIB, ROCKVILLE, MD; DATA BUOY OFFICE, NSTL, MS  
NOARL / CODE 440, NSTL, MS  
NORDA / CO, NSTL, MS; CODE 350, NSTL, MS; CODE 352, NSTL, MS; CODE 440, NSTL, MS; CODE 500, NSTL, MS  
NRAD / CODE 5204 (J. STACHIW), SAN DIEGO, CA; CODE 944 (H.C. WHEELER), SAN DIEGO, CA; CODE 944 (ROBERT WERNLI), SAN DIEGO, CA  
NRL / CODE 4670, WASHINGTON, DC  
NSWC / CODE 1235, BETHESDA, MD  
NUSC / CODE 0031 DIVING OFFR, NEWPORT, RI

NUSC DET / AUTEC ANDROS IS, ASST WPNS OFFR, FPO AA; CODE 2143 (VARLEY),  
NEW LONDON, CT; CODE 3322 (BROWN), NEW LONDON, CT; CODE 44 (MUNN), NEW  
LONDON, CT; CODE TA131, NEW LONDON, CT; LIB, NEWPORT, RI  
OCNR / CODE 1121 (EA SILVA), ARLINGTON, VA  
OREGON STATE UNIV / CE DEPT (YIM), CORVALLIS, OR; OCEANOGRAPHY SCOL,  
CORVALLIS, OR  
PORTLAND STATE UNIV / ENGRG DEPT (MIGLIORI), PORTLAND, OR  
R J BROWN & ASSOC / R PERERA, HOUSTON, TX  
SHELL OIL CO / J.D. SMITH, HOUSTON, TX  
SOUTHWEST RSCH INST / KING, SAN ANTONIO, TX  
TEXAS A&M UNIV / CE DEPT (HERBICH), COLLEGE STATION, TX; CE DEPT  
(NIEDZWECKI), COLLEGE STATION, TX; OCEAN ENGR PROJ, COLLEGE STATION,  
TX  
TRW INC / ENGR LIB, CLEVELAND, OH  
UNIV OF CALIFORNIA / CE DEPT (FENVES), BERKELEY, CA; CE DEPT (FOURNEY),  
LOS ANGELES, CA; CE DEPT (MITCHELL), BERKELEY, CA; CE DEPT (TAYLOR),  
DAVIS, CA; MECH ENGRG DEPT (TULIN), SANTA BARBARA, CA; NAVAL ARCHT  
DEPT, BERKELEY, CA  
UNIV OF DELAWARE / CE DEPT, NEWARK, DE; ENGRG COL (DEXTER), LEWES, DE  
UNIV OF HAWAII / LOOK LAB, OCEAN ENGRG, HONOLULU, HI; MANOA, LIB,  
HONOLULU, HI; OCEAN ENGRG DEPT (ERTEKIN), HONOLULU, HI; RIGGS,  
HONOLULU, HI  
UNIV OF NEW HAMPSHIRE / MARINE PROG OFFICE, DURHAM, NH  
UNIV OF RHODE ISLAND / CE DEPT (KARAMANLIDIS), KINGSTON, RI; CE DEPT  
(KOVACS), KINGSTON, RI; CE DEPT (TSIATAS), KINGSTON, RI; DR. VEYERA,  
KINGSTON, RI; PELL MARINE SCI LIB, NARRAGANSETT, RI  
UNIV OF WASHINGTON / APPLIED PHY LAB LIB, SEATTLE, WA  
USAE / CEWES-IM-MI-R, VICKSBURG, MS  
USNA / CH, MECH ENGRG DEPT (C WU), ANNAPOLIS, MD; OCEAN ENGRG DEPT,  
ANNAPOLIS, MD  
VIATEUR DE CHAMPLAIN / INST OF MARITIME ENGRG, MATANE, QUEBEC  
VSE CORP / LOWER, ALEXANDRIA, VA  
WESCR-P / HALES, VICKSBURG, MS  
WESTERN INSTRUMENT CORP / VENTURA, CA  
WESTINGHOUSE ELECTRIC CORP / OCEANIC DIV LIB, ANNAPOLIS, MD  
WOODS HOLE OCEANOGRAPHIC INST / DOC LIB, WOODS HOLE, MA  
WOODWARD-CLYDE CONSULTANTS / WEST REG, LIB, OAKLAND, CA

## DISTRIBUTION QUESTIONNAIRE

The Naval Civil Engineering Laboratory is revising its primary distribution lists.

### SUBJECT CATEGORIES

#### 1 SHORE FACILITIES

- 1A Construction methods and materials (including corrosion control, coatings)
- 1B Waterfront structures (maintenance/deterioration control)
- 1C Utilities (including power conditioning)
- 1D Explosives safety
- 1E Aviation Engineering Test Facilities
- 1F Fire prevention and control
- 1G Antenna technology
- 1H Structural analysis and design (including numerical and computer techniques)
- 1J Protective construction (including hardened shelters, shock and vibration studies)
- 1K Soil/rock mechanics
- 1L Airfields and pavements
- 1M Physical security

#### 2 ADVANCED BASE AND AMPHIBIOUS FACILITIES

- 2A Base facilities (including shelters, power generation, water supplies)
- 2B Expedient roads/airfields/bridges
- 2C Over-the-beach operations (including breakwaters, wave forces)
- 2D POL storage, transfer, and distribution
- 2E Polar engineering

#### 3 ENERGY/POWER GENERATION

- 3A Thermal conservation (thermal engineering of buildings, HVAC systems, energy loss measurement, power generation)
- 3B Controls and electrical conservation (electrical systems, energy monitoring and control systems)
- 3C Fuel flexibility (liquid fuels, coal utilization, energy from solid waste)

- 3D Alternate energy source (geothermal power, photovoltaic power systems, solar systems, wind systems, energy storage systems)

- 3E Site data and systems integration (energy resource data, integrating energy systems)

- 3F EMCS design

#### 4 ENVIRONMENTAL PROTECTION

- 4A Solid waste management
- 4B Hazardous/toxic materials management
- 4C Waterwaste management and sanitary engineering
- 4D Oil pollution removal and recovery
- 4E Air pollution
- 4F Noise abatement

#### 5 OCEAN ENGINEERING

- 5A Seafloor soils and foundations
- 5B Seafloor construction systems and operations (including diver and manipulator tools)
- 5C Undersea structures and materials
- 5D Anchors and moorings
- 5E Undersea power systems, electromechanical cables, and connectors
- 5F Pressure vessel facilities
- 5G Physical environment (including site surveying)
- 5H Ocean-based concrete structures
- 5J Hyperbaric chambers
- 5K Undersea cable dynamics

#### ARMY FEAP

- BDG Shore Facilities
- NRG Energy
- ENV Environmental/Natural Responses
- MGT Management
- PRR Pavements/Railroads

### TYPES OF DOCUMENTS

D - Techdata Sheets; R - Technical Reports and Technical Notes; G - NCEL Guides and Abstracts; I - Index to TDS; U - User Guides; ☐ None - remove my name

Old Address:

---

---

---

---

Telephone No.: \_\_\_\_\_

New Address:

---

---

---

---

Telephone No.: \_\_\_\_\_

## DISTRIBUTION QUESTIONNAIRE

The Naval Civil Engineering Laboratory is revising its primary distribution lists.

### SUBJECT CATEGORIES

#### 1 SHORE FACILITIES

- 1A Construction methods and materials (including corrosion control, coatings)
- 1B Waterfront structures (maintenance/deterioration control)
- 1C Utilities (including power conditioning)
- 1D Explosives safety
- 1E Aviation Engineering Test Facilities
- 1F Fire prevention and control
- 1G Antenna technology
- 1H Structural analysis and design (including numerical and computer techniques)
- 1J Protective construction (including hardened shelters, shock and vibration studies)
- 1K Soil/rock mechanics
- 1L Airfields and pavements
- 1M Physical security

#### 2 ADVANCED BASE AND AMPHIBIOUS FACILITIES

- 2A Base facilities (including shelters, power generation, water supplies)
- 2B Expedient roads/airfields/bridges
- 2C Over-the-beach operations (including breakwaters, wave forces)
- 2D POL storage, transfer, and distribution
- 2E Polar engineering

#### 3 ENERGY/POWER GENERATION

- 3A Thermal conservation (thermal engineering of buildings, HVAC systems, energy loss measurement, power generation)
- 3B Controls and electrical conservation (electrical systems, energy monitoring and control systems)
- 3C Fuel flexibility (liquid fuels, coal utilization, energy from solid waste)

- 3D Alternate energy source (geothermal power, photovoltaic power systems, solar systems, wind systems, energy storage systems)

- 3E Site data and systems integration (energy resource data, integrating energy systems)

- 3F EMCS design

#### 4 ENVIRONMENTAL PROTECTION

- 4A Solid waste management
- 4B Hazardous/toxic materials management
- 4C Wastewater management and sanitary engineering
- 4D Oil pollution removal and recovery
- 4E Air pollution
- 4F Noise abatement

#### 5 OCEAN ENGINEERING

- 5A Seafloor soils and foundations
- 5B Seafloor construction systems and operations (including diver and manipulator tools)
- 5C Undersea structures and materials
- 5D Anchors and moorings
- 5E Undersea power systems, electromechanical cables, and connectors
- 5F Pressure vessel facilities
- 5G Physical environment (including site surveying)
- 5H Ocean-based concrete structures
- 5J Hyperbaric chambers
- 5K Undersea cable dynamics

#### ARMY FEAP

- BDG Shore Facilities
- NRG Energy
- ENV Environmental/Natural Responses
- MGT Management
- PRR Pavements/Railroads

### TYPES OF DOCUMENTS

D - Techdata Sheets; R - Technical Reports and Technical Notes; G - NCEL Guides and Abstracts; I - Index to TDS; U - User Guides; ☐ None - remove my name

Old Address:

---

---

---

---

Telephone No.: \_\_\_\_\_

New Address:

---

---

---

---

Telephone No.: \_\_\_\_\_

## INSTRUCTIONS

The Naval Civil Engineering Laboratory has revised its primary distribution lists. To help us verify our records and update our data base, please do the following:

- Add - circle number on list
- Remove my name from all your lists - check box on list.
- Change my address - line out incorrect line and write in correction (DO NOT REMOVE LABEL).
- Number of copies should be entered after the title of the subject categories you select.
- Are we sending you the correct type of document? If not, circle the type(s) of document(s) you want to receive listed on the back of this card.

Fold on line, staple, and drop in mail.

DEPARTMENT OF THE NAVY  
Naval Civil Engineering Laboratory  
560 Laboratory Drive  
Port Hueneme CA 93043-4328

Official Business  
Penalty for Private Use, \$300



### BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12503 WASH D.C.

POSTAGE WILL BE PAID BY ADDRESSEE

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES



COMMANDING OFFICER  
CODE L34  
560 LABORATORY DRIVE  
NAVAL CIVIL ENGINEERING LABORATORY  
PORT HUENEME CA 93043-4328

## NCEL DOCUMENT EVALUATION

You are number one with us; how do we rate with you?

We at NCEL want to provide you our customer the best possible reports but we need your help. Therefore, I ask you to please take the time from your busy schedule to fill out this questionnaire. Your response will assist us in providing the best reports possible for our users. I wish to thank you in advance for your assistance. I assure you that the information you provide will help us to be more responsive to your future needs.



R. N. STORER, Ph.D., P.E.  
Technical Director

DOCUMENT NO. \_\_\_\_\_ TITLE OF DOCUMENT: \_\_\_\_\_

Date: \_\_\_\_\_ Respondent Organization : \_\_\_\_\_

Name: \_\_\_\_\_ Activity Code: \_\_\_\_\_  
Phone: \_\_\_\_\_ Grade/Rank: \_\_\_\_\_

Category (please check):

Sponsor \_\_\_\_\_ User \_\_\_\_\_ Proponent \_\_\_\_\_ Other (Specify) \_\_\_\_\_

Please answer on your behalf only; not on your organization's. Please check (use an X) only the block that most closely describes your attitude or feeling toward that statement:

SA Strongly Agree    A Agree    O Neutral    D Disagree    SD Strongly Disagree

|  | SA  | A   | N   | D   | SD  |  | SA  | A   | N   | D   | SD  |
|--|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|-----|
| 1. The technical quality of the report is comparable to most of my other sources of technical information. | ( ) | ( ) | ( ) | ( ) | ( ) | 6. The conclusions and recommendations are clear and directly supported by the contents of the report. | ( ) | ( ) | ( ) | ( ) | ( ) |
| 2. The report will make significant improvements in the cost and or performance of my operation.           | ( ) | ( ) | ( ) | ( ) | ( ) | 7. The graphics, tables, and photographs are well done.  | ( ) | ( ) | ( ) | ( ) | ( ) |
| 3. The report acknowledges related work accomplished by others.  | ( ) | ( ) | ( ) | ( ) | ( ) |  |     |     |     |     |     |
| 4. The report is well formatted.   | ( ) | ( ) | ( ) | ( ) | ( ) |  |     |     |     |     |     |
| 5. The report is clearly written.  | ( ) | ( ) | ( ) | ( ) | ( ) |  |     |     |     |     |     |

Do you wish to continue getting  
NCEL reports?

☐  
YES

☐  
NO

Please add any comments (e.g., in what ways can we improve the quality of our reports?) on the back of this form.

Comments:

Fold on line, staple, and drop in mail.

DEPARTMENT OF THE NAVY  
Naval Civil Engineering Laboratory  
560 Laboratory Drive  
Port Hueneme CA 93043-4328

Official Business  
Penalty for Private Use, \$300



**BUSINESS REPLY CARD**

FIRST CLASS PERMIT NO. 12503 WASH D.C.

POSTAGE WILL BE PAID BY ADDRESSEE

NO POSTAGE  
NECESSARY  
IF MAILED  
IN THE  
UNITED STATES



COMMANDING OFFICER  
CODE L03  
560 LABORATORY DRIVE  
NAVAL CIVIL ENGINEERING LABORATORY  
PORT HUENEME CA 93043-4328